


AGSP SERIES

STRAIN RELIEF CABLE GLAND



AGSP dimensions

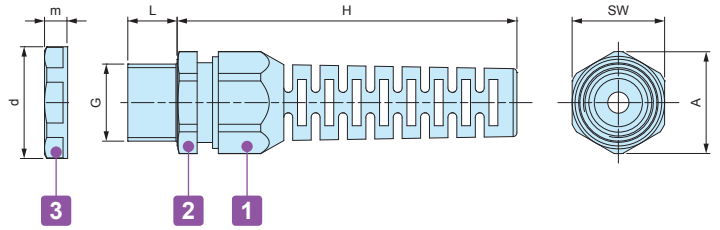

- DXF/DWG/PDF drawings available on our website.
- An optional sealing washer is required when installing on an uneven surface. (See page AGP-1 for more information on the optional sealing washer)

| Technical Data |
|---|
| Protection class:IP67 Temperature range -30°C ~ +100°C Compliant with EN50262 Ver.A |

Components

■ PA = Polyamide

| No. | Part name | Material |
|-----|-------------------|---------------|
| 1 | Strain relief cap | PA6 (UL94V-2) |
| - | Sealing insert | CR |
| 2 | Connector | PA6 (UL94V-2) |
| 3 | Lock- nut | PA6 (UL94V-2) |

Product no. / Dimensions

| Product no. | | G | | Cable range | | L | H Max | SW | A | d | m | Pack of |
|-------------|--------------|-------------|---------------|-------------|-----|------|-------|----|------|----|---|---------|
| ● Black | ● Light gray | Thread size | Mounting hole | Min | Max | | | | | | | |
| AGSP12-6.5B | AGSP12-6.5S | M12×1.5 | Φ12.2 | 3.5 | 6.5 | 12.5 | 57 | 15 | 16.7 | 19 | 5 | 1 |
| AGSP16-8B | AGSP16-8S | M16×1.5 | Φ16.2 | 5 | 8 | 12.4 | 69 | 19 | 21 | 24 | 5 | 1 |
| AGSP20-12B | AGSP20-12S | M20×1.5 | Φ20.2 | 7 | 12 | 13 | 89 | 24 | 26.5 | 29 | 6 | 1 |