AU series

NEXT GENERATION Aluminium Case

The perfect unity of flexibility, versatility, and appearance!



8 Distinct Models for Different Applications

Standard Model AU series

Standard model with front/rear sheet aluminium panels.



See page 243 ~ 248

Detachable Panel Model AUP series

Easy maintenance with detachable front/rear panels.
An EMC shielded AUPE series is also available.



See page 249 ~ 254

Control Box Model AUX series

Structure of extruded aluminium frames on 4 sides.

Suitable for control box use.

EMC shielded AUXE series is also available.



See page 261 ~ 266

Corner Guard Model AUG series

TPE Corner guard model.
An EMC shielded AUGE series and a carrying handle equipped portable AUGH series are also available.



See page 275 ~ 280

Providing versatile and flexible enclosing solutions

The aluminium case AU series has an assembly-type structure which allows it to be easily customizable. Both versatile and flexible, it is designed to be used as various devices from the classic audio amplifiers to next-gen IoT devices.
Select from a huge line-up of 430 different sizes based on your application type and ideas.

Measuring Equipment



Fiber Optic Transmitter



Audio Amplifier



Tube amplifier



Command Panel



Industrial Embedded PC



Power Supply




AUX series ALUMINIUM CONTROL BOX

NEW SIZE




- Round corner designed aluminium control box with 4 extruded aluminium frames.
- A large selection of 270 different sizes and 4 colors to choose from.
- Aluminium control box is suitable for use as industrial controller, machine controller, audio amplifier, power supply, and more.
- Feet is selectable from adhesive rubber and aluminium types.

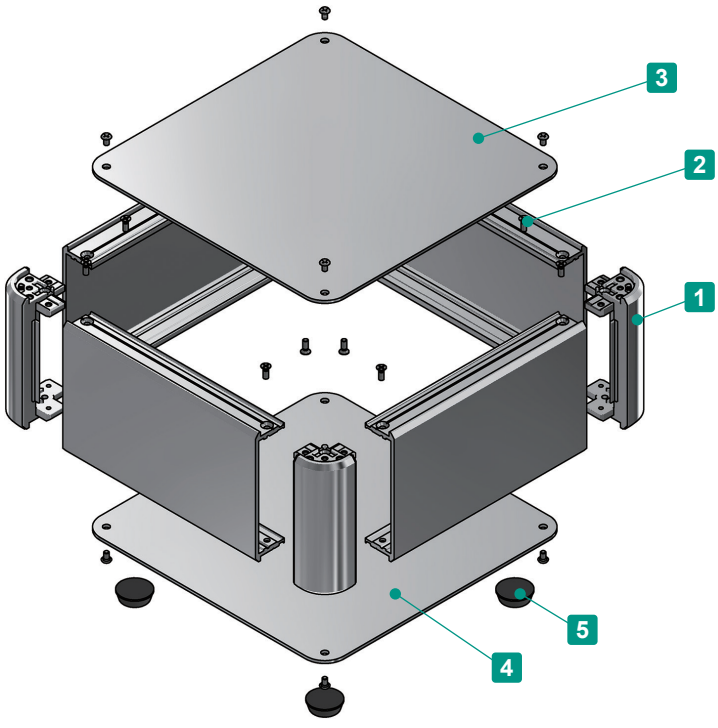

Included screws

- Top / Bottom cover
  M3-5 original trapezoid head (plus / hex) &
  Nickel plated / Black trivalent chromate x 8~16 pcs
- Frame
  M3-8 flat head & Nickel plated x 16 pcs
- Aluminium feet
  M4-8 bind head & Black trivalent chromate x 4 pcs

Recommended torque : 0.3 ~ 0.6N • m
* Recommended torque listed is for reference only; actual may differ
  Assemble after testing torque.

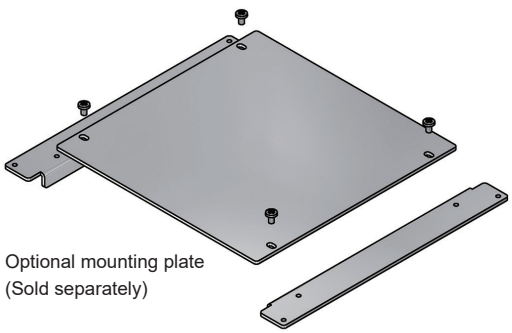

Optional mounting plate
(Sold separately)


Components

No.	Part name	Pcs	Material	Color / Finish
1	Corner block	4	Diecast aluminium ADC12	Silver • Black / Painted (Unfinished inside)
2	Frame	4	Extruded aluminium A6063S-T5	Silver • Black / Anodized
3	Top cover	1	Aluminium A1100P	Silver • Black / Anodized
4	Bottom cover	1	Aluminium A1100P	Silver • Black / Anodized
5	Adhesive Rubber feet : Aluminium feet	4	Synthetic rubber : Aluminium	Black : Silver • Black / Anodized


To select Feet, Screw, and Color, follow steps 1 ~ 3 to determine product number.

1 Feet

R Rubber (Black)

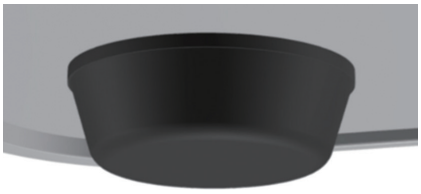

A Aluminium (Silver / Anodized) (Black / Anodized)

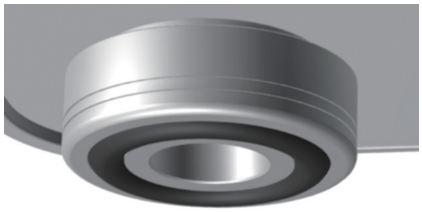


*Color of "Aluminium Feet" will be the same as bottom cover color.

2 Screw

P Plus (Silver / Nickel plated) (Black / Black trivalent chromate)



H Hex (Silver / Nickel plated) (Black / Black trivalent chromate)

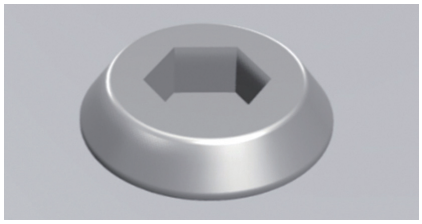

Hex wrench included.

3 Color

Please choose from the color combinations listed below.

S S



S B



B X



B B



Product Number To determine a product number, fill H-W-D dimensions and select Feet, Screw, and Color code in the following blank boxes.

AUX □ - □ - □ □ □ - □ □


H-W-D dimensions — See page 264~266 for dimensions and product no.

1 Feet R or A — **2 Screw** P or H — **3 Color** SS • SB • BX • BB


Numbering example :
If looking at "H66 x W250 x D250mm, Feet type R, Screw type H, Color type BX"

➡ **AUX 66-25-25 RH-BX**

Accessories (Optional parts)



Mounting plate AUC series
See page 293 ~ 294



Corner guard AUCG series
See page 294



Elastomer carrying handle FM200
See website



Aluminium handle OH series
See website



Wall mount support arm MAR series
See page 273 ~ 274




APPLICATION EXAMPLE

Operation panel



AUX dimensions

■ DXF/DWG/PDF/STP drawings available on our website.

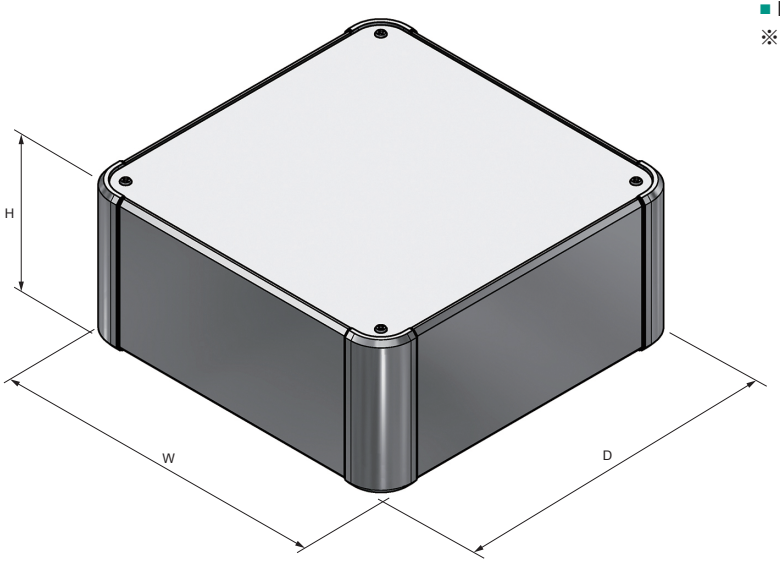

■ Feet is selectable from adhesive rubber and aluminium types.
※Rubber and aluminium feet height are different.

Rubber Feet



Aluminium Feet



Product no. / Details

■ Please suffix color code at the end of the product number.

Product no.	H	W	D	Weight (kg)
AUX 44-16-16□□-□□	44	160	160	0.7
AUX 44-20-16□□-□□	44	200	160	0.8
AUX 44-20-20□□-□□	44	200	200	0.9
AUX 44-25-16□□-□□	44	250	160	1.0
AUX 44-25-20□□-□□	44	250	200	1.1
AUX 44-25-25□□-□□	44	250	250	1.3
AUX 44-30-16□□-□□	44	300	160	1.1
AUX 44-30-20□□-□□	44	300	200	1.3
AUX 44-30-25□□-□□	44	300	250	1.5
AUX 44-30-30□□-□□	44	300	300	1.7
AUX 44-36-16□□-□□	44	360	160	1.3
AUX 44-36-20□□-□□	44	360	200	1.5
AUX 44-36-25□□-□□	44	360	250	1.7
AUX 44-36-30□□-□□	44	360	300	2.0
AUX 44-36-36□□-□□	44	360	360	2.2
AUX 44-43-16□□-□□	44	430	160	1.5
AUX 44-43-20□□-□□	44	430	200	1.7
AUX 44-43-25□□-□□	44	430	250	2.0
AUX 44-43-30□□-□□	44	430	300	2.3
AUX 44-43-36□□-□□	44	430	360	2.6
AUX 44-43-43□□-□□	44	430	430	3.0
AUX 44-50-30□□-□□	44	500	300	2.6
AUX 44-50-36□□-□□	44	500	360	3.0
AUX 44-50-43□□-□□	44	500	430	3.4
AUX 44-50-50□□-□□	44	500	500	3.9
AUX 44-60-36□□-□□	44	600	360	3.5
AUX 44-60-43□□-□□	44	600	430	4.0

Product no.	H	W	D	Weight (kg)
AUX 66-16-16□□-□□	66	160	160	0.9
AUX 66-20-16□□-□□	66	200	160	1.0
AUX 66-20-20□□-□□	66	200	200	1.1
AUX 66-25-16□□-□□	66	250	160	1.2
AUX 66-25-20□□-□□	66	250	200	1.3
AUX 66-25-25□□-□□	66	250	250	1.5
AUX 66-30-16□□-□□	66	300	160	1.3
AUX 66-30-20□□-□□	66	300	200	1.5
AUX 66-30-25□□-□□	66	300	250	1.7
AUX 66-30-30□□-□□	66	300	300	2.0
AUX 66-36-16□□-□□	66	360	160	1.4
AUX 66-36-20□□-□□	66	360	200	1.7
AUX 66-36-25□□-□□	66	360	250	2.0
AUX 66-36-30□□-□□	66	360	300	2.2
AUX 66-36-36□□-□□	66	360	360	2.6
AUX 66-43-16□□-□□	66	430	160	1.7
AUX 66-43-20□□-□□	66	430	200	2.0
AUX 66-43-25□□-□□	66	430	250	2.3
AUX 66-43-30□□-□□	66	430	300	2.6
AUX 66-43-36□□-□□	66	430	360	3.0
AUX 66-43-43□□-□□	66	430	430	3.4
AUX 66-50-30□□-□□	66	500	300	2.9
AUX 66-50-36□□-□□	66	500	360	3.3
AUX 66-50-43□□-□□	66	500	430	3.8
AUX 66-50-50□□-□□	66	500	500	4.3
AUX 66-60-36□□-□□	66	600	360	3.8
AUX 66-60-43□□-□□	66	600	430	4.4

Product no. / Details

■ Please suffix color code at the end of the product number.

Product no.	H	W	D	Weight (kg)
AUX 88-16-16□□-□□	88	160	160	1.0
AUX 88-20-16□□-□□	88	200	160	1.1
AUX 88-20-20□□-□□	88	200	200	1.3
AUX 88-25-16□□-□□	88	250	160	1.3
AUX 88-25-20□□-□□	88	250	200	1.5
AUX 88-25-25□□-□□	88	250	250	1.7
AUX 88-30-16□□-□□	88	300	160	1.5
AUX 88-30-20□□-□□	88	300	200	1.7
AUX 88-30-25□□-□□	88	300	250	1.9
AUX 88-30-30□□-□□	88	300	300	2.2
AUX 88-36-16□□-□□	88	360	160	1.6
AUX 88-36-20□□-□□	88	360	200	1.9
AUX 88-36-25□□-□□	88	360	250	2.2
AUX 88-36-30□□-□□	88	360	300	2.4
AUX 88-36-36□□-□□	88	360	360	2.8
AUX 88-43-16□□-□□	88	430	160	1.9
AUX 88-43-20□□-□□	88	430	200	2.2
AUX 88-43-25□□-□□	88	430	250	2.5
AUX 88-43-30□□-□□	88	430	300	2.8
AUX 88-43-36□□-□□	88	430	360	3.2
AUX 88-43-43□□-□□	88	430	430	3.6
AUX 88-50-30□□-□□	88	500	300	3.2
AUX 88-50-36□□-□□	88	500	360	3.6
AUX 88-50-43□□-□□	88	500	430	4.1
AUX 88-50-50□□-□□	88	500	500	4.6
AUX 88-60-36□□-□□	88	600	360	4.1
AUX 88-60-43□□-□□	88	600	430	4.7
NEW AUX 99-16-16□□-□□	99	160	160	1.0
NEW AUX 99-20-16□□-□□	99	200	160	1.1
NEW AUX 99-20-20□□-□□	99	200	200	1.3
NEW AUX 99-25-16□□-□□	99	250	160	1.3
NEW AUX 99-25-20□□-□□	99	250	200	1.5
NEW AUX 99-25-25□□-□□	99	250	250	1.7
NEW AUX 99-30-16□□-□□	99	300	160	1.5
NEW AUX 99-30-20□□-□□	99	300	200	1.7
NEW AUX 99-30-25□□-□□	99	300	250	1.9
NEW AUX 99-30-30□□-□□	99	300	300	2.2
NEW AUX 99-36-16□□-□□	99	360	160	1.7
NEW AUX 99-36-20□□-□□	99	360	200	1.9
NEW AUX 99-36-25□□-□□	99	360	250	2.2
NEW AUX 99-36-30□□-□□	99	360	300	2.5
NEW AUX 99-36-36□□-□□	99	360	360	2.8
NEW AUX 99-43-16□□-□□	99	430	160	2.0
NEW AUX 99-43-20□□-□□	99	430	200	2.2
NEW AUX 99-43-25□□-□□	99	430	250	2.5
NEW AUX 99-43-30□□-□□	99	430	300	2.9
NEW AUX 99-43-36□□-□□	99	430	360	3.3
NEW AUX 99-43-43□□-□□	99	430	430	3.7
NEW AUX 99-50-30□□-□□	99	500	300	3.2
NEW AUX 99-50-36□□-□□	99	500	360	3.7
NEW AUX 99-50-43□□-□□	99	500	430	4.2
NEW AUX 99-50-50□□-□□	99	500	500	4.7
NEW AUX 99-60-36□□-□□	99	600	360	4.2
NEW AUX 99-60-43□□-□□	99	600	430	4.8

Product no.	H	W	D	Weight (kg)
NEW AUX115-16-16□□-□□	115	160	160	1.1
NEW AUX115-20-16□□-□□	115	200	160	1.2
NEW AUX115-20-20□□-□□	115	200	200	1.4
NEW AUX115-25-16□□-□□	115	250	160	1.4
NEW AUX115-25-20□□-□□	115	250	200	1.6
NEW AUX115-25-25□□-□□	115	250	250	1.8
NEW AUX115-30-16□□-□□	115	300	160	1.6
NEW AUX115-30-20□□-□□	115	300	200	1.8
NEW AUX115-30-25□□-□□	115	300	250	2.1
NEW AUX115-30-30□□-□□	115	300	300	2.3
NEW AUX115-36-16□□-□□	115	360	160	1.8
NEW AUX115-36-20□□-□□	115	360	200	2.0
NEW AUX115-36-25□□-□□	115	360	250	2.3
NEW AUX115-36-30□□-□□	115	360	300	2.6
NEW AUX115-36-36□□-□□	115	360	360	3.0
NEW AUX115-43-16□□-□□	115	430	160	2.1
NEW AUX115-43-20□□-□□	115	430	200	2.4
NEW AUX115-43-25□□-□□	115	430	250	2.7
NEW AUX115-43-30□□-□□	115	430	300	3.0
NEW AUX115-43-36□□-□□	115	430	360	3.4
NEW AUX115-43-43□□-□□	115	430	430	3.9
NEW AUX115-50-30□□-□□	115	500	300	3.4
NEW AUX115-50-36□□-□□	115	500	360	3.9
NEW AUX115-50-43□□-□□	115	500	430	4.4
NEW AUX115-50-50□□-□□	115	500	500	4.9
NEW AUX115-60-36□□-□□	115	600	360	4.4
NEW AUX115-60-43□□-□□	115	600	430	5.0
AUX133-16-16□□-□□	132.5	160	160	1.3
AUX133-20-16□□-□□	132.5	200	160	1.5
AUX133-20-20□□-□□	132.5	200	200	1.7
AUX133-25-16□□-□□	132.5	250	160	1.7
AUX133-25-20□□-□□	132.5	250	200	1.9
AUX133-25-25□□-□□	132.5	250	250	2.2
AUX133-30-16□□-□□	132.5	300	160	1.9
AUX133-30-20□□-□□	132.5	300	200	2.1
AUX133-30-25□□-□□	132.5	300	250	2.4
AUX133-30-30□□-□□	132.5	300	300	2.7
AUX133-36-16□□-□□	132.5	360	160	2.2
AUX133-36-20□□-□□	132.5	360	200	2.4
AUX133-36-25□□-□□	132.5	360	250	2.7
AUX133-36-30□□-□□	132.5	360	300	3.1
AUX133-36-36□□-□□	132.5	360	360	3.4
AUX133-43-16□□-□□	132.5	430	160	2.5
AUX133-43-20□□-□□	132.5	430	200	2.8
AUX133-43-25□□-□□	132.5	430	250	3.1
AUX133-43-30□□-□□	132.5	430	300	3.5
AUX133-43-36□□-□□	132.5	430	360	3.9
AUX133-43-43□□-□□	132.5	430	430	4.4
AUX133-50-30□□-□□	132.5	500	300	3.9
AUX133-50-36□□-□□	132.5	500	360	4.4
AUX133-50-43□□-□□	132.5	500	430	4.9
AUX133-50-50□□-□□	132.5	500	500	5.5
AUX133-60-36□□-□□	132.5	600	360	5.0
AUX133-60-43□□-□□	132.5	600	430	5.7

Product no. / Details

■ Please suffix color code at the end of the product number.


Product no.	H	W	D	Weight (kg)
NEW AUX149-16-16□□-□□	149	160	160	1.3
NEW AUX149-20-16□□-□□	149	200	160	1.5
NEW AUX149-20-20□□-□□	149	200	200	1.7
NEW AUX149-25-16□□-□□	149	250	160	1.7
NEW AUX149-25-20□□-□□	149	250	200	1.9
NEW AUX149-25-25□□-□□	149	250	250	2.2
NEW AUX149-30-16□□-□□	149	300	160	2.0
NEW AUX149-30-20□□-□□	149	300	200	2.2
NEW AUX149-30-25□□-□□	149	300	250	2.5
NEW AUX149-30-30□□-□□	149	300	300	2.8
NEW AUX149-36-16□□-□□	149	360	160	2.2
NEW AUX149-36-20□□-□□	149	360	200	2.5
NEW AUX149-36-25□□-□□	149	360	250	2.8
NEW AUX149-36-30□□-□□	149	360	300	3.2
NEW AUX149-36-36□□-□□	149	360	360	3.6
NEW AUX149-43-16□□-□□	149	430	160	2.6
NEW AUX149-43-20□□-□□	149	430	200	2.9
NEW AUX149-43-25□□-□□	149	430	250	3.3
NEW AUX149-43-30□□-□□	149	430	300	3.6
NEW AUX149-43-36□□-□□	149	430	360	4.1
NEW AUX149-43-43□□-□□	149	430	430	4.6
NEW AUX149-50-30□□-□□	149	500	300	4.1
NEW AUX149-50-36□□-□□	149	500	360	4.6
NEW AUX149-50-43□□-□□	149	500	430	5.1
NEW AUX149-50-50□□-□□	149	500	500	5.7
NEW AUX149-60-36□□-□□	149	600	360	5.2
NEW AUX149-60-43□□-□□	149	600	430	5.9
AUX177-16-16□□-□□	177	160	160	1.5
AUX177-20-16□□-□□	177	200	160	1.7
AUX177-20-20□□-□□	177	200	200	1.9
AUX177-25-16□□-□□	177	250	160	1.9
AUX177-25-20□□-□□	177	250	200	2.2
AUX177-25-25□□-□□	177	250	250	2.5
AUX177-30-16□□-□□	177	300	160	2.2
AUX177-30-20□□-□□	177	300	200	2.4
AUX177-30-25□□-□□	177	300	250	2.8
AUX177-30-30□□-□□	177	300	300	3.1
AUX177-36-16□□-□□	177	360	160	2.5
AUX177-36-20□□-□□	177	360	200	2.8
AUX177-36-25□□-□□	177	360	250	3.1
AUX177-36-30□□-□□	177	360	300	3.5
AUX177-36-36□□-□□	177	360	360	3.9
AUX177-43-16□□-□□	177	430	160	2.9
AUX177-43-20□□-□□	177	430	200	3.2
AUX177-43-25□□-□□	177	430	250	3.6
AUX177-43-30□□-□□	177	430	300	4.0
AUX177-43-36□□-□□	177	430	360	4.5
AUX177-43-43□□-□□	177	430	430	5.0
AUX177-50-30□□-□□	177	500	300	4.4
AUX177-50-36□□-□□	177	500	360	5.0
AUX177-50-43□□-□□	177	500	430	5.6
AUX177-50-50□□-□□	177	500	500	6.2
AUX177-60-36□□-□□	177	600	360	5.7
AUX177-60-43□□-□□	177	600	430	6.4

Product no.	H	W	D	Weight (kg)
NEW AUX222-16-16□□-□□	221.5	161	161	1.7
NEW AUX222-20-16□□-□□	221.5	201	161	2.0
NEW AUX222-20-20□□-□□	221.5	201	201	2.2
NEW AUX222-25-16□□-□□	221.5	251	161	2.3
NEW AUX222-25-20□□-□□	221.5	251	201	2.5
NEW AUX222-25-25□□-□□	221.5	251	251	2.9
NEW AUX222-30-16□□-□□	221.5	301	161	2.5
NEW AUX222-30-20□□-□□	221.5	301	201	2.8
NEW AUX222-30-25□□-□□	221.5	301	251	3.2
NEW AUX222-30-30□□-□□	221.5	301	301	3.6
NEW AUX222-36-16□□-□□	221.5	361	161	2.9
NEW AUX222-36-20□□-□□	221.5	361	201	3.2
NEW AUX222-36-25□□-□□	221.5	361	251	3.6
NEW AUX222-36-30□□-□□	221.5	361	301	4.0
NEW AUX222-36-36□□-□□	221.5	361	361	4.5
NEW AUX222-43-16□□-□□	221.5	431	161	3.3
NEW AUX222-43-20□□-□□	221.5	431	201	3.7
NEW AUX222-43-25□□-□□	221.5	431	251	4.1
NEW AUX222-43-30□□-□□	221.5	431	301	4.5
NEW AUX222-43-36□□-□□	221.5	431	361	5.1
NEW AUX222-43-43□□-□□	221.5	431	431	5.7
NEW AUX222-50-30□□-□□	221.5	501	301	5.0
NEW AUX222-50-36□□-□□	221.5	501	361	5.6
NEW AUX222-50-43□□-□□	221.5	501	431	6.3
NEW AUX222-50-50□□-□□	221.5	501	501	6.9
NEW AUX222-60-36□□-□□	221.5	601	361	6.4
NEW AUX222-60-43□□-□□	221.5	601	431	7.1
NEW AUX266-16-16□□-□□	265.9	161	161	2.1
NEW AUX266-20-16□□-□□	265.9	201	161	2.4
NEW AUX266-20-20□□-□□	265.9	201	201	2.7
NEW AUX266-25-16□□-□□	265.9	251	161	2.8
NEW AUX266-25-20□□-□□	265.9	251	201	3.1
NEW AUX266-25-25□□-□□	265.9	251	251	3.5
NEW AUX266-30-16□□-□□	265.9	301	161	3.1
NEW AUX266-30-20□□-□□	265.9	301	201	3.5
NEW AUX266-30-25□□-□□	265.9	301	251	3.9
NEW AUX266-30-30□□-□□	265.9	301	301	4.4
NEW AUX266-36-16□□-□□	265.9	361	161	3.6
NEW AUX266-36-20□□-□□	265.9	361	201	4.0
NEW AUX266-36-25□□-□□	265.9	361	251	4.4
NEW AUX266-36-30□□-□□	265.9	361	301	4.9
NEW AUX266-36-36□□-□□	265.9	361	361	5.4
NEW AUX266-43-16□□-□□	265.9	431	161	4.1
NEW AUX266-43-20□□-□□	265.9	431	201	4.5
NEW AUX266-43-25□□-□□	265.9	431	251	5.0
NEW AUX266-43-30□□-□□	265.9	431	301	5.5
NEW AUX266-43-36□□-□□	265.9	431	361	6.1
NEW AUX266-43-43□□-□□	265.9	431	431	6.8
NEW AUX266-50-30□□-□□	265.9	501	301	6.1
NEW AUX266-50-36□□-□□	265.9	501	361	6.8
NEW AUX266-50-43□□-□□	265.9	501	431	7.5
NEW AUX266-50-50□□-□□	265.9	501	501	8.3
NEW AUX266-60-36□□-□□	265.9	601	361	7.7
NEW AUX266-60-43□□-□□	265.9	601	431	8.5


AUXE series EMC SHIELDED ALUMINIUM CONTROL BOX

NEW SIZE

EMC Shielding

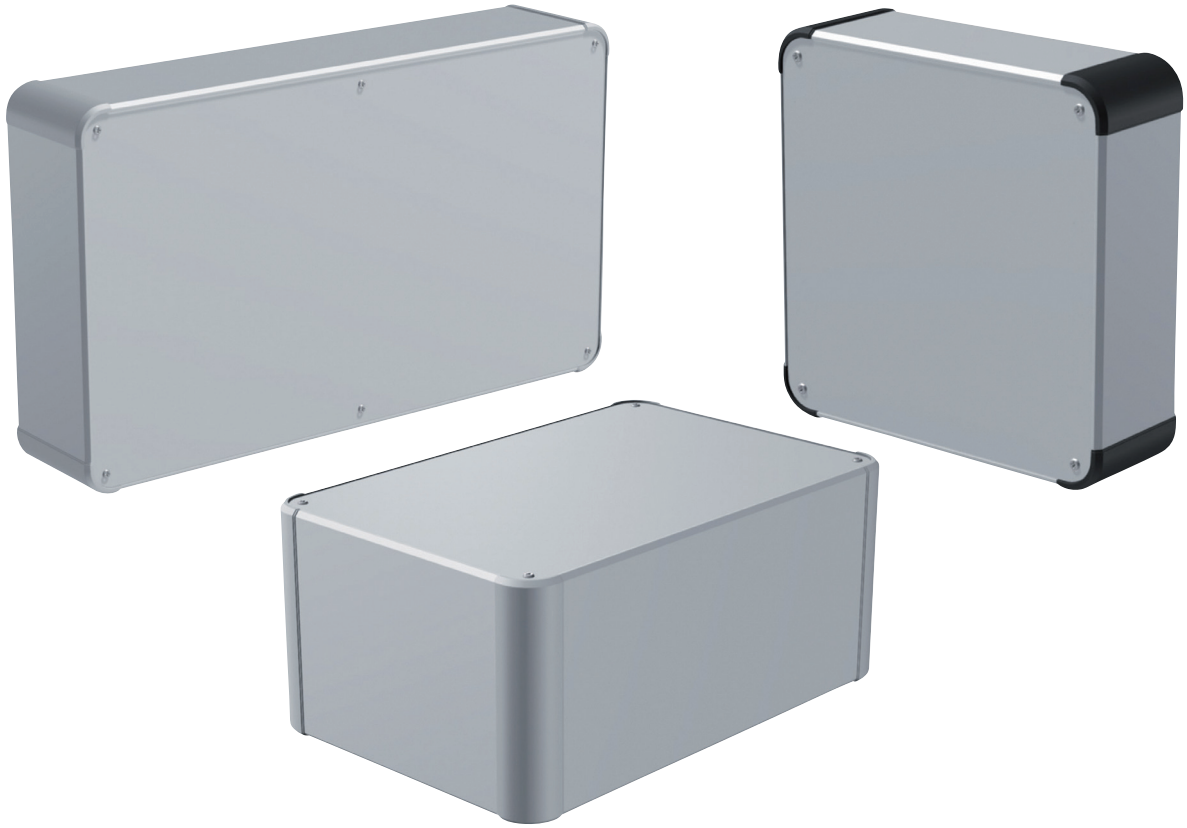

- Round corner designed aluminium enclosure with 4 extruded aluminium frames.
- Shielding gasket allows the enclosure to be EMC shielded.
- A large selection of 270 different sizes and 2 colors to choose from.
- Feet is selectable from adhesive rubber and aluminium types.

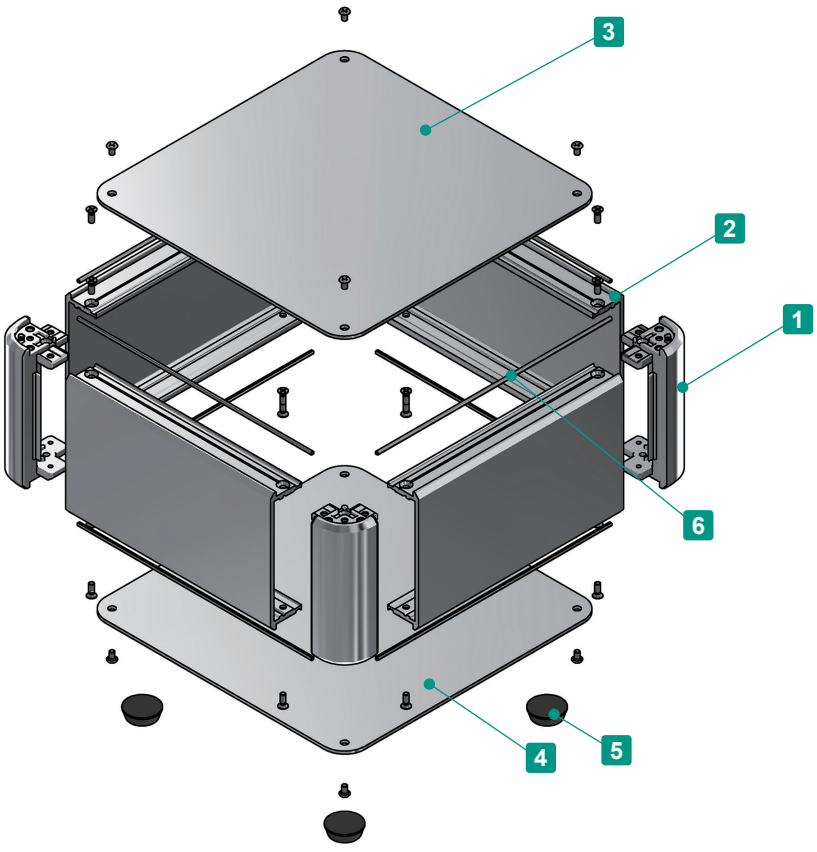

Included screws

- Top / Bottom cover
  M3-5 original trapezoid head (plus / hex) & Nickel plated x 8~16 pcs
- Frame
  M3-8 flat head & Nickel plated x 16 pcs
- Aluminium feet
  M4-8 bind head & Black trivalent chromate x 4 pcs

Recommended torque : 0.3 ~ 0.6N • m
* Recommended torque listed is for reference only; actual may differ.
  Assemble after testing torque.


Components

No.	Part name	Pcs	Material	Color / Finish
1	Corner block	4	Diecast aluminium ADC12	Silver • Black / Painted (Unfinished inside)
2	Frame	4	Extruded aluminium A6063S-T5	Silver / Painted (Unfinished inside)
3	Top cover	1	Aluminium A1100P	Silver / Painted (Conductive inside)
4	Bottom cover	1	Aluminium A1100P	Silver / Painted (Conductive inside)
5	Adhesive Rubber feet : Aluminium feet	4	Synthetic rubber : Aluminium	Black : Silver / Anodized
6	EMC shielding gasket	8	Conductive fiber UL94V-0	Metallic gray


To select Feet, Screw, and Color, follow steps 1 ~ 3 to determine product number.

1 Feet

R Rubber (Black)

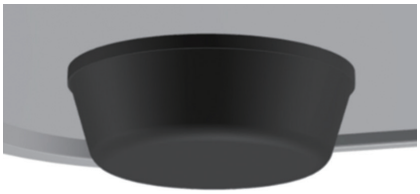

A Aluminium (Silver / Anodized)

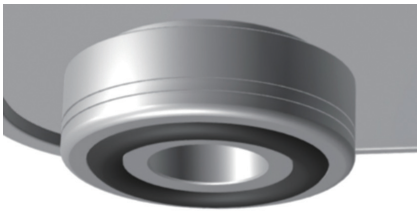


2 Screw

P Plus (Silver / Nickel plated)



H Hex (Silver / Nickel plated)

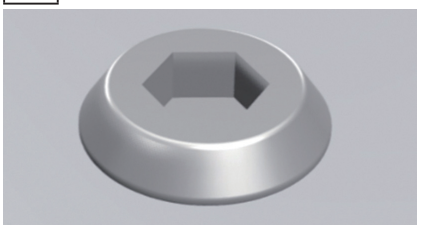

Hex wrench included.

3 Color

Please choose from the color combinations listed below.

S S



S B



Product Number To determine a product number, fill H-W-D dimensions and select Feet, Screw, and Color code in the following blank boxes.

AUXE □ - □ - □ □ □ - □ □


H-W-D dimensions | 1 Feet | 2 Screw | 3 Color

See page 270~272 for dimensions and product no. R or A | P or H | SS or SB


Numbering example :
If looking at "H132.5 x W300 x D300mm, Feet type R, Screw type P, Color type SB"

➡ **AUXE 133-30-30 RP-SB**

Accessories (Optional parts)



Mounting plate AUC series
See page 293 ~ 294



Corner guard AUCG series
See page 294



Elastomer carrying handle FM200
See website




Aluminium handle OH series
See website



Wall mount support arm MAR series
See page 273 ~ 274

AUXE dimensions

■ DXF/DWG/PDF/STP drawings available on our website.

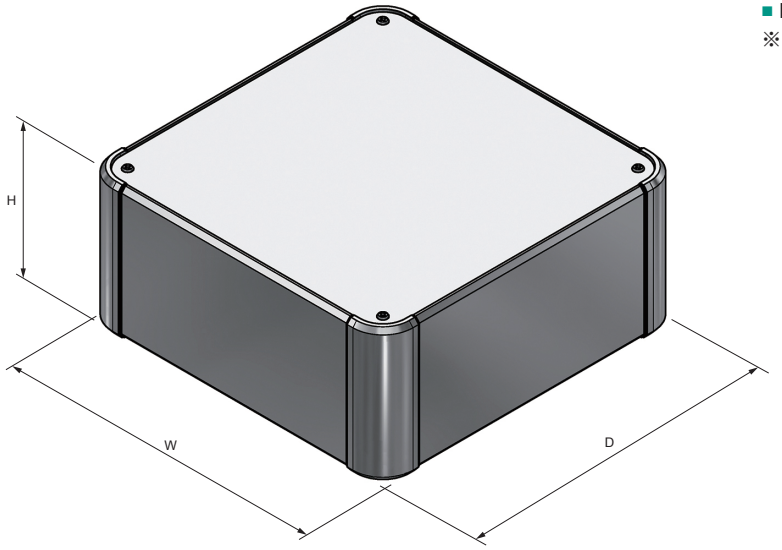

■ Feet is selectable from adhesive rubber and aluminium types.
※Rubber and aluminium feet height are different.

Rubber Feet



Aluminium Feet



Product no. / Details

■ Please suffix color code at the end of the product number.

Product no.	H	W	D	Weight (kg)
AUXE 44-16-16□□-□□	44	160	160	0.7
AUXE 44-20-16□□-□□	44	200	160	0.8
AUXE 44-20-20□□-□□	44	200	200	0.9
AUXE 44-25-16□□-□□	44	250	160	1.0
AUXE 44-25-20□□-□□	44	250	200	1.1
AUXE 44-25-25□□-□□	44	250	250	1.3
AUXE 44-30-16□□-□□	44	300	160	1.1
AUXE 44-30-20□□-□□	44	300	200	1.3
AUXE 44-30-25□□-□□	44	300	250	1.5
AUXE 44-30-30□□-□□	44	300	300	1.7
AUXE 44-36-16□□-□□	44	360	160	1.2
AUXE 44-36-20□□-□□	44	360	200	1.5
AUXE 44-36-25□□-□□	44	360	250	1.7
AUXE 44-36-30□□-□□	44	360	300	2.0
AUXE 44-36-36□□-□□	44	360	360	2.3
AUXE 44-43-16□□-□□	44	430	160	1.5
AUXE 44-43-20□□-□□	44	430	200	1.7
AUXE 44-43-25□□-□□	44	430	250	2.0
AUXE 44-43-30□□-□□	44	430	300	2.3
AUXE 44-43-36□□-□□	44	430	360	2.6
AUXE 44-43-43□□-□□	44	430	430	3.0
AUXE 44-50-30□□-□□	44	500	300	2.6
AUXE 44-50-36□□-□□	44	500	360	3.0
AUXE 44-50-43□□-□□	44	500	430	3.4
AUXE 44-50-50□□-□□	44	500	500	3.9
AUXE 44-60-36□□-□□	44	600	360	3.5
AUXE 44-60-43□□-□□	44	600	430	4.0

Product no.	H	W	D	Weight (kg)
AUXE 66-16-16□□-□□	66	160	160	0.9
AUXE 66-20-16□□-□□	66	200	160	1.0
AUXE 66-20-20□□-□□	66	200	200	1.1
AUXE 66-25-16□□-□□	66	250	160	1.2
AUXE 66-25-20□□-□□	66	250	200	1.3
AUXE 66-25-25□□-□□	66	250	250	1.5
AUXE 66-30-16□□-□□	66	300	160	1.3
AUXE 66-30-20□□-□□	66	300	200	1.5
AUXE 66-30-25□□-□□	66	300	250	1.7
AUXE 66-30-30□□-□□	66	300	300	2.0
AUXE 66-36-16□□-□□	66	360	160	1.4
AUXE 66-36-20□□-□□	66	360	200	1.7
AUXE 66-36-25□□-□□	66	360	250	2.0
AUXE 66-36-30□□-□□	66	360	300	2.2
AUXE 66-36-36□□-□□	66	360	360	2.6
AUXE 66-43-16□□-□□	66	430	160	1.8
AUXE 66-43-20□□-□□	66	430	200	2.0
AUXE 66-43-25□□-□□	66	430	250	2.3
AUXE 66-43-30□□-□□	66	430	300	2.6
AUXE 66-43-36□□-□□	66	430	360	3.0
AUXE 66-43-43□□-□□	66	430	430	3.4
AUXE 66-50-30□□-□□	66	500	300	2.9
AUXE 66-50-36□□-□□	66	500	360	3.3
AUXE 66-50-43□□-□□	66	500	430	3.8
AUXE 66-50-50□□-□□	66	500	500	4.3
AUXE 66-60-36□□-□□	66	600	360	3.8
AUXE 66-60-43□□-□□	66	600	430	4.4

Product no. / Details

■ Please suffix color code at the end of the product number.

Product no.	H	W	D	Weight (kg)
AUXE 88-16-16□□-□□	88	160	160	1.0
AUXE 88-20-16□□-□□	88	200	160	1.1
AUXE 88-20-20□□-□□	88	200	200	1.3
AUXE 88-25-16□□-□□	88	250	160	1.3
AUXE 88-25-20□□-□□	88	250	200	1.5
AUXE 88-25-25□□-□□	88	250	250	1.7
AUXE 88-30-16□□-□□	88	300	160	1.5
AUXE 88-30-20□□-□□	88	300	200	1.7
AUXE 88-30-25□□-□□	88	300	250	1.9
AUXE 88-30-30□□-□□	88	300	300	2.2
AUXE 88-36-16□□-□□	88	360	160	1.6
AUXE 88-36-20□□-□□	88	360	200	1.9
AUXE 88-36-25□□-□□	88	360	250	2.2
AUXE 88-36-30□□-□□	88	360	300	2.4
AUXE 88-36-36□□-□□	88	360	360	2.8
AUXE 88-43-16□□-□□	88	430	160	1.9
AUXE 88-43-20□□-□□	88	430	200	2.2
AUXE 88-43-25□□-□□	88	430	250	2.5
AUXE 88-43-30□□-□□	88	430	300	2.8
AUXE 88-43-36□□-□□	88	430	360	3.2
AUXE 88-43-43□□-□□	88	430	430	3.6
AUXE 88-50-30□□-□□	88	500	300	3.2
AUXE 88-50-36□□-□□	88	500	360	3.6
AUXE 88-50-43□□-□□	88	500	430	4.1
AUXE 88-50-50□□-□□	88	500	500	4.6
AUXE 88-60-36□□-□□	88	600	360	4.1
AUXE 88-60-43□□-□□	88	600	430	4.7
NEW AUXE 99-16-16□□-□□	99	160	160	1.0
NEW AUXE 99-20-16□□-□□	99	200	160	1.1
NEW AUXE 99-20-20□□-□□	99	200	200	1.3
NEW AUXE 99-25-16□□-□□	99	250	160	1.3
NEW AUXE 99-25-20□□-□□	99	250	200	1.5
NEW AUXE 99-25-25□□-□□	99	250	250	1.7
NEW AUXE 99-30-16□□-□□	99	300	160	1.5
NEW AUXE 99-30-20□□-□□	99	300	200	1.7
NEW AUXE 99-30-25□□-□□	99	300	250	1.9
NEW AUXE 99-30-30□□-□□	99	300	300	2.2
NEW AUXE 99-36-16□□-□□	99	360	160	1.7
NEW AUXE 99-36-20□□-□□	99	360	200	1.9
NEW AUXE 99-36-25□□-□□	99	360	250	2.2
NEW AUXE 99-36-30□□-□□	99	360	300	2.5
NEW AUXE 99-36-36□□-□□	99	360	360	2.8
NEW AUXE 99-43-16□□-□□	99	430	160	2.0
NEW AUXE 99-43-20□□-□□	99	430	200	2.2
NEW AUXE 99-43-25□□-□□	99	430	250	2.5
NEW AUXE 99-43-30□□-□□	99	430	300	2.9
NEW AUXE 99-43-36□□-□□	99	430	360	3.3
NEW AUXE 99-43-43□□-□□	99	430	430	3.7
NEW AUXE 99-50-30□□-□□	99	500	300	3.2
NEW AUXE 99-50-36□□-□□	99	500	360	3.7
NEW AUXE 99-50-43□□-□□	99	500	430	4.2
NEW AUXE 99-50-50□□-□□	99	500	500	4.7
NEW AUXE 99-60-36□□-□□	99	600	360	4.2
NEW AUXE 99-60-43□□-□□	99	600	430	4.8

Product no.	H	W	D	Weight (kg)
NEW AUXE115-16-16□□-□□	115	160	160	1.1
NEW AUXE115-20-16□□-□□	115	200	160	1.2
NEW AUXE115-20-20□□-□□	115	200	200	1.4
NEW AUXE115-25-16□□-□□	115	250	160	1.4
NEW AUXE115-25-20□□-□□	115	250	200	1.6
NEW AUXE115-25-25□□-□□	115	250	250	1.8
NEW AUXE115-30-16□□-□□	115	300	160	1.6
NEW AUXE115-30-20□□-□□	115	300	200	1.8
NEW AUXE115-30-25□□-□□	115	300	250	2.1
NEW AUXE115-30-30□□-□□	115	300	300	2.3
NEW AUXE115-36-16□□-□□	115	360	160	1.8
NEW AUXE115-36-20□□-□□	115	360	200	2.0
NEW AUXE115-36-25□□-□□	115	360	250	2.3
NEW AUXE115-36-30□□-□□	115	360	300	2.6
NEW AUXE115-36-36□□-□□	115	360	360	3.0
NEW AUXE115-43-16□□-□□	115	430	160	2.1
NEW AUXE115-43-20□□-□□	115	430	200	2.4
NEW AUXE115-43-25□□-□□	115	430	250	2.7
NEW AUXE115-43-30□□-□□	115	430	300	3.0
NEW AUXE115-43-36□□-□□	115	430	360	3.4
NEW AUXE115-43-43□□-□□	115	430	430	3.9
NEW AUXE115-50-30□□-□□	115	500	300	3.4
NEW AUXE115-50-36□□-□□	115	500	360	3.9
NEW AUXE115-50-43□□-□□	115	500	430	4.4
NEW AUXE115-50-50□□-□□	115	500	500	4.9
NEW AUXE115-60-36□□-□□	115	600	360	4.5
NEW AUXE115-60-43□□-□□	115	600	430	5.0
AUXE133-16-16□□-□□	132.5	160	160	1.3
AUXE133-20-16□□-□□	132.5	200	160	1.5
AUXE133-20-20□□-□□	132.5	200	200	1.7
AUXE133-25-16□□-□□	132.5	250	160	1.7
AUXE133-25-20□□-□□	132.5	250	200	1.9
AUXE133-25-25□□-□□	132.5	250	250	2.2
AUXE133-30-16□□-□□	132.5	300	160	1.9
AUXE133-30-20□□-□□	132.5	300	200	2.1
AUXE133-30-25□□-□□	132.5	300	250	2.4
AUXE133-30-30□□-□□	132.5	300	300	2.7
AUXE133-36-16□□-□□	132.5	360	160	2.2
AUXE133-36-20□□-□□	132.5	360	200	2.4
AUXE133-36-25□□-□□	132.5	360	250	2.7
AUXE133-36-30□□-□□	132.5	360	300	3.1
AUXE133-36-36□□-□□	132.5	360	360	3.4
AUXE133-43-16□□-□□	132.5	430	160	2.5
AUXE133-43-20□□-□□	132.5	430	200	2.8
AUXE133-43-25□□-□□	132.5	430	250	3.1
AUXE133-43-30□□-□□	132.5	430	300	3.5
AUXE133-43-36□□-□□	132.5	430	360	3.9
AUXE133-43-43□□-□□	132.5	430	430	4.4
AUXE133-50-30□□-□□	132.5	500	300	3.9
AUXE133-50-36□□-□□	132.5	500	360	4.4
AUXE133-50-43□□-□□	132.5	500	430	4.9
AUXE133-50-50□□-□□	132.5	500	500	5.5
AUXE133-60-36□□-□□	132.5	600	360	5.0
AUXE133-60-43□□-□□	132.5	600	430	5.7

Product no. / Details

■ Please suffix color code at the end of the product number.

Product no.	H	W	D	Weight (kg)
NEW AUXE149-16-16□□-□□	149	160	160	1.3
NEW AUXE149-20-16□□-□□	149	200	160	1.5
NEW AUXE149-20-20□□-□□	149	200	200	1.7
NEW AUXE149-25-16□□-□□	149	250	160	1.7
NEW AUXE149-25-20□□-□□	149	250	200	2.0
NEW AUXE149-25-25□□-□□	149	250	250	2.2
NEW AUXE149-30-16□□-□□	149	300	160	2.0
NEW AUXE149-30-20□□-□□	149	300	200	2.2
NEW AUXE149-30-25□□-□□	149	300	250	2.5
NEW AUXE149-30-30□□-□□	149	300	300	2.8
NEW AUXE149-36-16□□-□□	149	360	160	2.2
NEW AUXE149-36-20□□-□□	149	360	200	2.5
NEW AUXE149-36-25□□-□□	149	360	250	2.8
NEW AUXE149-36-30□□-□□	149	360	300	3.2
NEW AUXE149-36-36□□-□□	149	360	360	3.6
NEW AUXE149-43-16□□-□□	149	430	160	2.6
NEW AUXE149-43-20□□-□□	149	430	200	2.9
NEW AUXE149-43-25□□-□□	149	430	250	3.3
NEW AUXE149-43-30□□-□□	149	430	300	3.6
NEW AUXE149-43-36□□-□□	149	430	360	4.1
NEW AUXE149-43-43□□-□□	149	430	430	4.6
NEW AUXE149-50-30□□-□□	149	500	300	4.1
NEW AUXE149-50-36□□-□□	149	500	360	4.6
NEW AUXE149-50-43□□-□□	149	500	430	5.1
NEW AUXE149-50-50□□-□□	149	500	500	5.7
NEW AUXE149-60-36□□-□□	149	600	360	5.2
NEW AUXE149-60-43□□-□□	149	600	430	5.9
AUXE177-16-16□□-□□	177	160	160	1.5
AUXE177-20-16□□-□□	177	200	160	1.7
AUXE177-20-20□□-□□	177	200	200	1.9
AUXE177-25-16□□-□□	177	250	160	1.9
AUXE177-25-20□□-□□	177	250	200	2.2
AUXE177-25-25□□-□□	177	250	250	2.5
AUXE177-30-16□□-□□	177	300	160	2.2
AUXE177-30-20□□-□□	177	300	200	2.4
AUXE177-30-25□□-□□	177	300	250	2.8
AUXE177-30-30□□-□□	177	300	300	3.1
AUXE177-36-16□□-□□	177	360	160	2.5
AUXE177-36-20□□-□□	177	360	200	2.8
AUXE177-36-25□□-□□	177	360	250	3.1
AUXE177-36-30□□-□□	177	360	300	3.5
AUXE177-36-36□□-□□	177	360	360	3.9
AUXE177-43-16□□-□□	177	430	160	2.9
AUXE177-43-20□□-□□	177	430	200	3.2
AUXE177-43-25□□-□□	177	430	250	3.6
AUXE177-43-30□□-□□	177	430	300	4.0
AUXE177-43-36□□-□□	177	430	360	4.5
AUXE177-43-43□□-□□	177	430	430	5.0
AUXE177-50-30□□-□□	177	500	300	4.4
AUXE177-50-36□□-□□	177	500	360	5.0
AUXE177-50-43□□-□□	177	500	430	5.6
AUXE177-50-50□□-□□	177	500	500	6.2
AUXE177-60-36□□-□□	177	600	360	5.7
AUXE177-60-43□□-□□	177	600	430	6.4


Product no.	H	W	D	Weight (kg)
NEW AUXE222-16-16□□-□□	221.5	161	161	1.7
NEW AUXE222-20-16□□-□□	221.5	201	161	2.0
NEW AUXE222-20-20□□-□□	221.5	201	201	2.2
NEW AUXE222-25-16□□-□□	221.5	251	161	2.3
NEW AUXE222-25-20□□-□□	221.5	251	201	2.5
NEW AUXE222-25-25□□-□□	221.5	251	251	2.9
NEW AUXE222-30-16□□-□□	221.5	301	161	2.6
NEW AUXE222-30-20□□-□□	221.5	301	201	2.8
NEW AUXE222-30-25□□-□□	221.5	301	251	3.2
NEW AUXE222-30-30□□-□□	221.5	301	301	3.6
NEW AUXE222-36-16□□-□□	221.5	361	161	2.9
NEW AUXE222-36-20□□-□□	221.5	361	201	3.2
NEW AUXE222-36-25□□-□□	221.5	361	251	3.6
NEW AUXE222-36-30□□-□□	221.5	361	301	4.0
NEW AUXE222-36-36□□-□□	221.5	361	361	4.5
NEW AUXE222-43-16□□-□□	221.5	431	161	3.3
NEW AUXE222-43-20□□-□□	221.5	431	201	3.7
NEW AUXE222-43-25□□-□□	221.5	431	251	4.1
NEW AUXE222-43-30□□-□□	221.5	431	301	4.5
NEW AUXE222-43-36□□-□□	221.5	431	361	5.1
NEW AUXE222-43-43□□-□□	221.5	431	431	5.7
NEW AUXE222-50-30□□-□□	221.5	501	301	5.1
NEW AUXE222-50-36□□-□□	221.5	501	361	5.6
NEW AUXE222-50-43□□-□□	221.5	501	431	6.3
NEW AUXE222-50-50□□-□□	221.5	501	501	6.9
NEW AUXE222-60-36□□-□□	221.5	601	361	6.4
NEW AUXE222-60-43□□-□□	221.5	601	431	7.1
NEW AUXE266-16-16□□-□□	265.9	161	161	2.2
NEW AUXE266-20-16□□-□□	265.9	201	161	2.4
NEW AUXE266-20-20□□-□□	265.9	201	201	2.7
NEW AUXE266-25-16□□-□□	265.9	251	161	2.8
NEW AUXE266-25-20□□-□□	265.9	251	201	3.1
NEW AUXE266-25-25□□-□□	265.9	251	251	3.5
NEW AUXE266-30-16□□-□□	265.9	301	161	3.2
NEW AUXE266-30-20□□-□□	265.9	301	201	3.5
NEW AUXE266-30-25□□-□□	265.9	301	251	3.9
NEW AUXE266-30-30□□-□□	265.9	301	301	4.4
NEW AUXE266-36-16□□-□□	265.9	361	161	3.6
NEW AUXE266-36-20□□-□□	265.9	361	201	4.0
NEW AUXE266-36-25□□-□□	265.9	361	251	4.4
NEW AUXE266-36-30□□-□□	265.9	361	301	4.9
NEW AUXE266-36-36□□-□□	265.9	361	361	5.4
NEW AUXE266-43-16□□-□□	265.9	431	161	4.1
NEW AUXE266-43-20□□-□□	265.9	431	201	4.5
NEW AUXE266-43-25□□-□□	265.9	431	251	5.0
NEW AUXE266-43-30□□-□□	265.9	431	301	5.5
NEW AUXE266-43-36□□-□□	265.9	431	361	6.1
NEW AUXE266-43-43□□-□□	265.9	431	431	6.8
NEW AUXE266-50-30□□-□□	265.9	501	301	6.1
NEW AUXE266-50-36□□-□□	265.9	501	361	6.8
NEW AUXE266-50-43□□-□□	265.9	501	431	7.5
NEW AUXE266-50-50□□-□□	265.9	501	501	8.3
NEW AUXE266-60-36□□-□□	265.9	601	361	7.7
NEW AUXE266-60-43□□-□□	265.9	601	431	8.5

AU series ALUMINIUM ENCLOSURE

NEW SIZE




- Elegantly designed aluminium enclosure with front/rear panels.
- A large selection of 430 different sizes to choose from.
- Top/bottom covers and front/rear panels are made from easily customizable sheet aluminium material.
- Versatile aluminium enclosure suitable for use as measuring instrument, controller, industrial embedded computer, power supply, audio amplifier, and more.
- Feet is selectable from adhesive rubber and aluminium types.

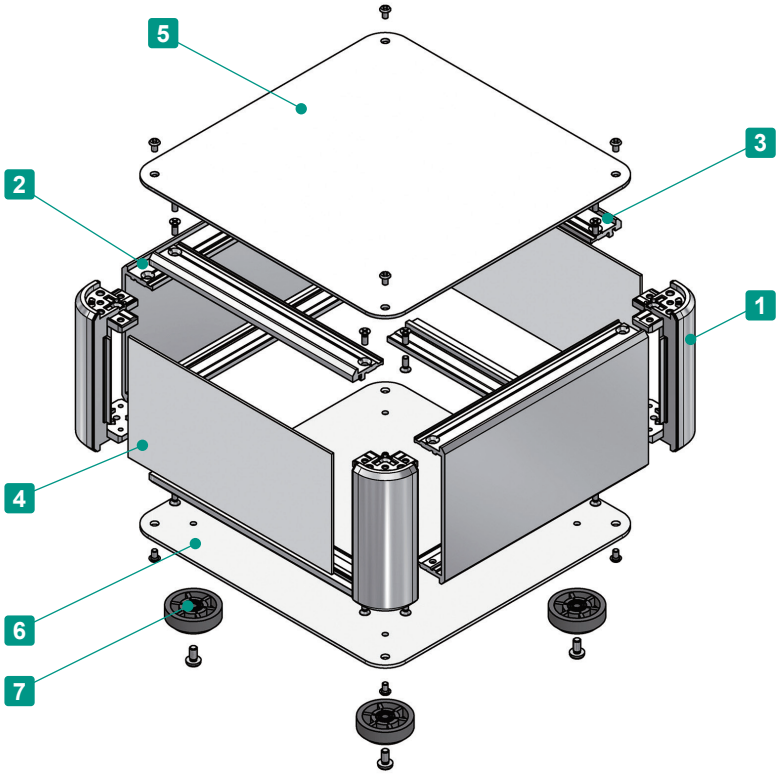

Included screws

- Top / Bottom cover
  M3-5 original trapezoid head (plus / hex) &
  Nickel plated / Black trivalent chromate x 8~16 pcs
- Frame / Panel support frame
  M3-8 flat head & Nickel plated x 16 pcs
- Rubber feet / Aluminium feet
  M4-8 bind head & Black trivalent chromate x 4 pcs

Recommended torque : 0.3 ~ 0.6N • m
* Recommended torque listed is for reference only; actual may differ.
  Assemble after testing torque.

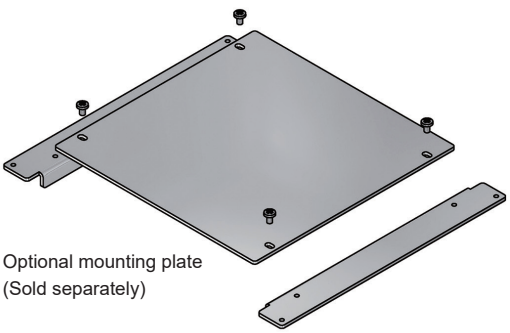

Optional mounting plate
(Sold separately)

Components


No.	Part name	Pcs	Material	Color / Finish
1	Corner block	4	Diecast aluminium ADC12	Silver • Black / Painted (Unfinished inside)
2	Frame	2	Extruded aluminium A6063S-T5	Silver • Black / Anodized with clear coating
3	Panel support frame	4	Extruded aluminium A6063S-T5	Silver • Black / Anodized with clear coating
4	Panel	2	Aluminium A1100P	Silver • Black / Anodized
5	Top cover	1	Aluminium A1100P	Silver • Black / Anodized
6	Bottom cover	1	Aluminium A1100P	Silver • Black / Anodized
7	Rubber feet : Aluminium feet	4	TPE (Elastomer) : Aluminium	Black : Silver • Black / Anodized

To select Feet, Screw, and Color, follow steps 1 ~ 3 to determine product number.


1 Feet

*Color of "Aluminium Feet" will be the same as bottom cover color.

R Rubber (Black)



A Aluminium (Silver / Anodized) (Black / Anodized)




2 Screw

*Color of screw will be the same as top • bottom cover color.

P Plus (Silver / Nickel plated) (Black / Black trivalent chromate)



H Hex (Silver / Nickel plated) (Black / Black trivalent chromate)



Hex wrench included.

3 Color

Please choose from the color combinations listed below.

S S



S B



B S



B B



Product Number

To determine a product number, fill H-W-D dimensions and select Feet, Screw, and Color code in the following blank boxes.


AU ☐ - ☐ - ☐ ☐ ☐ - ☐ ☐

H-W-D dimensions	1 Feet	2 Screw	3 Color
See page 245~248 for dimensions and product no.	R or A	P or H	SS • SB • BS • BB


Numbering example :
If looking at "H88 x W300 x D200mm, Feet type A, Screw type H, Color type BS"

➡ AU 88-30-20 AH-BS

Accessories (Optional parts)



Mounting plate AUC series
See page 293 ~ 294



Corner guard AUCG series
See page 294



Elastomer carrying handle FM200
See website




Tilt leg TLW series
See page 239


AU dimensions

■ DXF/DWG/PDF/STP drawings available on our website.


■ Feet is selectable from rubber and aluminium types.
※Rubber and aluminium feet height are different.

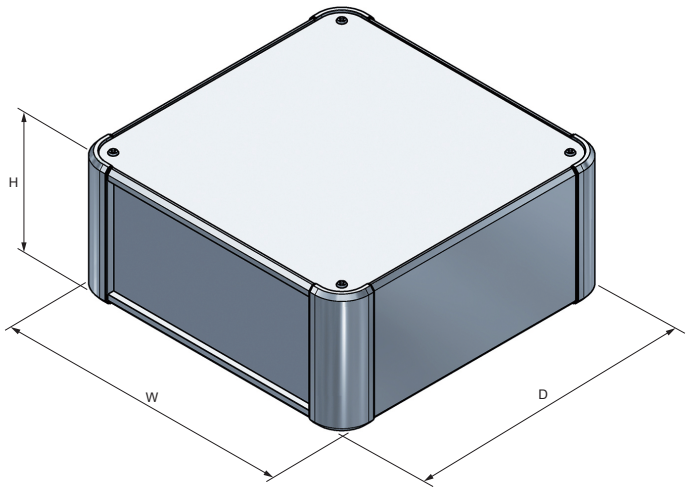

Rubber Feet



Aluminium Feet



Product no. / Details

■ Please suffix color code at the end of the product number.

Product no.	H	W	D	Weight (kg)
AU 44-16-16□□-□□	44	160	160	0.7
AU 44-16-20□□-□□	44	160	200	0.8
AU 44-16-25□□-□□	44	160	250	1.0
AU 44-16-30□□-□□	44	160	300	1.1
AU 44-16-36□□-□□	44	160	360	1.3
AU 44-16-43□□-□□	44	160	430	1.5
AU 44-20-16□□-□□	44	200	160	0.8
AU 44-20-20□□-□□	44	200	200	0.9
AU 44-20-25□□-□□	44	200	250	1.1
AU 44-20-30□□-□□	44	200	300	1.3
AU 44-20-36□□-□□	44	200	360	1.5
AU 44-20-43□□-□□	44	200	430	1.7
AU 44-25-16□□-□□	44	250	160	1.0
AU 44-25-20□□-□□	44	250	200	1.1
AU 44-25-25□□-□□	44	250	250	1.3
AU 44-25-30□□-□□	44	250	300	1.5
AU 44-25-36□□-□□	44	250	360	1.7
AU 44-25-43□□-□□	44	250	430	2.0
AU 44-30-16□□-□□	44	300	160	1.1
AU 44-30-20□□-□□	44	300	200	1.3
AU 44-30-25□□-□□	44	300	250	1.5
AU 44-30-30□□-□□	44	300	300	1.7
AU 44-30-36□□-□□	44	300	360	2.0
AU 44-30-43□□-□□	44	300	430	2.3
AU 44-30-50□□-□□	44	300	500	2.6
AU 44-36-16□□-□□	44	360	160	1.3
AU 44-36-20□□-□□	44	360	200	1.5
AU 44-36-25□□-□□	44	360	250	1.7
AU 44-36-30□□-□□	44	360	300	2.0
AU 44-36-36□□-□□	44	360	360	2.2
AU 44-36-43□□-□□	44	360	430	2.6
AU 44-36-50□□-□□	44	360	500	3.0
AU 44-43-16□□-□□	44	430	160	1.5
AU 44-43-20□□-□□	44	430	200	1.7
AU 44-43-25□□-□□	44	430	250	2.0
AU 44-43-30□□-□□	44	430	300	2.3
AU 44-43-36□□-□□	44	430	360	2.6
AU 44-43-43□□-□□	44	430	430	3.0
AU 44-43-50□□-□□	44	430	500	3.4
AU 44-50-30□□-□□	44	500	300	2.6
AU 44-50-36□□-□□	44	500	360	3.0
AU 44-50-43□□-□□	44	500	430	3.4
AU 44-50-50□□-□□	44	500	500	3.9

Product no.	H	W	D	Weight (kg)
AU 66-16-16□□-□□	66	160	160	0.9
AU 66-16-20□□-□□	66	160	200	1.0
AU 66-16-25□□-□□	66	160	250	1.2
AU 66-16-30□□-□□	66	160	300	1.3
AU 66-16-36□□-□□	66	160	360	1.5
AU 66-16-43□□-□□	66	160	430	1.7
AU 66-20-16□□-□□	66	200	160	1.0
AU 66-20-20□□-□□	66	200	200	1.1
AU 66-20-25□□-□□	66	200	250	1.3
AU 66-20-30□□-□□	66	200	300	1.5
AU 66-20-36□□-□□	66	200	360	1.7
AU 66-20-43□□-□□	66	200	430	2.0
AU 66-25-16□□-□□	66	250	160	1.1
AU 66-25-20□□-□□	66	250	200	1.3
AU 66-25-25□□-□□	66	250	250	1.5
AU 66-25-30□□-□□	66	250	300	1.7
AU 66-25-36□□-□□	66	250	360	2.0
AU 66-25-43□□-□□	66	250	430	2.3
AU 66-30-16□□-□□	66	300	160	1.3
AU 66-30-20□□-□□	66	300	200	1.5
AU 66-30-25□□-□□	66	300	250	1.7
AU 66-30-30□□-□□	66	300	300	1.9
AU 66-30-36□□-□□	66	300	360	2.2
AU 66-30-43□□-□□	66	300	430	2.6
AU 66-30-50□□-□□	66	300	500	2.9
AU 66-36-16□□-□□	66	360	160	1.5
AU 66-36-20□□-□□	66	360	200	1.7
AU 66-36-25□□-□□	66	360	250	1.9
AU 66-36-30□□-□□	66	360	300	2.2
AU 66-36-36□□-□□	66	360	360	2.5
AU 66-36-43□□-□□	66	360	430	2.9
AU 66-36-50□□-□□	66	360	500	3.3
AU 66-43-16□□-□□	66	430	160	1.7
AU 66-43-20□□-□□	66	430	200	1.9
AU 66-43-25□□-□□	66	430	250	2.2
AU 66-43-30□□-□□	66	430	300	2.5
AU 66-43-36□□-□□	66	430	360	2.9
AU 66-43-43□□-□□	66	430	430	3.3
AU 66-43-50□□-□□	66	430	500	3.7
AU 66-50-30□□-□□	66	500	300	2.8
AU 66-50-36□□-□□	66	500	360	3.3
AU 66-50-43□□-□□	66	500	430	3.7
AU 66-50-50□□-□□	66	500	500	4.2

Product no. / Details

■ Please suffix color code at the end of the product number.

Product no.	H	W	D	Weight (kg)
AU 88-16-16□□-□□	88	160	160	0.9
AU 88-16-20□□-□□	88	160	200	1.1
AU 88-16-25□□-□□	88	160	250	1.3
AU 88-16-30□□-□□	88	160	300	1.4
AU 88-16-36□□-□□	88	160	360	1.7
AU 88-16-43□□-□□	88	160	430	1.9
AU 88-20-16□□-□□	88	200	160	1.1
AU 88-20-20□□-□□	88	200	200	1.2
AU 88-20-25□□-□□	88	200	250	1.4
AU 88-20-30□□-□□	88	200	300	1.6
AU 88-20-36□□-□□	88	200	360	1.8
AU 88-20-43□□-□□	88	200	430	2.1
AU 88-25-16□□-□□	88	250	160	1.2
AU 88-25-20□□-□□	88	250	200	1.4
AU 88-25-25□□-□□	88	250	250	1.6
AU 88-25-30□□-□□	88	250	300	1.8
AU 88-25-36□□-□□	88	250	360	2.1
AU 88-25-43□□-□□	88	250	430	2.4
AU 88-30-16□□-□□	88	300	160	1.4
AU 88-30-20□□-□□	88	300	200	1.6
AU 88-30-25□□-□□	88	300	250	1.8
AU 88-30-30□□-□□	88	300	300	2.1
AU 88-30-36□□-□□	88	300	360	2.4
AU 88-30-43□□-□□	88	300	430	2.7
AU 88-30-50□□-□□	88	300	500	3.1
AU 88-36-16□□-□□	88	360	160	1.6
AU 88-36-20□□-□□	88	360	200	1.8
AU 88-36-25□□-□□	88	360	250	2.1
AU 88-36-30□□-□□	88	360	300	2.3
AU 88-36-36□□-□□	88	360	360	2.7
AU 88-36-43□□-□□	88	360	430	3.1
AU 88-36-50□□-□□	88	360	500	3.5
AU 88-43-16□□-□□	88	430	160	1.8
AU 88-43-20□□-□□	88	430	200	2.1
AU 88-43-25□□-□□	88	430	250	2.4
AU 88-43-30□□-□□	88	430	300	2.7
AU 88-43-36□□-□□	88	430	360	3.1
AU 88-43-43□□-□□	88	430	430	3.5
AU 88-43-50□□-□□	88	430	500	4.0
AU 88-50-30□□-□□	88	500	300	3.0
AU 88-50-36□□-□□	88	500	360	3.4
AU 88-50-43□□-□□	88	500	430	3.9
AU 88-50-50□□-□□	88	500	500	4.4
NEW AU 99-16-16□□-□□	99	160	160	1.0
NEW AU 99-16-20□□-□□	99	160	200	1.1
NEW AU 99-16-25□□-□□	99	160	250	1.3
NEW AU 99-16-30□□-□□	99	160	300	1.4
NEW AU 99-16-36□□-□□	99	160	360	1.7
NEW AU 99-16-43□□-□□	99	160	430	1.9
NEW AU 99-20-16□□-□□	99	200	160	1.1
NEW AU 99-20-20□□-□□	99	200	200	1.2
NEW AU 99-20-25□□-□□	99	200	250	1.4
NEW AU 99-20-30□□-□□	99	200	300	1.6
NEW AU 99-20-36□□-□□	99	200	360	1.9
NEW AU 99-20-43□□-□□	99	200	430	2.2
NEW AU 99-25-16□□-□□	99	250	160	1.2
NEW AU 99-25-20□□-□□	99	250	200	1.4
NEW AU 99-25-25□□-□□	99	250	250	1.6
NEW AU 99-25-30□□-□□	99	250	300	1.9
NEW AU 99-25-36□□-□□	99	250	360	2.1
NEW AU 99-25-43□□-□□	99	250	430	2.5
NEW AU 99-30-16□□-□□	99	300	160	1.4
NEW AU 99-30-20□□-□□	99	300	200	1.6
NEW AU 99-30-25□□-□□	99	300	250	1.9
NEW AU 99-30-30□□-□□	99	300	300	2.1

Product no.	H	W	D	Weight (kg)
NEW AU 99-30-36□□-□□	99	300	360	2.4
NEW AU 99-30-43□□-□□	99	300	430	2.8
NEW AU 99-30-50□□-□□	99	300	500	3.1
NEW AU 99-36-16□□-□□	99	360	160	1.6
NEW AU 99-36-20□□-□□	99	360	200	1.8
NEW AU 99-36-25□□-□□	99	360	250	2.1
NEW AU 99-36-30□□-□□	99	360	300	2.4
NEW AU 99-36-36□□-□□	99	360	360	2.7
NEW AU 99-36-43□□-□□	99	360	430	3.2
NEW AU 99-36-50□□-□□	99	360	500	3.6
NEW AU 99-43-16□□-□□	99	430	160	1.8
NEW AU 99-43-20□□-□□	99	430	200	2.1
NEW AU 99-43-25□□-□□	99	430	250	2.4
NEW AU 99-43-30□□-□□	99	430	300	2.7
NEW AU 99-43-36□□-□□	99	430	360	3.1
NEW AU 99-43-43□□-□□	99	430	430	3.6
NEW AU 99-43-50□□-□□	99	430	500	4.0
NEW AU 99-50-30□□-□□	99	500	300	3.1
NEW AU 99-50-36□□-□□	99	500	360	3.5
NEW AU 99-50-43□□-□□	99	500	430	4.0
NEW AU 99-50-50□□-□□	99	500	500	4.5
NEW AU115-16-16□□-□□	115	160	160	1.0
NEW AU115-16-20□□-□□	115	160	200	1.2
NEW AU115-16-25□□-□□	115	160	250	1.4
NEW AU115-16-30□□-□□	115	160	300	1.5
NEW AU115-16-36□□-□□	115	160	360	1.8
NEW AU115-16-43□□-□□	115	160	430	2.1
NEW AU115-20-16□□-□□	115	200	160	1.2
NEW AU115-20-20□□-□□	115	200	200	1.3
NEW AU115-20-25□□-□□	115	200	250	1.5
NEW AU115-20-30□□-□□	115	200	300	1.7
NEW AU115-20-36□□-□□	115	200	360	2.0
NEW AU115-20-43□□-□□	115	200	430	2.3
NEW AU115-25-16□□-□□	115	250	160	1.3
NEW AU115-25-20□□-□□	115	250	200	1.5
NEW AU115-25-25□□-□□	115	250	250	1.7
NEW AU115-25-30□□-□□	115	250	300	2.0
NEW AU115-25-36□□-□□	115	250	360	2.3
NEW AU115-25-43□□-□□	115	250	430	2.6
NEW AU115-30-16□□-□□	115	300	160	1.5
NEW AU115-30-20□□-□□	115	300	200	1.7
NEW AU115-30-25□□-□□	115	300	250	2.0
NEW AU115-30-30□□-□□	115	300	300	2.2
NEW AU115-30-36□□-□□	115	300	360	2.5
NEW AU115-30-43□□-□□	115	300	430	2.9
NEW AU115-30-50□□-□□	115	300	500	3.3
NEW AU115-36-16□□-□□	115	360	160	1.7
NEW AU115-36-20□□-□□	115	360	200	1.9
NEW AU115-36-25□□-□□	115	360	250	2.2
NEW AU115-36-30□□-□□	115	360	300	2.5
NEW AU115-36-36□□-□□	115	360	360	2.9
NEW AU115-36-43□□-□□	115	360	430	3.3
NEW AU115-36-50□□-□□	115	360	500	3.7
NEW AU115-43-16□□-□□	115	430	160	2.0
NEW AU115-43-20□□-□□	115	430	200	2.2
NEW AU115-43-25□□-□□	115	430	250	2.6
NEW AU115-43-30□□-□□	115	430	300	2.9
NEW AU115-43-36□□-□□	115	430	360	3.3
NEW AU115-43-43□□-□□	115	430	430	3.8
NEW AU115-43-50□□-□□	115	430	500	4.2
NEW AU115-50-30□□-□□	115	500	300	3.2
NEW AU115-50-36□□-□□	115	500	360	3.7
NEW AU115-50-43□□-□□	115	500	430	4.2
NEW AU115-50-50□□-□□	115	500	500	4.7

Product no. / Details

■ Please suffix color code at the end of the product number.

Product no.	H	W	D	Weight (kg)
AU133-16-16□□-□□	132.5	160	160	1.2
AU133-16-20□□-□□	132.5	160	200	1.4
AU133-16-25□□-□□	132.5	160	250	1.6
AU133-16-30□□-□□	132.5	160	300	1.8
AU133-16-36□□-□□	132.5	160	360	2.1
AU133-16-43□□-□□	132.5	160	430	2.4
AU133-20-16□□-□□	132.5	200	160	1.3
AU133-20-20□□-□□	132.5	200	200	1.5
AU133-20-25□□-□□	132.5	200	250	1.7
AU133-20-30□□-□□	132.5	200	300	2.0
AU133-20-36□□-□□	132.5	200	360	2.3
AU133-20-43□□-□□	132.5	200	430	2.6
AU133-25-16□□-□□	132.5	250	160	1.5
AU133-25-20□□-□□	132.5	250	200	1.7
AU133-25-25□□-□□	132.5	250	250	2.0
AU133-25-30□□-□□	132.5	250	300	2.2
AU133-25-36□□-□□	132.5	250	360	2.6
AU133-25-43□□-□□	132.5	250	430	3.0
AU133-30-16□□-□□	132.5	300	160	1.7
AU133-30-20□□-□□	132.5	300	200	1.9
AU133-30-25□□-□□	132.5	300	250	2.2
AU133-30-30□□-□□	132.5	300	300	2.5
AU133-30-36□□-□□	132.5	300	360	2.8
AU133-30-43□□-□□	132.5	300	430	3.3
AU133-30-50□□-□□	132.5	300	500	3.7
AU133-36-16□□-□□	132.5	360	160	1.9
AU133-36-20□□-□□	132.5	360	200	2.1
AU133-36-25□□-□□	132.5	360	250	2.5
AU133-36-30□□-□□	132.5	360	300	2.8
AU133-36-36□□-□□	132.5	360	360	3.2
AU133-36-43□□-□□	132.5	360	430	3.7
AU133-36-50□□-□□	132.5	360	500	4.1
AU133-43-16□□-□□	132.5	430	160	2.2
AU133-43-20□□-□□	132.5	430	200	2.4
AU133-43-25□□-□□	132.5	430	250	2.8
AU133-43-30□□-□□	132.5	430	300	3.2
AU133-43-36□□-□□	132.5	430	360	3.6
AU133-43-43□□-□□	132.5	430	430	4.1
AU133-43-50□□-□□	132.5	430	500	4.6
AU133-50-30□□-□□	132.5	500	300	3.5
AU133-50-36□□-□□	132.5	500	360	4.0
AU133-50-43□□-□□	132.5	500	430	4.6
AU133-50-50□□-□□	132.5	500	500	5.1
NEW AU149-16-16□□-□□	149	160	160	1.2
NEW AU149-16-20□□-□□	149	160	200	1.4
NEW AU149-16-25□□-□□	149	160	250	1.6
NEW AU149-16-30□□-□□	149	160	300	1.9
NEW AU149-16-36□□-□□	149	160	360	2.1
NEW AU149-16-43□□-□□	149	160	430	2.5
NEW AU149-20-16□□-□□	149	200	160	1.4
NEW AU149-20-20□□-□□	149	200	200	1.6
NEW AU149-20-25□□-□□	149	200	250	1.8
NEW AU149-20-30□□-□□	149	200	300	2.1
NEW AU149-20-36□□-□□	149	200	360	2.4
NEW AU149-20-43□□-□□	149	200	430	2.7
NEW AU149-25-16□□-□□	149	250	160	1.5
NEW AU149-25-20□□-□□	149	250	200	1.8
NEW AU149-25-25□□-□□	149	250	250	2.0
NEW AU149-25-30□□-□□	149	250	300	2.3
NEW AU149-25-36□□-□□	149	250	360	2.7
NEW AU149-25-43□□-□□	149	250	430	3.1
NEW AU149-30-16□□-□□	149	300	160	1.7
NEW AU149-30-20□□-□□	149	300	200	2.0
NEW AU149-30-25□□-□□	149	300	250	2.3
NEW AU149-30-30□□-□□	149	300	300	2.6

Product no.	H	W	D	Weight (kg)
NEW AU149-30-36□□-□□	149	300	360	2.9
NEW AU149-30-43□□-□□	149	300	430	3.4
NEW AU149-30-50□□-□□	149	300	500	3.8
NEW AU149-36-16□□-□□	149	360	160	1.9
NEW AU149-36-20□□-□□	149	360	200	2.2
NEW AU149-36-25□□-□□	149	360	250	2.5
NEW AU149-36-30□□-□□	149	360	300	2.9
NEW AU149-36-36□□-□□	149	360	360	3.3
NEW AU149-36-43□□-□□	149	360	430	3.8
NEW AU149-36-50□□-□□	149	360	500	4.3
NEW AU149-43-16□□-□□	149	430	160	2.2
NEW AU149-43-20□□-□□	149	430	200	2.5
NEW AU149-43-25□□-□□	149	430	250	2.9
NEW AU149-43-30□□-□□	149	430	300	3.3
NEW AU149-43-36□□-□□	149	430	360	3.7
NEW AU149-43-43□□-□□	149	430	430	4.2
NEW AU149-43-50□□-□□	149	430	500	4.8
NEW AU149-50-30□□-□□	149	500	300	3.6
NEW AU149-50-36□□-□□	149	500	360	4.1
NEW AU149-50-43□□-□□	149	500	430	4.7
NEW AU149-50-50□□-□□	149	500	500	5.3
AU177-16-16□□-□□	177	160	160	1.4
AU177-16-20□□-□□	177	160	200	1.6
AU177-16-25□□-□□	177	160	250	1.8
AU177-16-30□□-□□	177	160	300	2.1
AU177-16-36□□-□□	177	160	360	2.4
AU177-16-43□□-□□	177	160	430	2.7
AU177-20-16□□-□□	177	200	160	1.5
AU177-20-20□□-□□	177	200	200	1.7
AU177-20-25□□-□□	177	200	250	2.0
AU177-20-30□□-□□	177	200	300	2.3
AU177-20-36□□-□□	177	200	360	2.6
AU177-20-43□□-□□	177	200	430	3.0
AU177-25-16□□-□□	177	250	160	1.7
AU177-25-20□□-□□	177	250	200	1.9
AU177-25-25□□-□□	177	250	250	2.2
AU177-25-30□□-□□	177	250	300	2.5
AU177-25-36□□-□□	177	250	360	2.9
AU177-25-43□□-□□	177	250	430	3.3
AU177-30-16□□-□□	177	300	160	1.9
AU177-30-20□□-□□	177	300	200	2.2
AU177-30-25□□-□□	177	300	250	2.5
AU177-30-30□□-□□	177	300	300	2.8
AU177-30-36□□-□□	177	300	360	3.2
AU177-30-43□□-□□	177	300	430	3.7
AU177-30-50□□-□□	177	300	500	4.1
AU177-36-16□□-□□	177	360	160	2.1
AU177-36-20□□-□□	177	360	200	2.4
AU177-36-25□□-□□	177	360	250	2.8
AU177-36-30□□-□□	177	360	300	3.1
AU177-36-36□□-□□	177	360	360	3.6
AU177-36-43□□-□□	177	360	430	4.1
AU177-36-50□□-□□	177	360	500	4.6
AU177-43-16□□-□□	177	430	160	2.4
AU177-43-20□□-□□	177	430	200	2.7
AU177-43-25□□-□□	177	430	250	3.1
AU177-43-30□□-□□	177	430	300	3.5
AU177-43-36□□-□□	177	430	360	4.0
AU177-43-43□□-□□	177	430	430	4.6
AU177-43-50□□-□□	177	430	500	5.1
AU177-50-30□□-□□	177	500	300	3.9
AU177-50-36□□-□□	177	500	360	4.4
AU177-50-43□□-□□	177	500	430	5.0
AU177-50-50□□-□□	177	500	500	5.6


Product no. / Details


■ Please suffix color code at the end of the product number.

Product no.	H	W	D	Weight (kg)
NEW AU222-16-16□□-□□	221.5	161	161	1.6
NEW AU222-16-20□□-□□	221.5	161	201	1.8
NEW AU222-16-25□□-□□	221.5	161	251	2.1
NEW AU222-16-30□□-□□	221.5	161	301	2.4
NEW AU222-16-36□□-□□	221.5	161	361	2.7
NEW AU222-16-43□□-□□	221.5	161	431	3.2
NEW AU222-20-16□□-□□	221.5	201	161	1.8
NEW AU222-20-20□□-□□	221.5	201	201	2.0
NEW AU222-20-25□□-□□	221.5	201	251	2.3
NEW AU222-20-30□□-□□	221.5	201	301	2.6
NEW AU222-20-36□□-□□	221.5	201	361	3.0
NEW AU222-20-43□□-□□	221.5	201	431	3.4
NEW AU222-25-16□□-□□	221.5	251	161	2.0
NEW AU222-25-20□□-□□	221.5	251	201	2.2
NEW AU222-25-25□□-□□	221.5	251	251	2.6
NEW AU222-25-30□□-□□	221.5	251	301	2.9
NEW AU222-25-36□□-□□	221.5	251	361	3.3
NEW AU222-25-43□□-□□	221.5	251	431	3.8
NEW AU222-30-16□□-□□	221.5	301	161	2.2
NEW AU222-30-20□□-□□	221.5	301	201	2.5
NEW AU222-30-25□□-□□	221.5	301	251	2.8
NEW AU222-30-30□□-□□	221.5	301	301	3.2
NEW AU222-30-36□□-□□	221.5	301	361	3.6
NEW AU222-30-43□□-□□	221.5	301	431	4.2
NEW AU222-30-50□□-□□	221.5	301	501	4.7
NEW AU222-36-16□□-□□	221.5	361	161	2.4
NEW AU222-36-20□□-□□	221.5	361	201	2.7
NEW AU222-36-25□□-□□	221.5	361	251	3.1
NEW AU222-36-30□□-□□	221.5	361	301	3.5
NEW AU222-36-36□□-□□	221.5	361	361	4.0
NEW AU222-36-43□□-□□	221.5	361	431	4.6
NEW AU222-36-50□□-□□	221.5	361	501	5.1
NEW AU222-43-16□□-□□	221.5	431	161	2.7
NEW AU222-43-20□□-□□	221.5	431	201	3.1
NEW AU222-43-25□□-□□	221.5	431	251	3.5
NEW AU222-43-30□□-□□	221.5	431	301	4.0
NEW AU222-43-36□□-□□	221.5	431	361	4.5
NEW AU222-43-43□□-□□	221.5	431	431	5.1
NEW AU222-43-50□□-□□	221.5	431	501	5.7
NEW AU222-50-30□□-□□	221.5	501	301	4.4
NEW AU222-50-36□□-□□	221.5	501	361	4.9
NEW AU222-50-43□□-□□	221.5	501	431	5.6
NEW AU222-50-50□□-□□	221.5	501	501	6.2

Product no.	H	W	D	Weight (kg)
NEW AU266-16-16□□-□□	265.9	161	161	1.9
NEW AU266-16-20□□-□□	265.9	161	201	2.2
NEW AU266-16-25□□-□□	265.9	161	251	2.5
NEW AU266-16-30□□-□□	265.9	161	301	2.9
NEW AU266-16-36□□-□□	265.9	161	361	3.3
NEW AU266-16-43□□-□□	265.9	161	431	3.8
NEW AU266-20-16□□-□□	265.9	201	161	2.1
NEW AU266-20-20□□-□□	265.9	201	201	2.4
NEW AU266-20-25□□-□□	265.9	201	251	2.7
NEW AU266-20-30□□-□□	265.9	201	301	3.1
NEW AU266-20-36□□-□□	265.9	201	361	3.6
NEW AU266-20-43□□-□□	265.9	201	431	4.1
NEW AU266-25-16□□-□□	265.9	251	161	2.3
NEW AU266-25-20□□-□□	265.9	251	201	2.6
NEW AU266-25-25□□-□□	265.9	251	251	3.0
NEW AU266-25-30□□-□□	265.9	251	301	3.4
NEW AU266-25-36□□-□□	265.9	251	361	3.9
NEW AU266-25-43□□-□□	265.9	251	431	4.5
NEW AU266-30-16□□-□□	265.9	301	161	2.5
NEW AU266-30-20□□-□□	265.9	301	201	2.9
NEW AU266-30-25□□-□□	265.9	301	251	3.3
NEW AU266-30-30□□-□□	265.9	301	301	3.7
NEW AU266-30-36□□-□□	265.9	301	361	4.2
NEW AU266-30-43□□-□□	265.9	301	431	4.9
NEW AU266-30-50□□-□□	265.9	301	501	5.5
NEW AU266-36-16□□-□□	265.9	361	161	2.8
NEW AU266-36-20□□-□□	265.9	361	201	3.2
NEW AU266-36-25□□-□□	265.9	361	251	3.6
NEW AU266-36-30□□-□□	265.9	361	301	4.1
NEW AU266-36-36□□-□□	265.9	361	361	4.6
NEW AU266-36-43□□-□□	265.9	361	431	5.3
NEW AU266-36-50□□-□□	265.9	361	501	6.0
NEW AU266-43-16□□-□□	265.9	431	161	3.1
NEW AU266-43-20□□-□□	265.9	431	201	3.5
NEW AU266-43-25□□-□□	265.9	431	251	4.0
NEW AU266-43-30□□-□□	265.9	431	301	4.5
NEW AU266-43-36□□-□□	265.9	431	361	5.1
NEW AU266-43-43□□-□□	265.9	431	431	5.8
NEW AU266-43-50□□-□□	265.9	431	501	6.6
NEW AU266-50-30□□-□□	265.9	501	301	5.0
NEW AU266-50-36□□-□□	265.9	501	361	5.6
NEW AU266-50-43□□-□□	265.9	501	431	6.4
NEW AU266-50-50□□-□□	265.9	501	501	7.1

AUC series MOUNTING PLATE for AU□ series

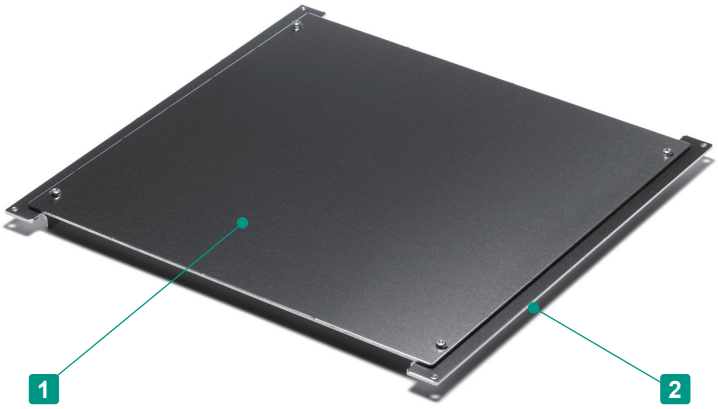

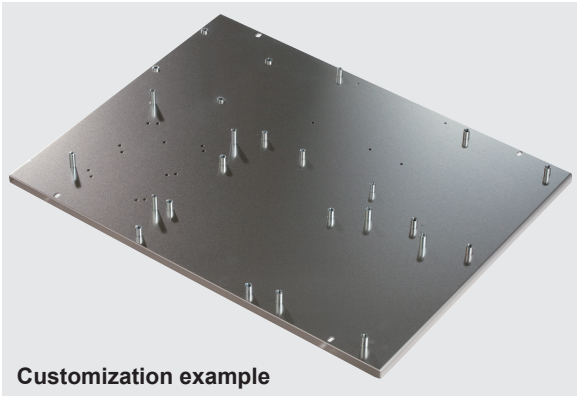

Customization example

■ See page CUSTOM-9 ~ CUSTOM-11 and our website for further details.

■ Mounting plate for AUR, AUPR, AUPRE, AUXR, AUXRE, AUGH, AUG, AUGE, AU, AUP, AUPE, AUX, and AUXE series.

Components


No.	Part name	Pcs	Material	Finish
1	Mounting plate	1	Aluminium A1050P t=2.0	Unfinished
2	L-bracket	2	Aluminium A1050P t=2.0	Unfinished

Included screw :
- Corner block M3 flat head : Nickel plated x 4
- Mounting plate M3-5 pan head : Trivalent chromate x 4


AUC dimensions

■ DXF/DWG/PDF/STP drawings available on our website.

Non-reinforced (N) type

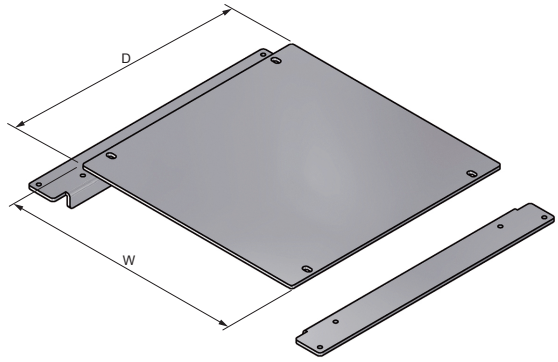

Reinforced (Y) type

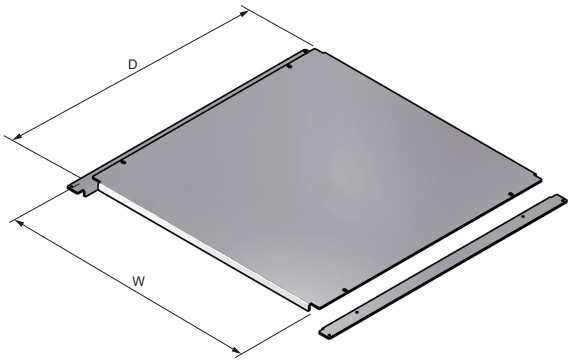

Product no. / Details

Product no.	W	D	Enclosure W x D	Reinforcement	Weight (g)
AUC16-16	108	108	160×160	N	102
AUC16-20	108	148	160×200	N	138
AUC16-25	108	198	160×250	N	181
AUC16-30	108	248	160×300	N	226
AUC16-36	108	308	160×360	N	279
AUC16-43	108	378	160×430	N	340
AUC20-16	148	108	200×160	N	126
AUC20-20	148	148	200×200	N	170
AUC20-25	148	198	200×250	N	224
AUC20-30	148	248	200×300	N	279
AUC20-36	148	308	200×360	N	345
AUC20-43	148	378	200×430	N	422
AUC25-16	198	108	250×160	N	155
AUC25-20	198	148	250×200	N	210
AUC25-25	198	198	250×250	N	278
AUC25-30	198	248	250×300	N	346
AUC25-36	198	308	250×360	N	428
AUC25-43	198	378	250×430	N	524
AUC30-16	248	108	300×160	N	184
AUC30-20	248	148	300×200	N	249
AUC30-25	248	198	300×250	N	331
AUC30-30	248	248	300×300	N	413
AUC30-36	248	308	300×360	N	512

Product no.	W	D	Enclosure W x D	Reinforcement	Weight (g)
AUC30-43	248	378	300×430	N	626
AUC30-50	248	448	300×500	N	741
AUC36-16	308	108	360×160	N	219
AUC36-20	308	148	360×200	N	297
AUC36-25	308	198	360×250	N	395
AUC36-30	308	248	360×300	N	494
AUC36-36	308	308	360×360	N	581
AUC36-43	308	378	360×430	N	749
AUC36-50	308	448	360×500	N	886
AUC43-16	378	108	430×160	Y	287
AUC43-20	378	148	430×200	Y	353
AUC43-25	378	198	430×250	Y	470
AUC43-30	378	248	430×300	Y	587
AUC43-36	378	308	430×360	Y	728
AUC43-43	378	378	430×430	Y	918
AUC43-50	378	448	430×500	Y	1,082
AUC50-30	448	248	500×300	Y	681
AUC50-36	448	308	500×360	Y	814
AUC50-43	448	378	500×430	Y	1,061
AUC50-50	448	448	500×500	Y	1,257
AUC60-36	548	308	600×360	Y	1,021
AUC60-43	548	378	600×430	Y	1,279

How to install AUC mounting plate

1. Install L-bracket onto countersunk screw hole on corner block.




2. Install mounting plate onto L-bracket with screws.



AUCG series CORNER GUARD for AU□ series



AUCG dimensions

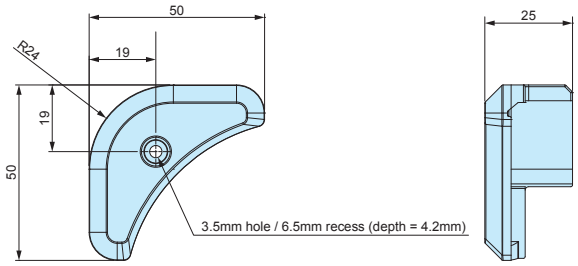

■ DXF/DWG/PDF drawings available on our website.

■ Spare corner guard for AUGH, AUG and AUGE series. AUCG corner guard can also be installed on AU, AUP, AUPE, AUX, and AUXE series enclosures.

■ 4 colors available: Black, Gray, Navy, and Red. Retailed as a pack of 8pcs.

Product no. / Details

Product no.				Weight (g)	Pack of
● Black	● Gray	● Navy	● Red		
AUCG-1B	AUCG-1G	AUCG-1N	AUCG-1R	9.5	8


AEG-1000 EMC SHIELDING GASKET for AU□ series

EMC Shielding



■ Spare EMC shielding gasket for AUPRE, AUXRE, AUGE, AUPE, and AUXE series enclosures. Installation on AUP and ARPR series is possible to allow it to be EMC shielded.

Cross section view

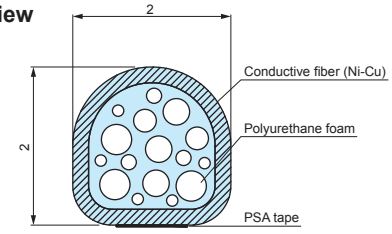

Product no. / Details

Product no.	Material	Color	Sales unit
AEG-1000	Conductive fiber UL94V-0	Metallic gray	1000mm x 1 pc

MAR series WALL MOUNT SUPPORT ARM







- Wall mount support arm move easily to the preferred positions.
- Suitable for command panel on machinery and touch panel controller. Easy installation onto the wall as well.
- Hole pitch on the monitor bracket is compatible with VESA mount standards. Possible to mount PC display without modification.

MAR specifications

MAR-312W

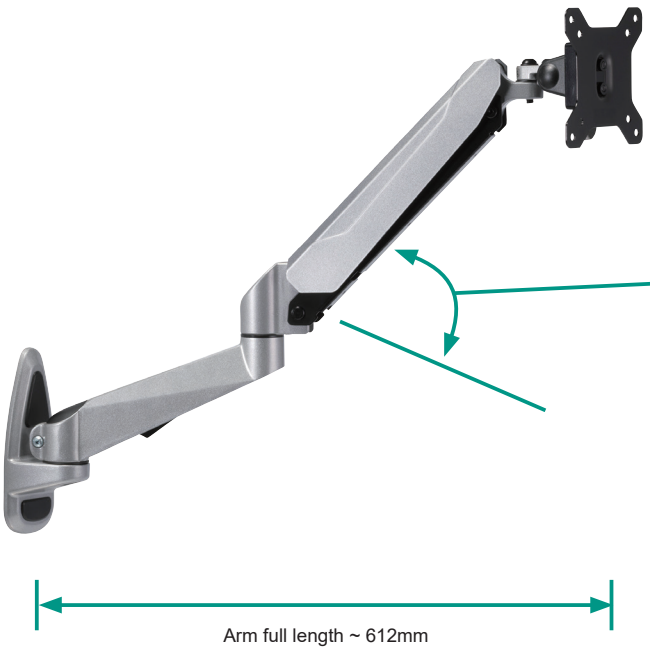





Adjustable bolt for up/down direction on arm is firmly set initially.
Adjust the movement according to the installed device.

Arm can move in up/down direction.

Pan-Tilt bracket dimensions




Wall mounting bracket dimensions




Max load : 6.5kg (including product weight, adjustable bolt firmly locked)
Material : Steel • Plastic • Aluminium diecast
*Wall mounting screws included.

MAR-111W

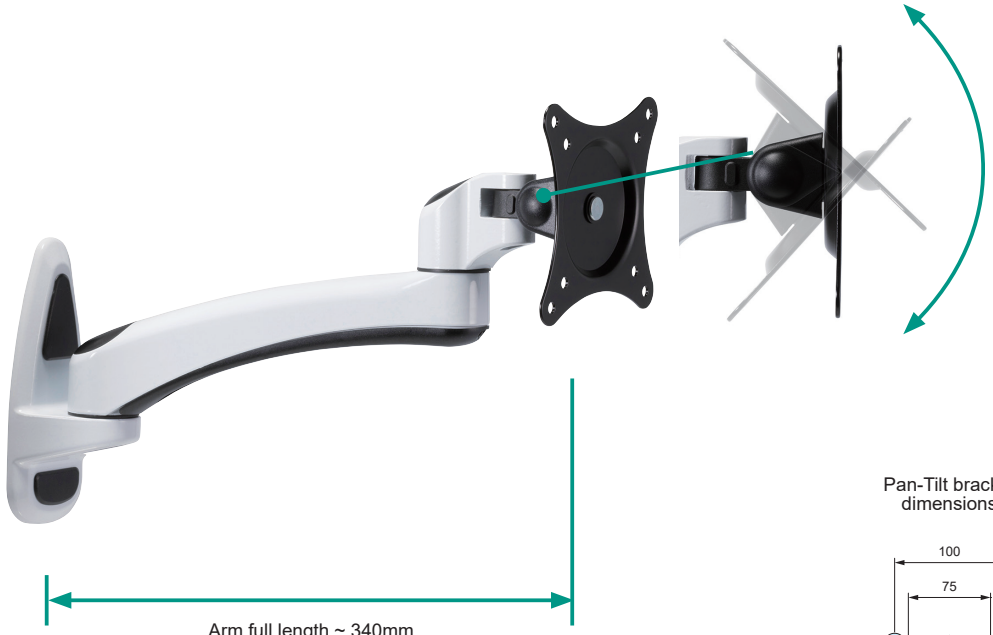


Pan-Tilt bracket angle can be adjusted by loosening the bolt after replacing the cover.

Pan-Tilt bracket dimensions



Wall mounting bracket dimensions




Max load : 8kg (including product weight)
Material : Steel • Plastic • Aluminium diecast
*Wall mounting screws included.

MAR-110W




*Pan-Tilt bracket does not move in up/down direction.

Pan-Tilt bracket dimensions

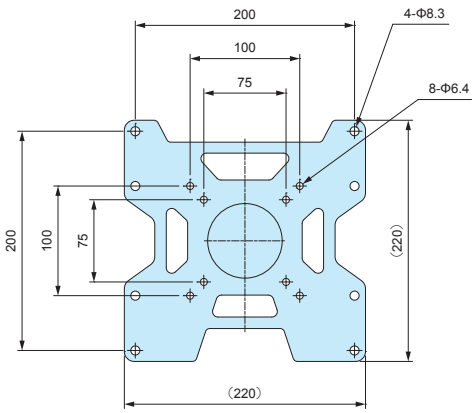

Wall mounting bracket dimensions



Max load : 8kg (including product weight)
Material : Steel • Plastic • Aluminium diecast
*Wall mounting screws included.

Product no. / Details


Product no.	Arm full length	Arm color	Weight (kg)
MAR-312W	~ 612mm	Metallic gray	2.2
MAR-111W	~ 340mm	White / Black	1.0
MAR-110W	~ 143mm	White / Black	1.0

FM200 series ELASTOMER CARRYING HANDLE

■ DXF/DWG/PDF/STP drawings available on our website.



■ Comfortable and easy to grip elastomer handle.

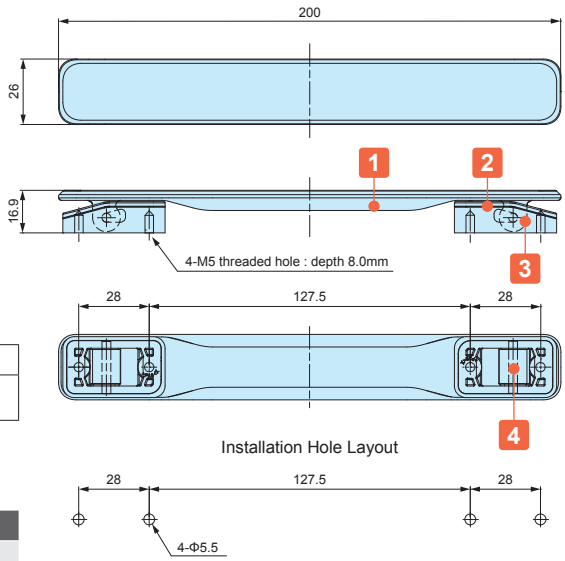

Product no. / Details

Product no.	
● Black	○ Gray
FM200B	FM200G

Technical Data
Max load : 20kg

Components


No.	Part name	Pcs	Material	Color / Finish
1	Grip	1	PU	Black • Gray
2	Base	2	PA6	Black • Gray
3	Base cover	2	ABS	Black • Gray
4	Shaft	2	SWCH	Nickel plated
-	Self-tapping screw (Pan head M5-8)	4	Steel	Trivalent chromate

MH series CARRYING HANDLE

■ DXF/DWG/PDF drawings available on our website.



■ If chemicals, cutting fluid, etc. adhered to, or come into contact with areas where tensile stress is generated, there is a possibility that cracks may develop due to the synergistic effect of the chemicals and stress.

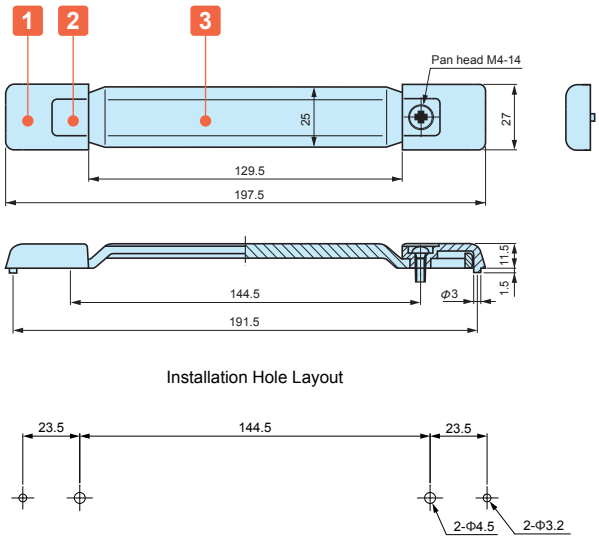

Technical Data
Max load : 20kg

Components

No.	Part name	Pcs	Material	Color / Finish
1	Holder	2	PC + ABS • ABS	Gray • Black
2	Blind cap	2	PP + Elastomer • Elastomer	Gray • Black
3	Grip	1	PP + Elastomer • Elastomer	Gray • Black
–	Screw (Pan head M4-14)	2	Steel	Trivalent chromate
–	Nut (M4)	2	Steel	Trivalent chromate
–	Spring washer	2	Steel	Trivalent chromate

Product no. / Details

Product no.	
● Black	○ Gray
MH-197B	MH-197G