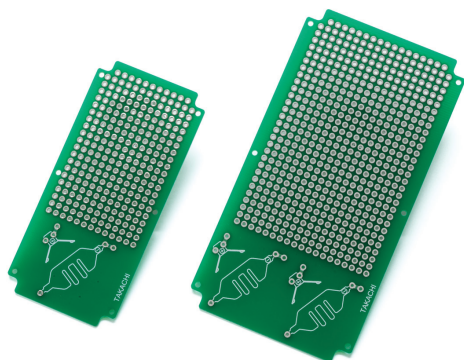
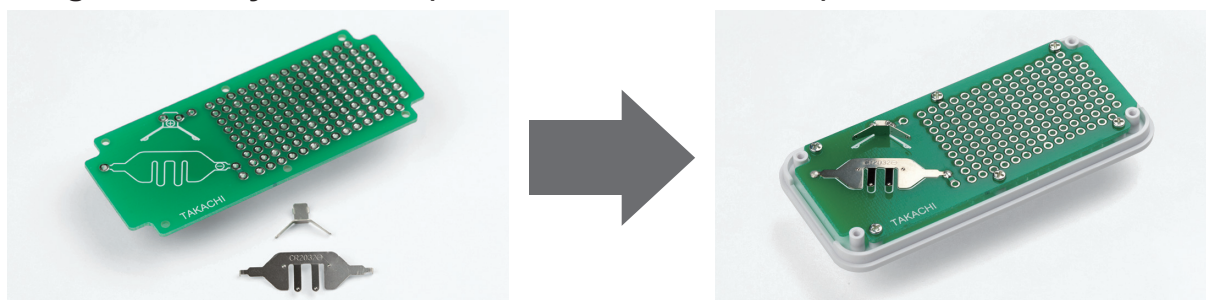


CSPB series**EXCLUSIVE PCB for CS • CSS**

- Exclusive PCB for CS and CSS series.
- Glass epoxy board (FR-4), through-hole on both sides and 2.54mm hole distance.
- Prefabricated holes for battery contact use with CS • CSS case. The contact directions are printed on the PCB.


Soldering the battery contacts (included with each case) onto the PCB**Components**

Part name	Pcs	Material	Color / Finish
PCB	1	Glass epoxy (FR-4) t=1.0	Through-hole • Lead-free solder • Solder resist
Self-tapping screw	6	Steel M1.6	Trivalent chromate


CSPB dimensions

■ DXF/DWG/PDF drawings available on our website.

CSPB-75 • 90 • 100

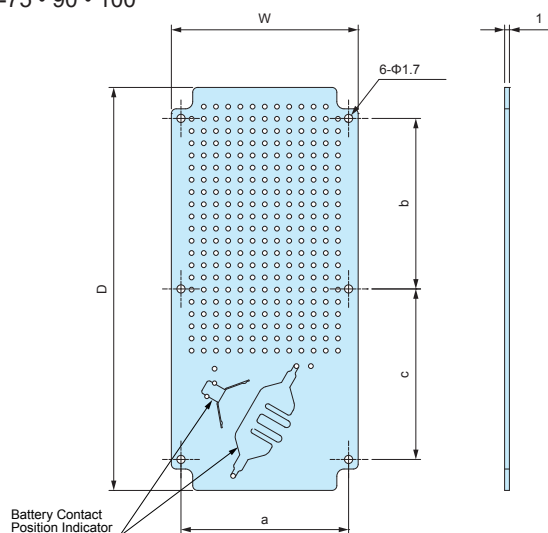

CSPB-115

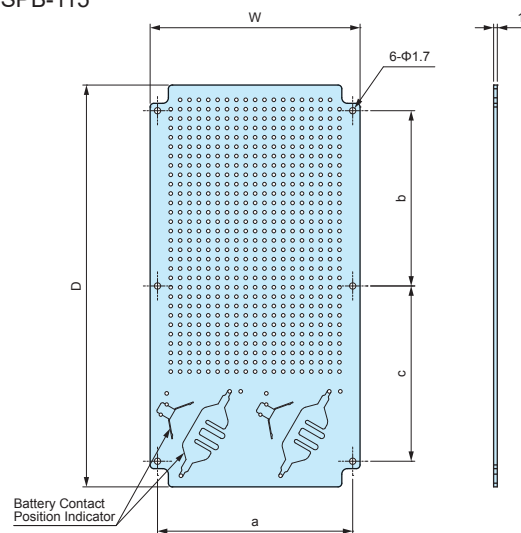


Note : Holes (6-Φ1.7) for PCB mount bosses are un-soldered.

Product no. / Details


Product no.	W	D	a	b	c	Suitable models
CSPB- 75	28.9	68.9	24.9	28	28	CSS 75 • CS 75
CSPB- 90	38.9	83.9	34.9	35.5	35.5	CSS 90 • CS 90
CSPB-100	45	94	38	31	38	CSS100 • CS100
CSPB-115	56.9	108.9	52.9	47.5	47.5	CSS115 • CS115

EM series**PCB MOUNTING SCREW**

Pan head



Bind head



- Self-tapping screws for mounting PCB on bosses or standoffs.
- EM-3-6 self-tapping screws are suitable for mounting 1.6mm or thicker PCB.


Product no. / Details

■ Material / Finish : Steel / Trivalent chromate


Product no.	M	L	Head type	Suitable models	Pack of
EM-1.6	1.6	4	Pan	SMW • CSS • CS SIC • SIM • WC • PS (M1.6 boss models)	50
EM-2	2	5	Pan	PS • TW • TWN • TWF SIC • SIM • PF • WC • WP (M2 boss models)	50
NEW EM-B2	2	5	Bind	SIC • SIM (M2 boss models) SIC • SIM6-12-□ (when installing PCB46-101)	50
EM-2.3	2.3	6	Pan	DRC • WH • LC • LCT • LCS • LCE • PFE WSC (Top cover bosses) PF • PFF (M2.3 boss models) TW • TWN • TWF (M2.3 boss models) WP (M2.3 boss models)	50
EM-2.3-8	2.3	8	Pan	WSC (Bottom base bosses)	50
EM-2.6	2.6	6	Pan	PF • PFF • WP (M2.6 boss models)	50
EM-3	3	5	Pan	SU • OP	50
EM-3-6	3	6	Pan	TWS • TW • TWN • TWF (M3 boss models)	50

MR series**TORX SCREW**

Flat head




Pan head



With pin



★ Without pin



- Self-tapping torx screws for securing of the enclosure.

★ : MR1.6-6S, MR2.6-10□, MR3-5Z□ and MR3-14□ are without pin.

Product no. / Details

★ Mark = Without pin

Product no.	M	L	Head no.	Head style	Material	Finish	Suitable models	Pack of
MR1.6-6S★	1.6	6	T3	Pan	Steel	Nickel plated	CSS • CS	20
MR2.5-8PS	2.5	8	T8	Pan	Steel	Nickel plated	PF • PFE • PFF (M2.5 size)	20
MR2.6-10S★	2.6	10	T8	Flat	Steel	Nickel plated	TW • TWN (M2.6 size)	20
MR2.6-10B★	2.6	10	T8	Flat	Steel	Black trivalent chromate	TWF (M2.6 size)	20
MR2.6-12PS	2.6	12	T8	Pan	Steel	Nickel plated	MX • MXA • MXB • MXF (M2.6 size)	20
MR2.6-14PS	2.6	14	T8	Pan	Steel	Nickel plated	LCT • LCS • LC115-F2 / F3 LCT • LCS • LC145S-F6	20
MR2.6-14S	2.6	14	T8	Flat	Steel	Nickel plated	LCT • LCS • LC115H-F2 / F3 / M2 / 9V LCT • LCS • LC135-F4 / M2 / M3 / 9V LCT • LCS • LC135H-F4 / M2 / M3 / 9V LCT • LCS • LC145-F6 / M2 / M4 LCT • LCS • LC145H-F6 / M2 / M4 LCT • LCS • LC165-M4 LCT • LCS • LC165H-M4	20
MR2.6-18S	2.6	18	T8	Flat	Steel	Nickel plated	LCT • LCS • LC115-N / F2 / F3 LCT • LCS • LC145S-F6 / 145S-N LCE115-N TW • TWN7-2-11 / 7-4-11 / 7-5-11 TWF7-2-11 / 7-4-11 / 7-5-11 / 8-2-8 / 8-4-8	20
MR-1S	3	5	T10	Flat	Steel	Nickel plated	LCT • LCS • LC115H-N / F2 / F3 / M2 / 9V LCT • LCS • LC135-N / F4 / M2 / M3 / 9V LCT • LCS • LC135H-N / F4 / M2 / M3 / 9V LCT • LCS • LC145-N / F6 / M2 / M4 LCT • LCS • LC145H-N / F6 / M2 / M4 LCT • LCS • LC165-N / M4 LCT • LCS • LC165H-N / M4 LCE115H-N • LCE135-N • LCE145H-N • LCE165H-N	20
MR-1B	3	5	T10	Flat	Steel	Black trivalent chromate	UC	20
MR3-5ZS★	3	5	T10	Slotted raised countersunk	Steel	Nickel plated	FC • HY • HYR • HYRH (M3 size)	20
MR3-5ZB★	3	5	T10	Flat	Steel	Black trivalent chromate	CF	20
MR3-8PS	3	8	T10	Pan	Steel	Nickel plated	PF • PFE • PFF (M3 size)	20
MR3-14S★	3	14	T10	Flat	Steel	Nickel plated	TW • TWN (M3 size)	20
MR3-14B★	3	14	T10	Flat	Steel	Black trivalent chromate	TWF (M3 size) MX • MXA • MXB • MXF (M3 size)	20