


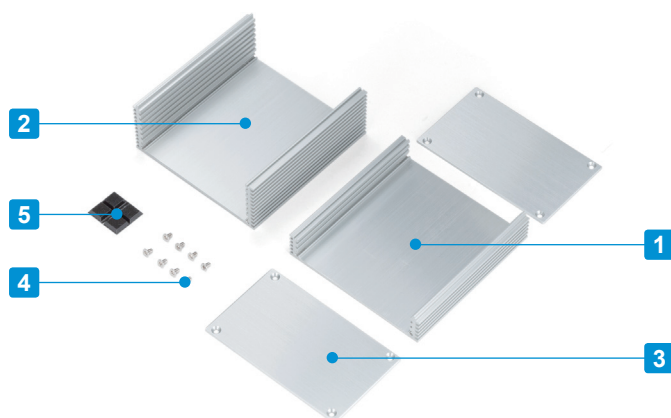

- Stylish design coupled with hairline brushed finish makes for a luxurious high-end case.
- Heat dissipation and cooling via the utilization of extruded aluminium heat-sink top/bottom cover.
- Available in 18 sizes.
- Sturdy extruded case construction.

Included screws

Enclosure (Silver) M3-6 countersunk : Steel : Nickel plated x 8 pcs

Enclosure (Black) M3-6 countersunk : Steel : Black trivalent chromate x 8 pcs

Components

No.	Part name	Pcs	Material	Color / Finish
1	Top cover	1	Extruded aluminium A6063S-T5	Silver • Black / Hairline brushed & Anodized
2	Bottom cover	1	Extruded aluminium A6063S-T5	Silver • Black / Hairline brushed & Anodized
3	Front • Rear panel	2	Aluminium A1050P t=2.0	Silver • Black / Hairline brushed & Anodized
4	Screw	8	Steel countersunk M3-6	Nickel plated • Black trivalent chromate
5	Rubber feet	4	Polyurethane	Black

※HL = Hairline brushed

Accessories (Optional parts)






TORX screw MR-2S
See page EM•MR-1



Aluminium isolation feet AFS • AFM series
See page AFS•AFM-1 ~ AFS•AFM-2

HEN dimensions

■ Drawings below are reference examples only.
DXF/DWG/PDF drawings available on our website.

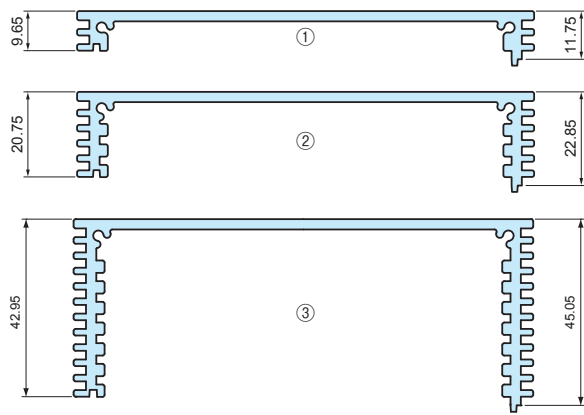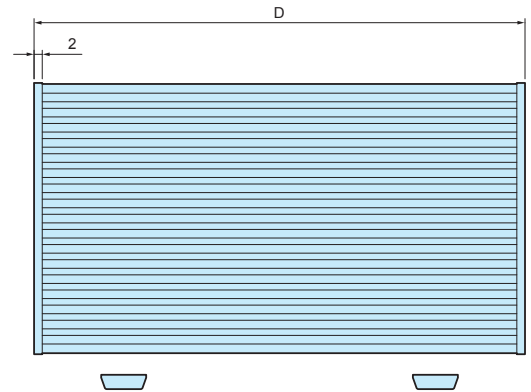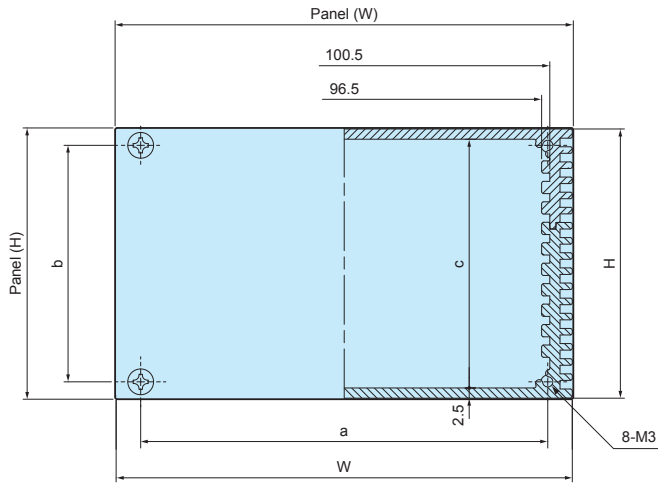

Cover Type

Cover	Cover length (D-4)	※ Thermal resistance rate (°C/W)
①	56	6.7
	116	3.6
	196	2.1
②	56	5
	116	2.6
	196	1.5
③	56	3.3
	116	1.7
	196	0.93

■ Thermal resistance calculation is based on the fins being perpendicular to the ground with temperature at 60°C.

Product no. / Dimensions

Product no.		W	H	D	Panel (W)	Panel (H)	a	b	c	Cover combination	Weight (g)
● Silver	● Black										
HEN110206S	HEN110206B	111.2	21.4	60	112	21.9	99.2	13.4	16.4	①×2	143
HEN110212S	HEN110212B	111.2	21.4	120	112	21.9	99.2	13.4	16.4		258
HEN110220S	HEN110220B	111.2	21.4	200	112	21.9	99.2	13.4	16.4		411
HEN110306S	HEN110306B	111.2	32.5	60	112	33.0	99.2	24.5	27.5	①×1 ②×1	179
HEN110312S	HEN110312B	111.2	32.5	120	112	33.0	99.2	24.5	27.5		311
HEN110320S	HEN110320B	111.2	32.5	200	112	33.0	99.2	24.5	27.5		488
HEN110406S	HEN110406B	111.2	43.6	60	112	44.1	99.2	35.6	38.6	②×2	215
HEN110412S	HEN110412B	111.2	43.6	120	112	44.1	99.2	35.6	38.6		365
HEN110420S	HEN110420B	111.2	43.6	200	112	44.1	99.2	35.6	38.6		565
HEN110506S	HEN110506B	111.2	54.7	60	112	55.2	99.2	46.7	49.7	①×1 ③×1	250
HEN110512S	HEN110512B	111.2	54.7	120	112	55.2	99.2	46.7	49.7		417
HEN110520S	HEN110520B	111.2	54.7	200	112	55.2	99.2	46.7	49.7		640
HEN110606S	HEN110606B	111.2	65.8	60	112	66.3	99.2	57.8	60.8	②×1 ③×1	286
HEN110612S	HEN110612B	111.2	65.8	120	112	66.3	99.2	57.8	60.8		471
HEN110620S	HEN110620B	111.2	65.8	200	112	66.3	99.2	57.8	60.8		717
HEN110806S	HEN110806B	111.2	88.0	60	112	88.5	99.2	80.8	83.0	③×2	358
HEN110812S	HEN110812B	111.2	88.0	120	112	88.5	99.2	80.8	83.0		577
HEN110820S	HEN110820B	111.2	88.0	200	112	88.5	99.2	80.8	83.0		869

APPLICATION EXAMPLE AUDIO POWER SUPPLY

Product by AY-densi (Japan)



AFS•AFM series

ALUMINIUM ISOLATION FEET



External type / Shot blast finish AFS series



Internal type / Reflective finish AFM series


- The surface treatment and finish allows the feet to exhibit a polished and luxurious feel.
- Non-slip NBR O-ring is located on the underside of the feet.

Product no. / Details

Product no.		D	H	Installation type	C	a	b	Pack of
● Silver	● Black							
AFS20- 8S	AFS20- 8B	20	8	External	Φ3.4	3	9	4
AFS25-10S	AFS25-10B	25	10	External	Φ4.5	4	12	4
AFS30-12S	AFS30-12B	30	12	External	Φ4.5	5	12	4
AFS35-14S	AFS35-14B	35	14	External	Φ4.5	5	12	4
AFS39-16S	AFS39-16B	39	16	External	Φ4.5	5	15	4
AFS44-18S	AFS44-18B	44	18	External	Φ4.5	5	20	4
AFS55-20S	AFS55-20B	55	20	External	Φ5.5	5	20	4
AFM15- 7S	—	15	7	Internal	M3	4	—	4
AFM20- 9S	—	20	9	Internal	M3	5	—	4
AFM25-12S	—	25	12	Internal	M4	7	—	4
AFM30-14S	—	30	14	Internal	M4	8	—	4
AFM35-16S	—	35	16	Internal	M4	10	—	4
AFM39-18S	—	39	18	Internal	M4	10	—	4
AFM44-20S	—	44	20	Internal	M4	10	—	4
AFM55-22S	—	55	22	Internal	M5	15	—	4


AFS • AFM dimensions

AFS series

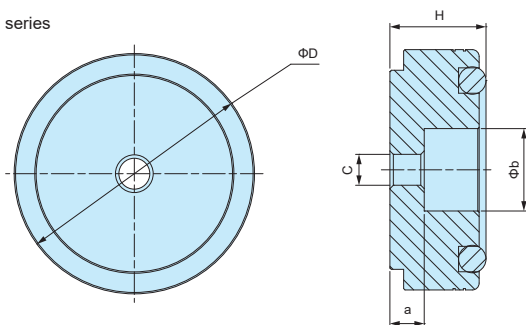

- DXF/DWG/PDF/STP drawings available on our website.

AFM series

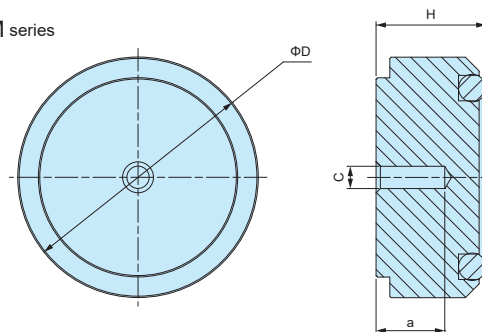

APPLICATION EXAMPLE

