



EV series


CONDUCTIVE SCREW



Conductive



EV dimensions

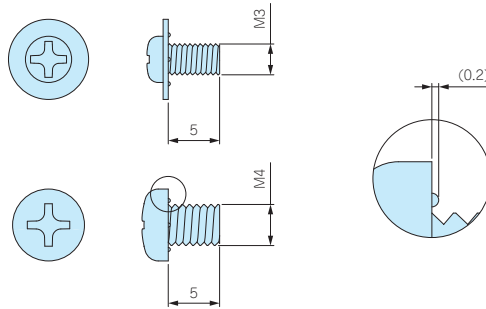

Base material exposed after being shaved.



Example: Internal grounding use.



- When tightened, protrusions on the underside of the screw head will shave away at the painted or anodized surface to expose the base material for achieving conductivity.

Product no. / Dimensions

Product no.	M	L	Material	Finish	Suitable series	Pack of
EV3-5S	3	5	Steel	Nickel plated	YM • MB • others	20
NEW EV-4S	4	5	Steel	Nickel plated	BDN • others	20

PLS • MTS • PM series

CAPTIVE FASTENER • CAPTIVE SCREW



PLS-1G
Plastic fastener




MTS-1
Metal fastener



MTS-3
Metal fastener



Hole layout for mounting



Product no. / Dimensions Fastener

Product no.	M	Material	Color / Finish	Pack of
PLS-1G	2.5	POM	White gray	50
NEW MTS-1	2.5	Steel	Zinc plated	8
NEW MTS-3	2.5	Steel	Nickel plated	10

NEW Conductive

PM-1□


PM-2□

PM-3



PM dimensions

PM-1□ • PM-2□

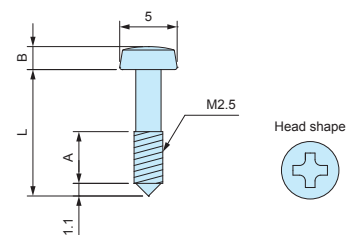

Product no. / Dimensions Screw

Product no.	Material	Finish	L	A	B	Suitable screw driver	Pack of
PM-1B	Steel	Black trivalent chromate	10	4	1.5	#1	50
PM-1S	Steel	Chrome plated	10	4	1.5	#1	50
PM-2B	Steel	Black trivalent chromate	11	5	2	#2	50
PM-2S	Steel	Nickel plated	11	5	2	#2	50
NEW PM-3	Steel	Nickel plated	7	2.5	2	#2	50

