

**NMG** series**NEODYMIUM MAGNET****Round magnet**


■ DXF/DWG/PDF drawings available on our website.



- Material / Finish: Neodymium / Nickel plated
- Please attach using a strong adhesive.

**Product no. / Details**


Product no.	a	b	Weight (g)	Flux Density	Absorption
NMG3-15N	15	3	4	214.4 mT	2.44 kgf
NMG3-20N	20	3	7.1	170.7 mT	3.26 kgf
NMG5-22N	22	5	11.4	247.2 mT	5.91 kgf
NMG5-25N	25	5	18.4	221.9 mT	6.89 kgf

**NMG dimensions****Round magnet with countersunk hole**

- Please fasten with a screw.

**Product no. / Details**

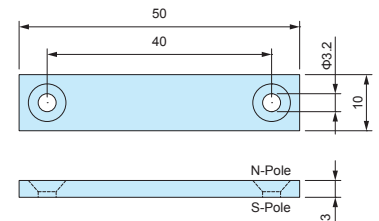
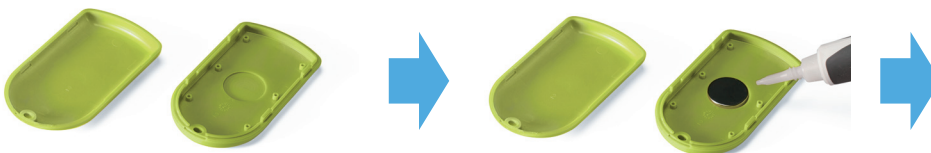
Product no.	a	b	c	Countersunk size	Weight (g)	Flux Density	Absorption
NMG3-15M3	15	3.2	3	M3	3.8	214.3 mT	2.33 kgf
NMG3-20M3	20	3.2	3	M3	6.9	170.6 mT	3.17 kgf
NMG5-22M4	22	4.3	5	M4	13.7	247.2 mT	5.68 kgf
NMG5-25M5	25	5.3	5	M5	17.6	221.9 mT	6.58 kgf

**Rectangular magnet with countersunk holes**

- Please fasten with a screw.

**Product no. / Details**

Product no.	a	b	c	Countersunk size	Weight (g)	Flux Density	Absorption
NMG3-50M3	50	10	3	M3	11.3	210.0 mT	9.1 kgf

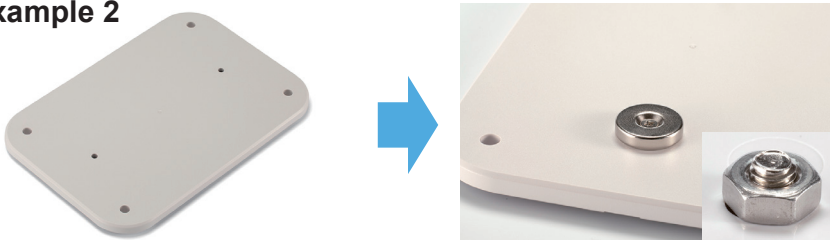
**Example 1** The magnetic force remains strong even through plastic.

Make recessed pocket on the inside wall.

Glue on.



Attach onto a metallic surface.

**Example 2**

Make holes

Fasten with a screw and nut.



Attach onto a metallic surface.

**CAUTION: Handle with care to avoid personal injury or damage to the magnet.**