



TAKACHI ELECTRONICS ENCLOSURE CO., LTD.

3-21-16 Higashi-ryoke, Kawaguchi-shi, Saitama, 332-0003 JAPAN


Tel. +81-48-222-5409 / Fax. +81-48-222-7652

July 28, 2023

NOTICE


RM·RMW series - Changes to Cap design

- Affected series / models : RM series: ALL (excluding RM50L-38□ & RM63L-44□)
RMW series: ALL (excluding RM50L-38□)

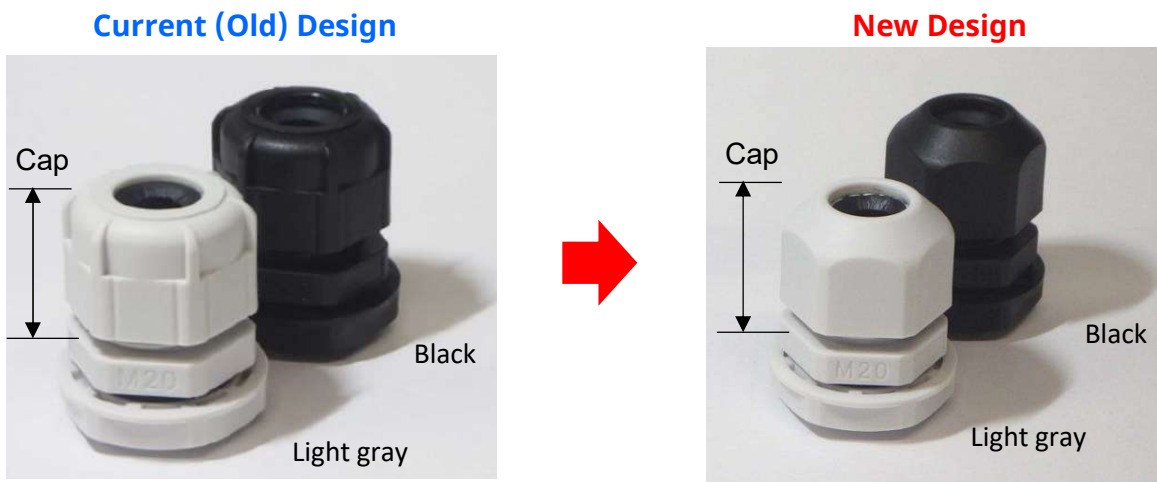

- Changes : Mold renewal and design change on the cap.
- Purpose: To ensure consistent quality throughout via streamlined supply chain and materials.
- Effective date : Once present inventory has run out / been depleted.
- Note 1: No changes to material and color.
- Note 2: No changes to item product number or pricing.

Thank you for your understanding.
For more information, kindly contact us at: sales@takachi-el.co.jp

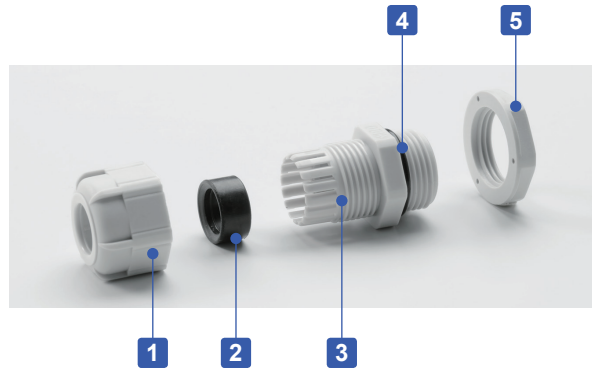


- Low cost cable glands made from polyamide material.
- Wide selection, for M8 ~ M63, suitable for $\Phi 1\text{mm} \sim \Phi 44\text{ mm}$ cable.
- High oil resistant NBR rubber sealing and O-ring.
- IP67 protection class.

Components

■ PA = Polyamide

No.	Part name	Material
1	Cap	PA66 UL94V-2
2	Sealing insert	NBR
3	Connector	PA66 UL94V-2
4	O-ring	NBR
5	Lock nut	PA66 UL94V-2

RM dimensions ■ DXF/DWG/PDF drawings available on our website.

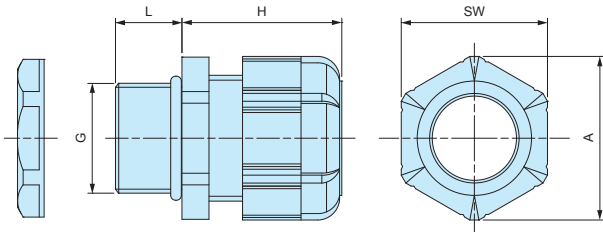

Technical Data

Protection class: IP67
Operating temperature: $-20^{\circ}\text{C} \sim +80^{\circ}\text{C}$

- Lock nut is not included for RM8S-2.5, 8S-4, and 10S-6 models.
Please drill a proper thread hole into the enclosure for installation.

Product no. / Dimensions


Product no.		G		Cable range		L	H Max	SW	A	Pack of
● Black	● Light gray	Thread size	Mounting hole	Min	Max					
RM8S-2.5B	RM8S-2.5S	M8×1.25	—	1	2.5	7.5	19.5	11.8	13.5	1
RM8L-2.5B	RM8L-2.5S	M8×1.25	$\Phi 8.2$	1	2.5	13	19.5	11.8	13.5	1
RM8S-4B	RM8S-4S	M8×1.25	—	2.5	4	7.5	19.5	11.8	13.5	1
RM8L-4B	RM8L-4S	M8×1.25	$\Phi 8.2$	2.5	4	13	19.5	11.8	13.5	1
RM10S-6B	RM10S-6S	M10×1.5	—	3	6	8	20.5	13	14.4	1
RM10L-6B	RM10L-6S	M10×1.5	$\Phi 10.2$	3	6	13	20.5	13	14.4	1
RM12S-7B	RM12S-7S	M12×1.5	$\Phi 12.2$	3.5	7	9	20.5	16	17.6	1
RM12L-7B	RM12L-7S	M12×1.5	$\Phi 12.2$	3.5	7	14.5	20.5	16	17.7	1
RM16S-8B	RM16S-8S	M16×1.5	$\Phi 16.2$	4	8	9	23.5	19	21	1
RM16L-8B	RM16L-8S	M16×1.5	$\Phi 16.2$	4	8	15	24	19	21	1
RM20S-12B	RM20S-12S	M20×1.5	$\Phi 20.2$	6	12	10	29	24	26.2	1
RM20L-12B	RM20L-12S	M20×1.5	$\Phi 20.2$	6	12	15	28.5	24	26.2	1
RM25L-17B	RM25L-17S	M25×1.5	$\Phi 25.2$	11	17	15	35	33	36.2	1
RM32L-21B	RM32L-21S	M32×1.5	$\Phi 32.3$	13	21	15	38	36	39.5	1
RM40L-27B	RM40L-27S	M40×1.5	$\Phi 40.3$	18	27	18	43.5	45.7	50.5	1
RM50L-38B	RM50L-38S	M50×1.5	$\Phi 50.4$	27	38	20	50.5	60	66.5	1
RM63L-44B	RM63L-44S	M63×1.5	$\Phi 63.4$	37	44	20	53	68	75.5	1
RM10L-6B-P	RM10L-6S-P	M10×1.5	$\Phi 10.2$	3	6	13	20.5	13	14.4	100
RM12S-7B-P	RM12S-7S-P	M12×1.5	$\Phi 12.2$	3.5	7	9	20.5	16	17.6	100
RM12L-7B-P	RM12L-7S-P	M12×1.5	$\Phi 12.2$	3.5	7	14.5	20.5	16	17.7	100
RM16S-8B-P	RM16S-8S-P	M16×1.5	$\Phi 16.2$	4	8	9	23.5	19	21	100
RM16L-8B-P	RM16L-8S-P	M16×1.5	$\Phi 16.2$	4	8	15	24	19	21	100
RM20S-12B-P	RM20S-12S-P	M20×1.5	$\Phi 20.2$	6	12	10	29	24	26.2	100
RM20L-12B-P	RM20L-12S-P	M20×1.5	$\Phi 20.2$	6	12	15	28.5	24	26.2	100
RM25L-17B-P	RM25L-17S-P	M25×1.5	$\Phi 25.2$	11	17	15	35	33	36.2	100

SP SERIES

SEALING PLUG



SP dimensions

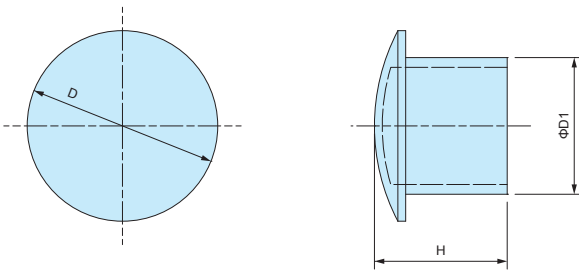

■ Material : Nylon

- Sealing plug for cable glands when not in use.
- Maintain a waterproof seal when plugged into the sealing insert on cable glands.

Product no. / Dimensions

Product no.	D	D1	H	Suitable cable glands	Pack of
SP-12	10.2	6	15.5	RMW12, RM12, RMW16, RM16, RPG7, RPG9	10
SP-16	15.6	9.5	15.5	RMW20, RM20, RPG11, RPG13.5	10
SP-20	19.6	13.5	16.5	RPG16	10
SP-25	24.4	17.5	17	RMW25, RM25, RMW32, RM32, RPG21	5
SP-40	32.5	24.5	17.5	RMW40, RM40, RPG29	5
SP-50	47.2	38.9	17.6	RMW50, RM50	5



- Torque wrench with interchangeable head.
- Suitable for the tightening of cable glands requiring a specific torque.
- Open end interchangeable head (spanner head) TWE series available separately.
- Spanner head is not included.

Product no. / Details

Product no.	Length	Torque range (N · m)	Increments (N · m)
TWH0.5-5	215	0.5 ~ 5.0	0.05



Notes

The torque wrench is not subject to RoHS regulations.

Since it is an OEM product and not a JIS-compliant product, no calibration services or inspection reports, etc. are provided.

When tightening, proceed first with a low value (half of the reference) of the recommended torque, and set the appropriate tightening torque for the cable and mounting part that will be tightened thereafter.

Please read the operation manual (refer to TAKACHI website) before use to ensure correct and safe usage of the product.

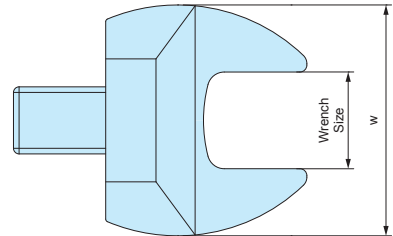

- Dedicated open end interchangeable head for TWH series.
- Various interchangeable heads are available to fit a range of cable gland sizes.

Product no. / Details

Product no.	Wrench size	w	t
TWE- 8	8	27	6
TWE- 9	9	27	6
TWE-11	11	27	6
TWE-12	12	30	6
TWE-13	13	31	6
TWE-15	15	40	9
TWE-16	16	40	9
TWE-17	17	41	9
TWE-18	18	42	9
TWE-19	19	42	10
TWE-21	21	47	10

Product no.	Wrench size	w	t
TWE-22	22	52	10
TWE-23	23	53	11
TWE-24	24	55	11
TWE-27	27	58	13
TWE-29	29	58	13
TWE-30	30	65	14
TWE-32	32	65	14
TWE-33	33	65	14
TWE-34	34	70	15
TWE-36	36	72	15

Note: These open end head is not subject to RoHS regulations.

Suitable TWE model

RM • RMW series


Product no.	Cap width	Suitable model	Lock nut width	Suitable model
RM8S-2.5	11.8	TWE-12	–	n/a
RM • RMW8L-2.5	11.8	TWE-12	12.6	TWE-13
RM8S-4	11.8	TWE-12	–	n/a
RM • RMW8L-4	11.8	TWE-12	12.6	TWE-13
RM • RMW10S-6	13	TWE-13	–	n/a
RM • RMW10L-6	13	TWE-13	14.8	TWE-15
RM • RMW12S-7	16	TWE-16	17	TWE-17
RM • RMW12L-7	16	TWE-16	17	TWE-17
RM • RMW16S-8	19	TWE-19	22	TWE-22
RM • RMW16L-8	19	TWE-19	22	TWE-22
RM • RMW20S-12	24	TWE-24	26.2	n/a
RM • RMW20L-12	24	TWE-24	26.2	n/a
RM • RMW25L-17	33	TWE-33	32.6	n/a
RM • RMW32L-21	36	TWE-36	40.3	n/a
RM • RMW40L-27	45.7	n/a	51	n/a
RM • RMW50L-38	60	n/a	61.2	n/a
RM63L-44	68	n/a	73.4	n/a

RPG series

Product no.	Cap width	Suitable model	Lock nut width	Suitable model
RPG7-7	16	TWE-16	18.7	TWE-19
RPG9-8	19	TWE-19	21.8	TWE-22
RPG11-10	22	TWE-22	23.7	TWE-24
RPG13.5-11	24	TWE-24	27	TWE-27
RPG16-14	26.7	TWE-27	29.8	TWE-30
RPG21-18	33	n/a	35.8	TWE-36
RPG29-25	42	n/a	45.8	n/a

RSP series

Product no.	Cap width	Suitable model	Lock nut width	Suitable model
RSP12-6	16	TWE-16	17	TWE-17
RSP16-8	19.5	n/a	22	TWE-22
RSP20-11	24	TWE-24	26.2	n/a
RSP25-16	33	TWE-33	32.6	n/a

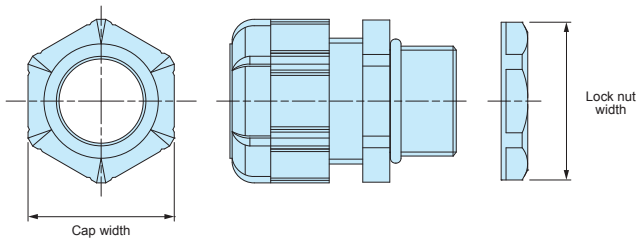

Note 1) ""n/a"" indicates no suitable spanner head size and torque value available.
 Note 2) Dimensions of Cap and Lock nut width are in mm.

AG series

Product no.	Cap width	Suitable model	Lock nut width	Suitable model
AG8-3.5	12	TWE-12	–	n/a
AG8-5	12	TWE-12	–	n/a
AG10-6	15	TWE-15	–	n/a
AG12-5	17	TWE-17	17	TWE-17
AG12-6.5	17	TWE-17	17	TWE-17
AG12-8	17	TWE-17	17	TWE-17
AG16-10	21	TWE-21	22	TWE-22
AG20-15	27	TWE-27	27	TWE-27
AG25-16	34	TWE-34	33	TWE-33
AG25-20	34	TWE-34	33	TWE-33
AG32-25.5	41	n/a	42	n/a
AG40-28.5	50	n/a	48	n/a
AG40-33	50	n/a	48	n/a
AG50-37	60	n/a	59	n/a
AG50-42	60	n/a	59	n/a

AGM series

Product no.	Cap width	Suitable model	Lock nut width	Suitable model
AGM6-2.5	8	TWE-8	9	TWE- 9
AGM6-3	8	TWE-8	9	TWE- 9
AGM6-3.5	8	TWE-8	9	TWE- 9
AGM8-5	11	TWE-11	11	TWE-11
AGM10-6	13	TWE-13	13	TWE-13
AGM12-8	15	TWE-15	15	TWE-15
AGM16-10.5	18	TWE-18	19	TWE-19
AGM20-15	24	TWE-24	24	TWE-24
AGM25-20	30	TWE-30	30	TWE-30
AGM32-25.5	36	TWE-36	36	TWE-36
AGM40-28.5	46	n/a	51	n/a
AGM40-33	46	n/a	51	n/a
AGM50-37	55	n/a	60	n/a
AGM50-42	55	n/a	60	n/a

AGE series

Product no.	Cap width	Suitable model	Lock nut width	Suitable model
AGE12-5	15	TWE-15	15	TWE-15
AGE12-6.5	15	TWE-15	15	TWE-15
AGE16-10.5	18	TWE-18	19	TWE-19
AGE20-15	24	TWE-24	24	TWE-24
AGE25-20	30	TWE-30	30	TWE-30
AGE32-25	36	n/a	36	n/a

AGH series

Product no.	Cap width	Suitable model	Lock nut width	Suitable model
AGH10-6	13	TWE-13	13	TWE-13
AGH12-8	15	TWE-15	15	TWE-15
AGH16-10.5	18	TWE-18	19	TWE-19
AGH20-15	24	TWE-24	24	TWE-24
AGH25-20	30	TWE-30	30	TWE-30
AGH32-25.5	36	TWE-36	36	TWE-36