

Raspberry Pi HEAT-SINK ALUMINIUM CASE

**Made with Aluminium Diecast Material
for Excellent Heat Dissipation and Rigidity**

Exceptional Functionality with Superb Cost Efficiency!



RPH series



3 different types are available: Desktop, Flanged and DIN Rail

Desktop type

RPH-5

RPH-4B



Flanged type

RPH-5-F

RPH-4B-F



DIN Rail type

RPHD-5

RPHD-4B




Available in metallic silver and black for Raspberry Pi 4 Model B and Raspberry Pi 5.


Compatible with VESA Mount Standards (75 x 75mm / 100 x 100mm), and can be installed on the back side of PC displays, etc.

Available with DIN Rail mounting bracket. Perfect for mounting on control panels or switchboards.

Efficient Heat Dissipation Construct to Maximize your Raspberry Pi Performance!

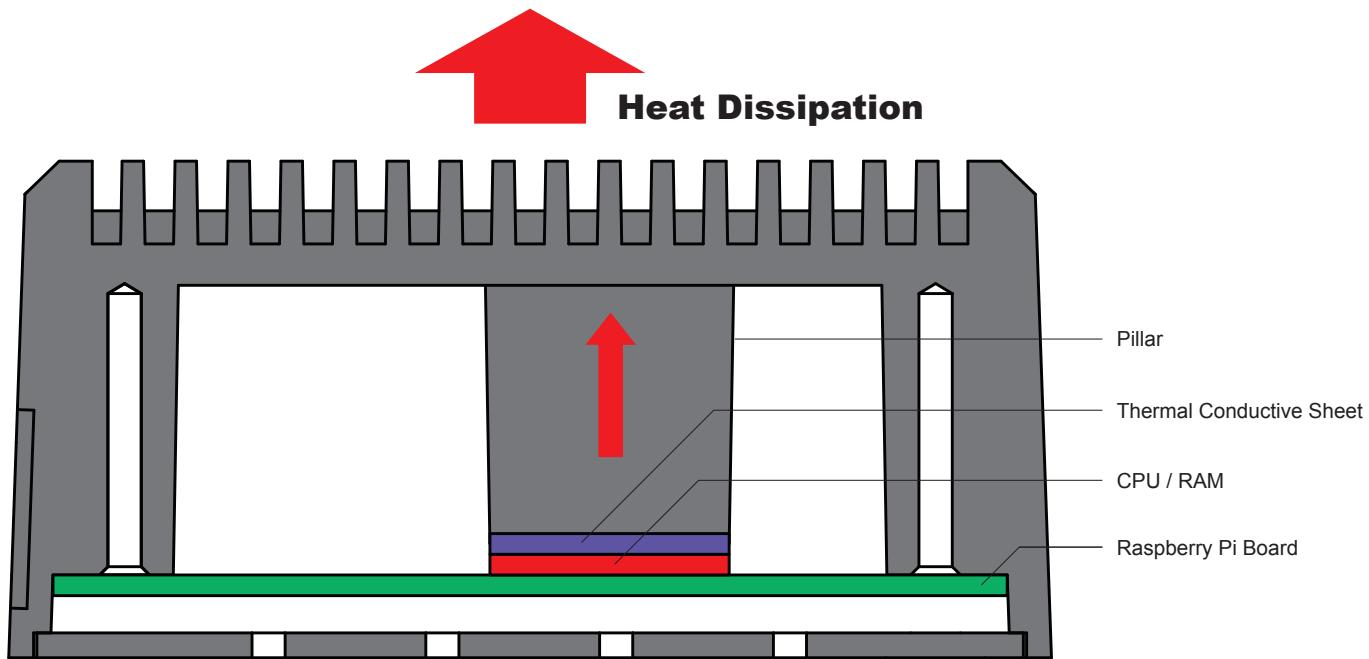

- Attach thermal conductive sheet onto CPU and RAM. Heat is transferred to the heat-sink cover through the pillar.

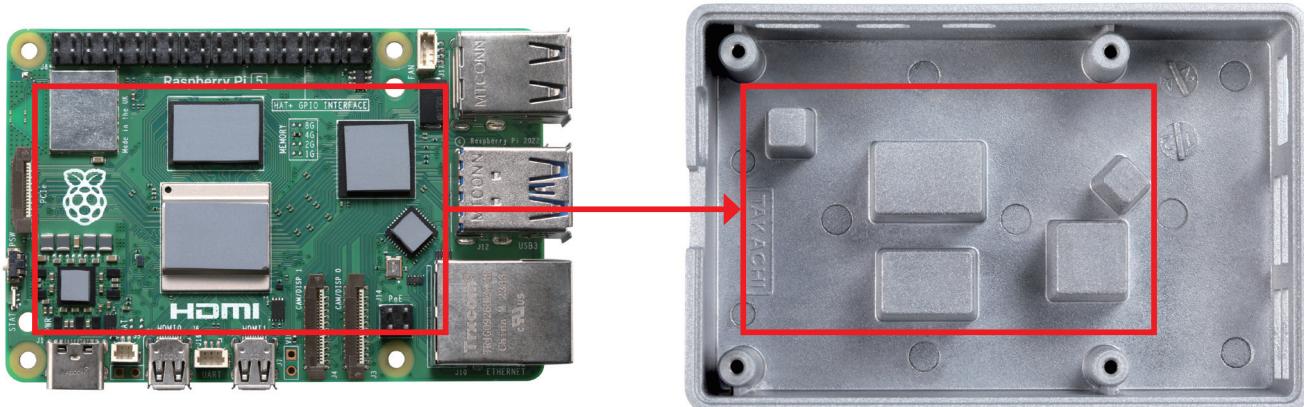


*The model shown above is for Raspberry Pi 5. The model for Raspberry Pi 4 model B has a different configuration.


2 different Heat dissipation types and Normal type are available.

*The Pillar and the Thermal Conductive Sheet configuration varies by models.

RPH-5-H (Heat dissipation)
RPH-4B-H (Heat dissipation)

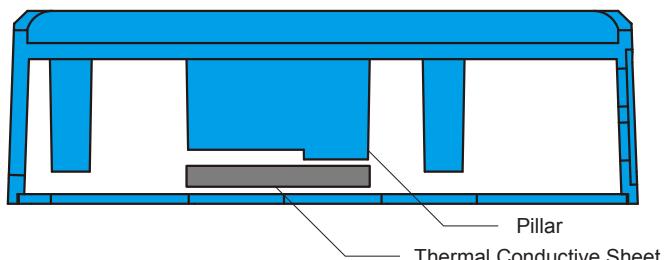

RPH-4B-N (Normal)

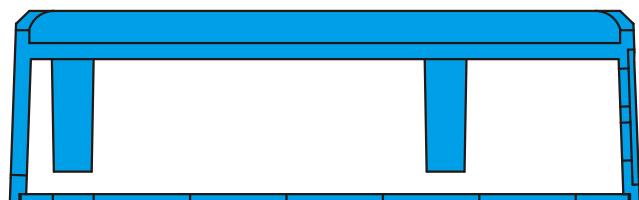

RPHD series DIN RAIL MOUNT Raspberry Pi HEAT-SINK CASE




Heat Resistant




- New RPHD-5H-S model compatible with Raspberry Pi 5 is now available.
- DIN Rail mount heat-sink case exclusively for use with Raspberry Pi 4 model B and Raspberry Pi 5. Equipped with highly efficient heat-sink top cover.
- Constructed using diecast aluminium for strength and rigidity.
- The Heat dissipation type is available for both the Pi 4B and 5, while the Normal type is only available for the Pi 4B.
- Raspberry Pi board is not included.
- Note that oil bleed may occur with thermal conductive sheets.

Technical Data
Max load : 300g Operating Temperature : -20°C ~ +80°C

RPHD-4B

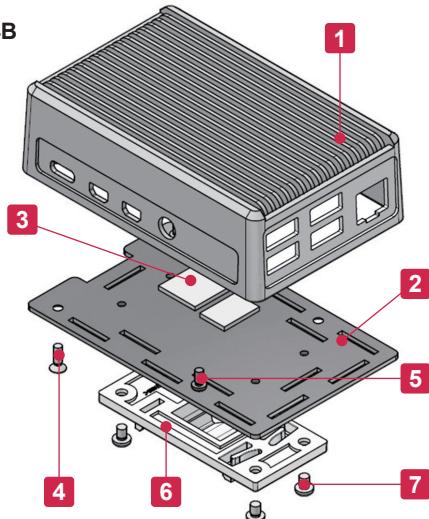

RPHD-5

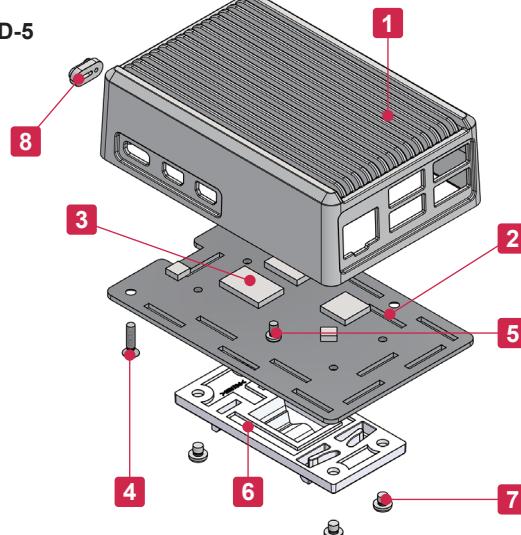


Components

No.	Part name	Pcs	Material	Color / Finish
1	Top cover	1	Diecast aluminium ADC12	Silver / Painted
2	Base	1	Aluminium A1100P t=1.5	Metallic silver / Painted (Conductive inside)
3	Thermal conductive sheet (RPHD-4B-H)	2	Silicone polymer + Ceramic composite	Gray
4	Thermal conductive sheet (RPHD-5-H)	5	Silicone	Gray
4	Screw (M2.5-10 flat head)	2	Steel	Trivalent chromate
5	Screw for Board (M2.5-4 pan head)	2	Steel	Trivalent chromate
6	Din-rail mounting base	1	PC + ABS UL94V-0	Light gray
7	Screw for Din-rail mounting base (M3-3 pan head)	4	Steel	Trivalent chromate
8	Power button access cap (RPHD-5)	1	Polycarbonate	Transparent

RPHD dimensions

■ DXF/DWG/PDF/STP drawings available on our website.

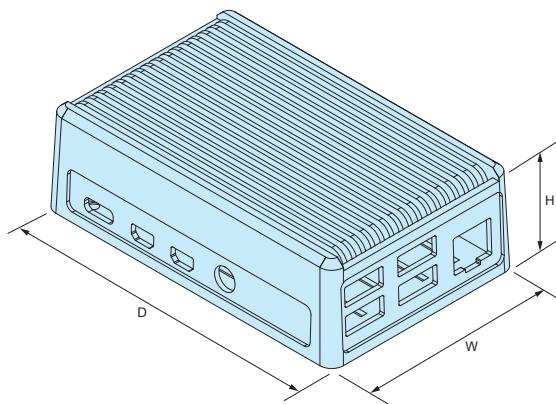

Product no. / Details

Product no.	External dimensions			Pillar Thermal conductive sheets	※Thermal resistance rate (°C/W)	Weight (g)
	W	H	D			
NEW RPHD-5-H-S	63	30	96	○	7.41	173.4
RPHD-4B-H-S	63	30	98	○	7.31	168.2
RPHD-4B-N-S	63	30	98	×	7.31	150.7


*Din-rail mounting base height is not included in H dimension.

※ Thermal resistance test condition

- Ambient air cooling.
- Heat-sink fins are set perpendicular to the ground with temperature at 60°C.
- Powder coated aluminium diecast.
- Heat source is applied on the opposite side (inner side) of the fins.

■ 2 different Heat Dissipation types and Normal type are available.

RPHD-5-H, RPHD-4B-H (Heat dissipation)

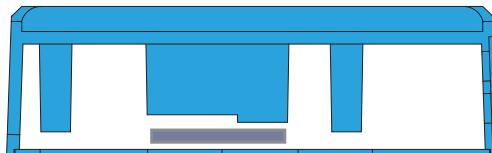

RPHD-4B-N (Normal)



Power button for Raspberry Pi 5


In conjunction with the addition of a power button to the Raspberry Pi 5 board, RPHD-5-H-S model comes with a cover for the power button.



Accessories (Optional parts)



DIN Rail FDR series
See page 100



Economical DIN Rail end stopper DRS series
See page 99



DIN Rail terminal block end stopper TKR series
See page 99

RPH series


Raspberry Pi HEAT-SINK ALUMINIUM CASE



Heat Resistant



- New RPH-5-H • FH model compatible with Raspberry Pi 5 is now available.
- Heat-sink top cover case exclusively for use with the Raspberry Pi.
- Equipped with highly efficient heat-sink top cover.
- Constructed using diecast aluminium for strength and rigidity.
- The Heat dissipation type is available for both the Pi 4B and 5, while the Normal type is only available for the Pi 4B.
- Both Pi 4B and 5 are available in a Desktop and Flanged wall mount configuration.
- Flanged wall mount type is compatible with VESA Mount Standards (75 x 75mm / 100 x 100mm) and can be installed on the back side of PC displays, etc.
- Raspberry Pi board is not included.
- Note that oil bleed may occur with thermal conductive sheets.

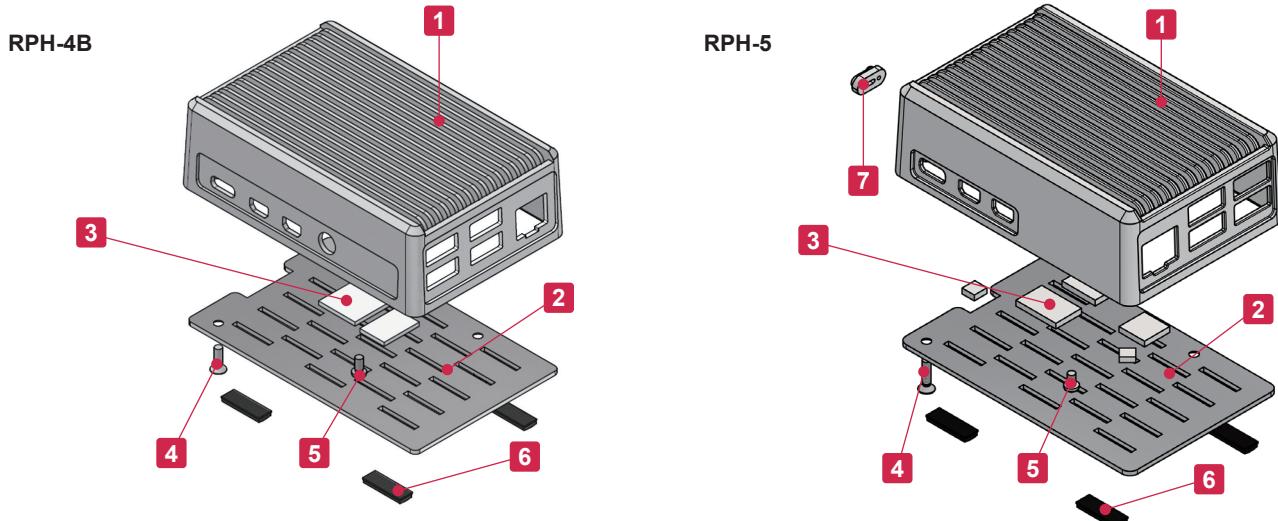


Components

No.	Part name	Pcs	Material	Color / Finish
1	Top cover	1	Diecast aluminium ADC12	Silver • Black / Painted
2	Base	1	Aluminium A1100P t=1.5	Metallic silver / Painted (Conductive inside) • Black / Painted
3	Thermal conductive sheet (RPH-4B-H type only)	2	Silicone polymer + Ceramic composite	Gray
3	Thermal conductive sheet (RPH-5 type only)	5	Silicone	Gray
4	Screw (M2.5-10 flat head)	2	Steel	Trivalent chromate • Black trivalent chromate
5	Screw for Board (M2.5-4 pan head)	2	Steel	Trivalent chromate
6	Rubber feet *	4	Polyurethane	Black
7	Power button access cap	1	Polycarbonate	Transparent

* Not applicable to flanged models.


RPH dimensions

RPH-5-H, RPH-4B-H, RPH-4B-N (Desktop)

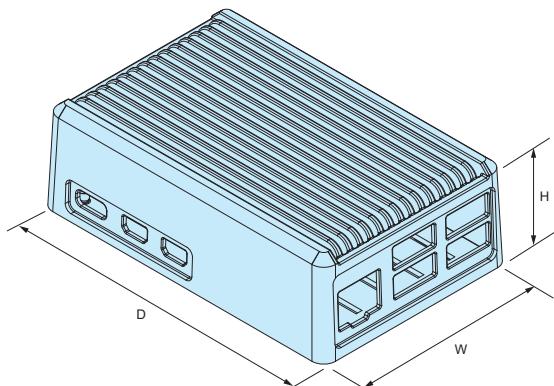

■ DXF/DWG/PDF/STP drawings available on our website.

RPH-5-FH, RPH-4B-FH, RPH-4B-FN (Flanged)

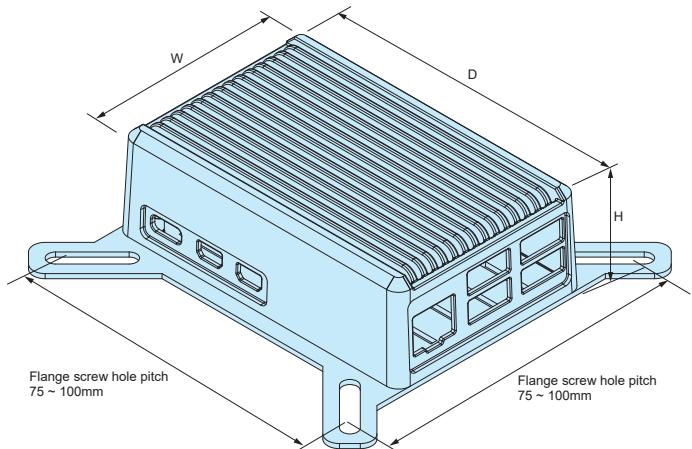

Product no. / Details

Product no.		External dimensions			Type	Included accessory	※Thermal resistance rate (°C/W)	Weight (g)
● Silver	● Black	W	H	D				
NEW RPH-5-H-S	NEW RPH-5-H-B	63	30	96	Desktop Heat dissipation	Rubber feet	7.41	165.5
RPH-4B-H-S	RPH-4B-H-B	63	30	98		Thermal conductive sheets	7.31	159.9
RPH-4B-N-S	RPH-4B-N-B	63	30	98	Desktop Normal	Rubber feet	7.31	142
NEW RPH-5-FH-S	NEW RPH-5-FH-B	63	31.5	96	Flanged Heat dissipation	Thermal conductive sheets	7.41	174.2
RPH-4B-FH-S	RPH-4B-FH-B	63	31.5	98	Flanged Heat dissipation	Thermal conductive sheets	7.31	168.2
RPH-4B-FN-S	RPH-4B-FN-B	63	31.5	98	Flanged Normal	—	7.31	150.3

※ Thermal resistance test condition

- Ambient air cooling.
- Heat-sink fins are set perpendicular to the ground with temperature at 60°C.
- Powder coated aluminium diecast.
- Heat source is applied on the opposite side (inner side) of the fins.

Temperature measurement test

Raspberry Pi board is placed into the RPH-H model and a commercially available Raspberry Pi plastic case.


Temperature is measured after 6 hours of continuous operation.

*Results will vary depending on usage period and environment. Listed values are in-house test reference values only.




Power button for Raspberry Pi 5

In conjunction with the addition of a power button to the Raspberry Pi 5 board, RPH-5-H and RPH-5-FH models come with a cover for the power button.

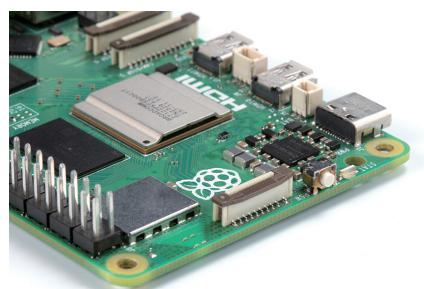

RPDM-5

Raspberry Pi 5 DIN RAIL CASE

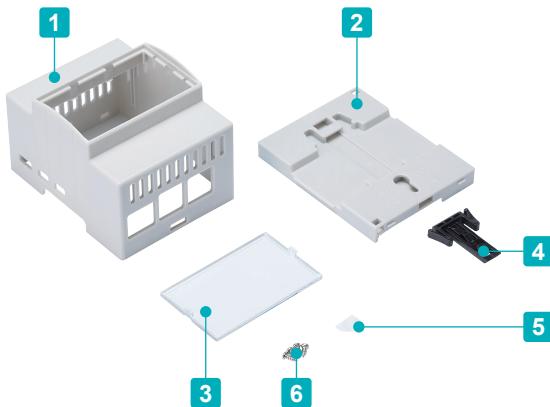

■ DIN rail mount case exclusively for use with the Raspberry Pi 5.
Able to assemble easily with a flathead screw driver; no screws required.
*Caution : Material may easily break when assembling.


■ Raspberry Pi board is not included.

Components

No.	Part name	Pcs	Material	Color / Finish
1	Body	1	ABS	Gray
2	Base	1	ABS	Gray
3	Front panel	1	ABS	Transparent
4	Lever	1	ABS	Black
5	Transparent window	1	Acrylic	Translucent
6	Screw for Board	4*	Steel	Silver

*2 out of 4 pieces are spares.

RPDM-5 dimensions

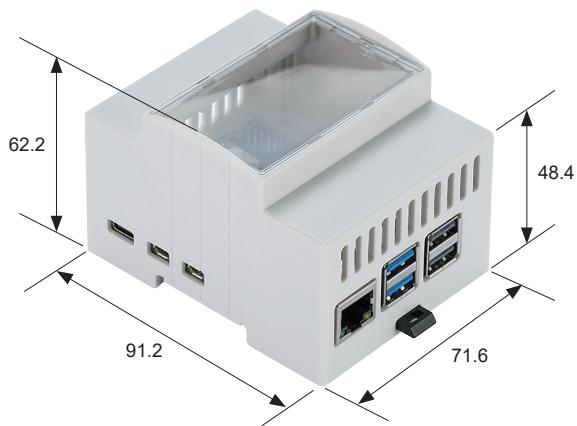




Product no. / Details

Product no.	Weight (g)
RPDM-5	63.7

Accessories (Optional parts)



DIN RAIL
FDR series
See page FDR-1 ~ FDR-2

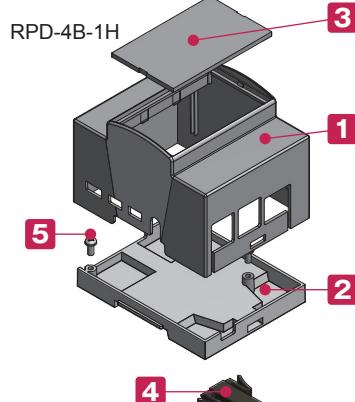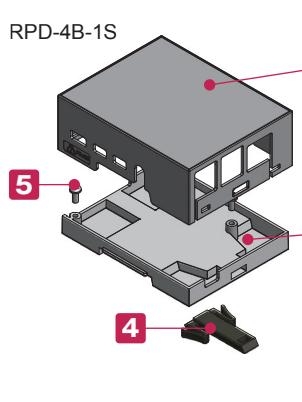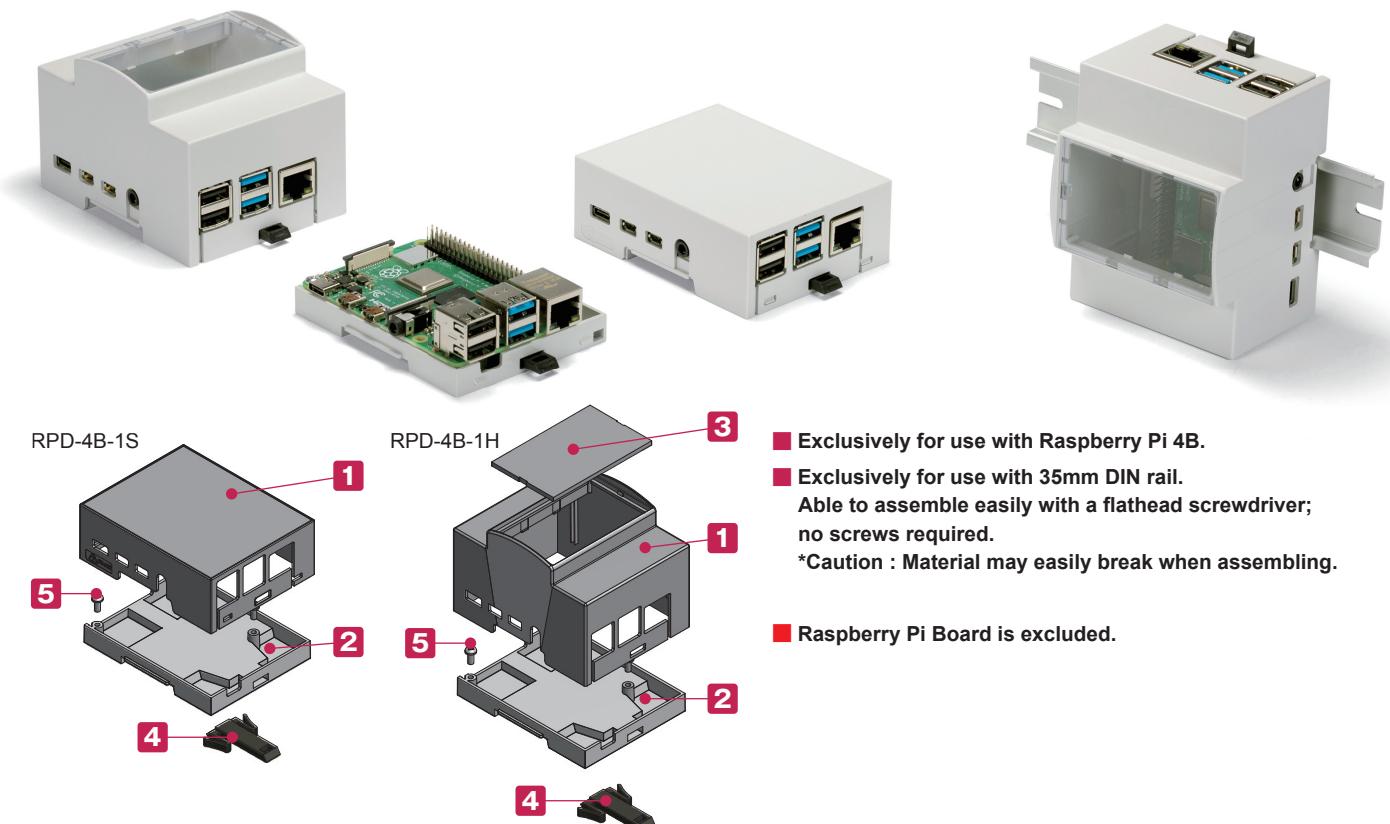

- Exclusively for use with Raspberry Pi 4B.
- Exclusively for use with 35mm DIN rail.
Able to assemble easily with a flathead screwdriver;
no screws required.
*Caution : Material may easily break when assembling.



- Raspberry Pi Board is excluded.

Components

No.	Part name	Pcs	Material	Color / Finish
1	Body	1	PC + ABS	Gray
2	Base	1	PC + ABS	Gray
3	Front panel (RPD-4B-1H only)	1	Polycarbonate t = 2.0	Transparent
4	Hook	1	PPO	Black
5	Screw for Board (M3-6)	2	Stainless steel	Unfinished

RPD dimensions

■ Drawings below are reference examples only.
DXF/DWG/PDF drawings available on our website.

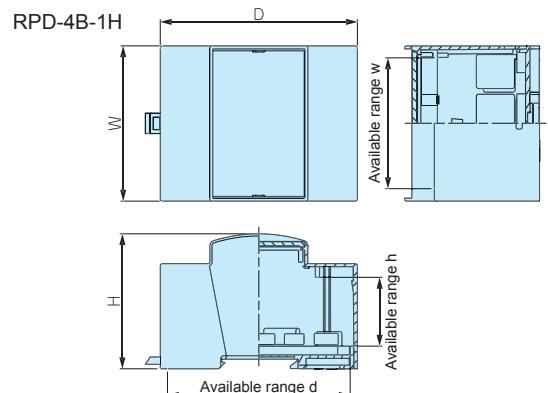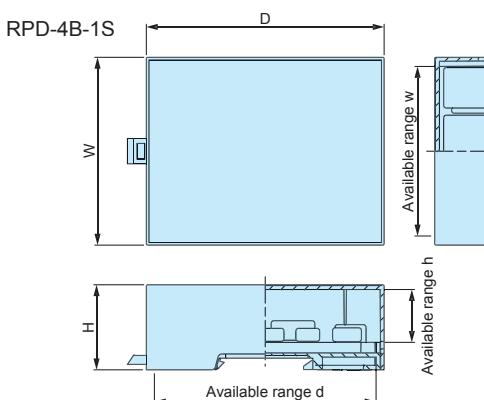

Product no. / Dimensions

Product no.	Dimensions						Weight (g)
	W	H	D	w	h	d	
RPD-4B-1S	71.1	32.2	90	64.1	20.1	83.9	46.8
RPD-4B-1H	71.3	62	90.5	60.3	31.7	83.9	68.1


TAKACHI ELECTRONICS ENCLOSURE CO., LTD.

3-21-16 Higashi-ryoke,
Kawaguchi, Saitama 332-0003, JAPAN
Tel. +81-48-222-5409

www.takachi-enclosure.com
sales@takachi-el.co.jp

■ All items listed in this catalogue are compliant with EU RoHS 10 standard.

RPF-5 Raspberry Pi 5 HEATSINK CASE with COOLING FAN

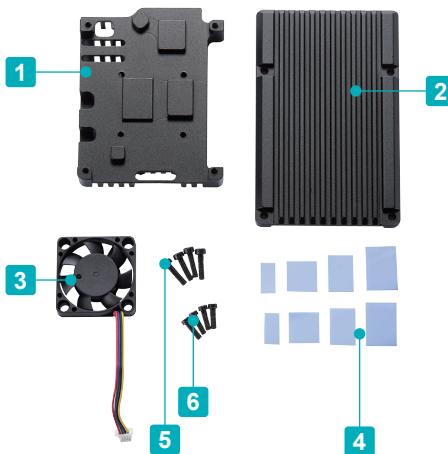


- Heatsink case with cooling fan for Raspberry Pi 5.
- Equipped with a highly efficient heat-sink top cover and thermal conductive sheets.
- Raspberry Pi board is not included.

Components

No.	Part name	Pcs	Material	Color / Finish
1	Cover	1	Aluminium	Black / Anodized
2	Base	1	Aluminium	Black / Anodized
3	Fan	1	Plastic	Black
4	Thermal conductive sheet	8*	Silicone	Blue
5	Screw	4	Steel	Black
6	Screw for fan	4	Steel	Black

*4 out of 8 pieces are spares.

RPF-5 dimensions

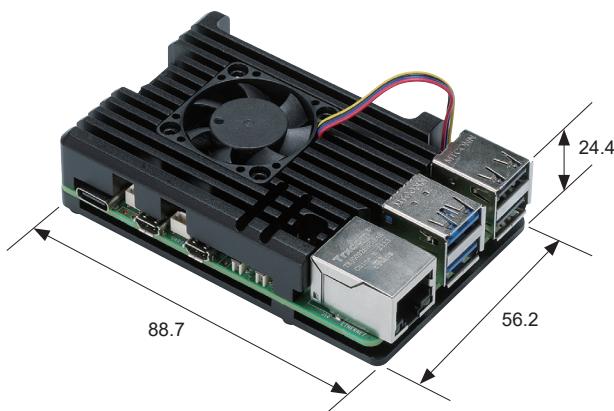


*Value above includes the dimensions of the PCB board.

Product no. / Details

Product no.	Weight (g)
RPF-5	102.4

Where to paste the thermal conductive sheets.

Cut ① to half before using.



4 spare sheets included.

