


SLM SERIES

IP65 WALL MOUNT STAINLESS STEEL BOX - LATCH-HINGED

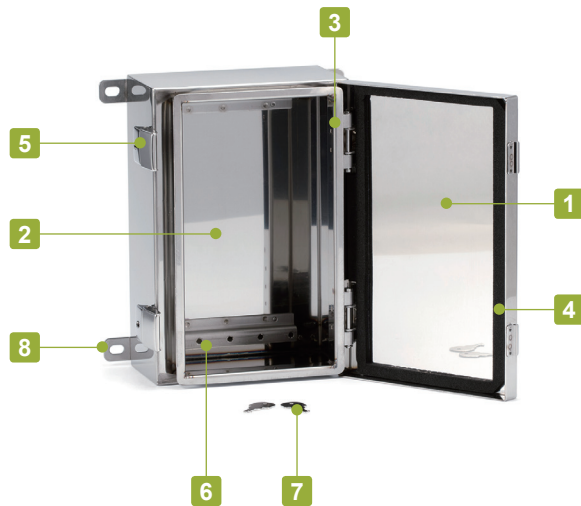

Technical Data


Protection class: IP65
Operating temperature: -40°C ~ +90°C

- IP65 wall mount enclosure with easy open/close key latch/hinge.
- Made of stainless steel (SUS304) for superior weather and corrosion resistance.
- Conductive box for EMC shielding.
- Polished finish.
- Key latch for tamper-proof resistance
- Equipped with wall mounting brackets.

Components

No.	Part name	Pcs	Material	Color / Finish
1	Cover	1	Stainless steel SUS304 t = 1.2	Polished finish
2	Body	1	Stainless steel SUS304 t = 1.2	Polished finish
3	Hinge	2	Stainless steel SUS304 t = 1.2	Barrel finish
4	Gasket	1	EPDM	Black
5	Latch (with key)	2	Stainless steel SUS304 t = 1.2	Barrel finish
6	Z-Mounting bracket	2	Stainless steel SUS304 t = 1.5	Unfinished
7	Key	2	Steel SPCC	Nickel plated
8	Wall mount bracket	4	Stainless steel SUS304 t = 2.0	Barrel finish

Accessories (Optional parts)



Mounting plate SSC series
See page SSC • FDR-1



DIN-Rail FDR series
See page SSC • FDR-1





Replacement gasket SSM-G series
See page SSM-G • SSB-G-1



Cable gland
See cable gland pages

SLM dimensions

■ Drawings below are reference examples only.
DXF/DWG/PDF drawings available on our website.

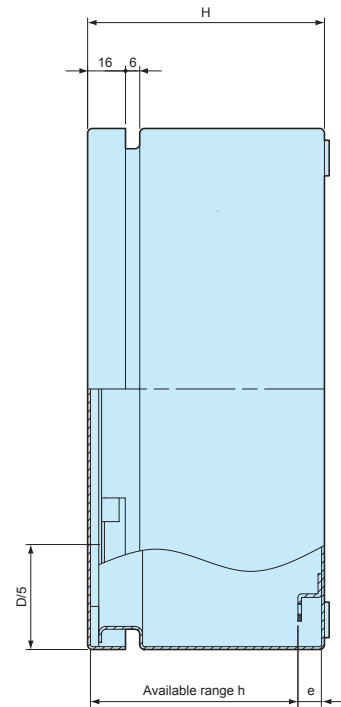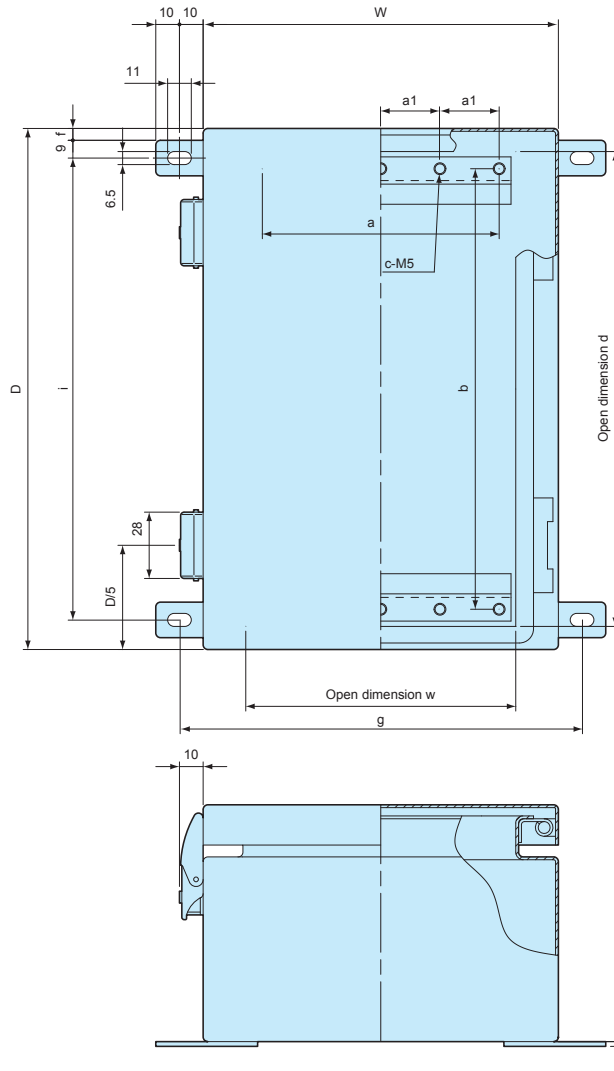

■ Wall mounting brackets are welded on.

Product no. / Dimensions

Product no.	W	D	H	w	d	h	a	a1	b	c	e	f	g	i	Weight (kg)
SLM121508	120	150	80.5	84	130.5	68.1	66	33	116	6	10	3.5	140	125	1.0
SLM151508	150	150	80.5	114	130.5	68.1	96	24	116	10	10	3.5	170	125	1.2
SLM152206	150	220	60.5	114	200.5	51.6	96	24	186	10	6.5	3.5	170	195	1.4
SLM152210	150	220	100.5	114	200.5	88.1	96	24	186	10	10	3.5	170	195	1.7
SLM202010	200	200	100.5	164	180.5	88.1	146	36.5	166	10	10	3.5	220	175	1.9
SLM202806	200	280	60.5	164	260.5	51.6	146	36.5	246	10	6.5	3.5	220	255	2.0
SLM202812	200	280	120.5	164	260.5	108.1	146	36.5	246	10	10	3.5	220	255	2.6
SLM223312	220	330	120.5	184	310.5	108.1	166	41.5	296	10	10	5	240	302	3.1
SLM304015	300	400	150.5	264	380.5	138.1	246	61.5	366	10	10	5	320	372	4.9

SSM SERIES

IP65 STAINLESS STEEL BOX - LATCH-HINGED TYPE



Technical Data


Protection class: IP65
Operating temperature: -40°C ~ +90°C

- IP65 enclosure with easy open/close key latch/hinge.
- Made of stainless steel (SUS304) for superior weather and corrosion resistance.
- Conductive box for EMC shielding.
- Polished finish.
- Key latch for tamper-proof purposes.

Components

No.	Part name	Pcs	Material	Color / Finish
1	Cover	1	Stainless steel SUS304 t = 1.2	Polished finish
2	Body	1	Stainless steel SUS304 t = 1.2	Polished finish
3	Hinge	2	Stainless steel SUS304 t = 1.2	Barrel finish
4	Gasket	1	EPDM	Black
5	Latch (with key)	2	Stainless steel SUS304 t = 1.2	Barrel finish
6	Z-Mounting bracket	2	Stainless steel SUS304 t = 1.5	Unfinished
7	Key	2	Steel SPCC	Nickel plated

Accessories (Optional parts)




Mounting plate SSC series
See page SSC • FDR-1



Cable gland
See cable gland pages




Pole mounting belt PKB series
See page PKB-1



Pole mounting bracket SSK series
See page SSK-M-1 ~ SSK-M-3

SSM dimensions

■ Drawings below are reference examples only.
DXF/DWG/PDF drawings available on our website.

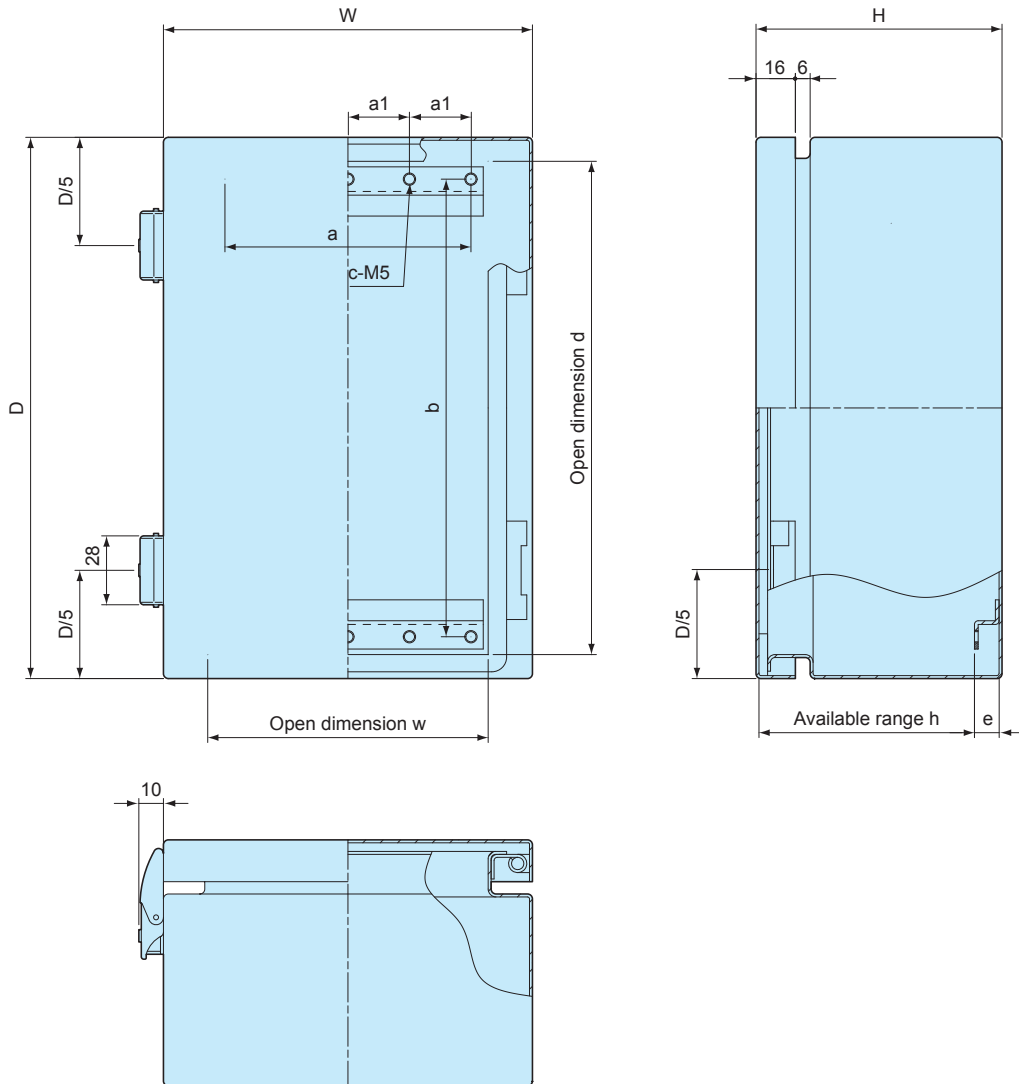



Product no. / Dimensions

Product no.	W	D	H	w	d	h	a	a1	b	c	e	Weight (kg)
SSM121508	120	150	80.5	84	130.5	68.1	66	33	116	6	10	1.0
SSM151508	150	150	80.5	114	130.5	68.1	96	24	116	10	10	1.2
SSM152206	150	220	60.5	114	200.5	51.6	96	24	186	10	6.5	1.4
SSM152210	150	220	100.5	114	200.5	88.1	96	24	186	10	10	1.7
SSM202010	200	200	100.5	164	180.5	88.1	146	36.5	166	10	10	1.9
SSM202806	200	280	60.5	164	260.5	51.6	146	36.5	246	10	6.5	2.0
SSM202812	200	280	120.5	164	260.5	108.1	146	36.5	246	10	10	2.6
SSM223312	220	330	120.5	184	310.5	108.1	166	41.5	296	10	10	3.0
SSM304015	300	400	150.5	264	380.5	138.1	246	61.5	366	10	10	4.8

SSC SERIES

MOUNTING PLATE for SSM • SLM • SSB • SLB

■ DXF/DWG/PDF drawings available on our website.

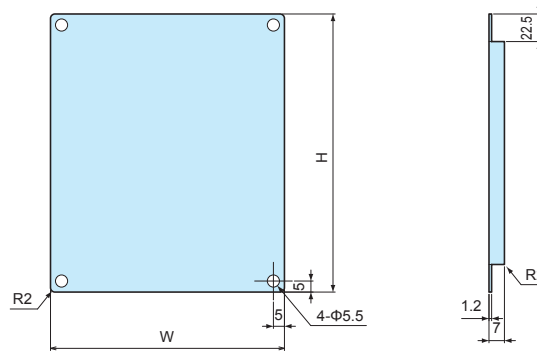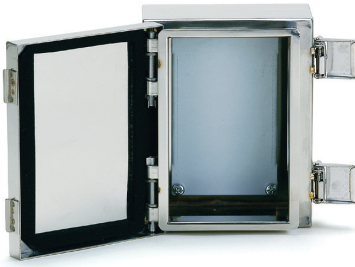

Product no. / Dimensions

Product no.	W	H	Suitable box
SSC1215	76	126	SSM • SLM • SSB • SLB 1215
SSC1515	106	126	SSM • SLM • SSB • SLB 1515
SSC1522	106	196	SSM • SLM • SSB • SLB 1522
SSC2020	156	176	SSM • SLM • SSB • SLB 2020
SSC2028	156	256	SSM • SLM • SSB • SLB 2028
SSC2233	176	306	SSM • SLM • SSB • SLB 2233
SSC3040	256	376	SSM • SLM • SSB • SLB 3040

■ Material / Finish : Steel SECC t = 1.2 / Zinc coated Included screws : M4-8 Pan head with spring washer / Trivalent chromate x 4 pcs

FDR SERIES


DIN-RAIL



Product no. / Dimensions


Product no.	L	Suitable box
FDR-B126	126	SSM • SLM • SSB • SLB 1215 / 1515
FDR-B176	176	SSM • SLM • SSB • SLB 2020
FDR-B196	196	SSM • SLM • SSB • SLB 1522
FDR-B256	256	SSM • SLM • SSB • SLB 2028
FDR-B303	303	SSM • SLM • SSB • SLB 2233
FDR-B376	376	SSM • SLM • SSB • SLB 3040

■ Material / Finish : Extruded aluminium A6063S-T5 / Silver anodized

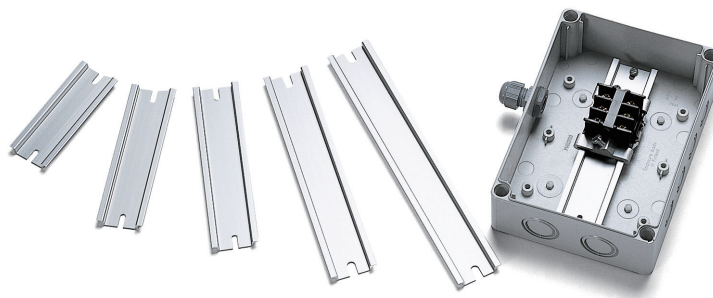FDR series**DIN RAIL**

Application example

- DIN Rail for installation of terminals, relays, or switches inside enclosures.
- Suitable for DIN Rail types of various manufacturers.

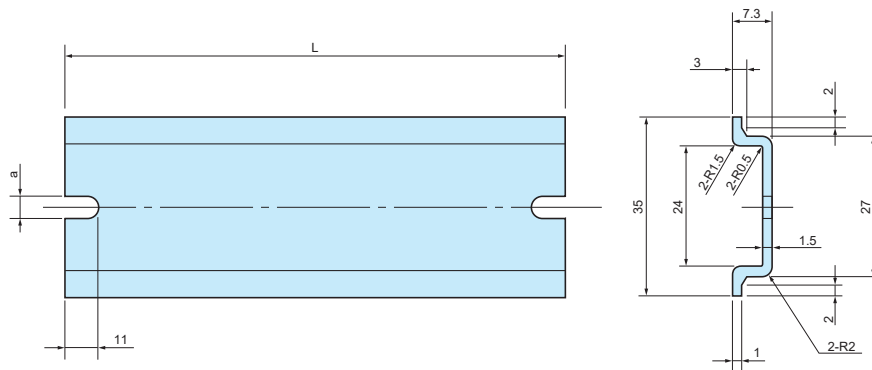**Product no. / Details**

Product no.	L	a	Matching boss pitch	Weight
FDR- 50	50	4.2	32 ~ 42	8.6
FDR- 57	57	4.2	39 ~ 49	9.5
FDR- 66	66	4.2	48 ~ 58	10
FDR- 77	77	4.2	59 ~ 69	12
FDR- 80	80	4.2	62 ~ 72	13
FDR- 87	87	4.2	69 ~ 79	14
FDR- 92	92	4.2	74 ~ 84	15
FDR-100	100	4.2	82 ~ 92	17.8
FDR-106	106	4.2	88 ~ 98	19
FDR-110	110	4.2	92 ~ 102	20
FDR-120	120	4.2	102 ~ 112	21
FDR-128	128	4.2	110 ~ 120	23
FDR-137	137	4.2	119 ~ 129	24
FDR-142	142	4.2	124 ~ 134	25
FDR-146	146	4.2	128 ~ 138	26
FDR-150	150	4.2	132 ~ 142	25.8
FDR-168	168	4.2	150 ~ 160	30
FDR-170	170	4.2	152 ~ 162	30
FDR-186	186	4.2	168 ~ 178	32
FDR-202	202	4.2	184 ~ 194	37
FDR-205	205	4.2	187 ~ 197	36
FDR-223	223	4.2	205 ~ 215	39.3
FDR-226	226	4.2	208 ~ 218	39
FDR-235	235	4.2	217 ~ 227	42
FDR-242	242	4.2	224 ~ 234	43
FDR-249	249	4.2	231 ~ 241	43
FDR-283	283	4.2	265 ~ 275	49
FDR-300	300	4.2	282 ~ 292	52
NEW FDR-314	314	4.2	296 ~ 306	51.5
FDR-350	350	4.2	332 ~ 342	60
FDR-400	400	4.2	382 ~ 392	69
FDR-450	450	4.2	432 ~ 442	78
FDR-550	550	4.2	532 ~ 542	94

Product no.	L	a	Matching boss pitch	Weight
NEW FDR-B106	106	6.5	90 ~ 96	17.5
FDR-B124	124	6.5	108 ~ 114	21.4
FDR-B142	142	6.5	126 ~ 132	24
FDR-B160	160	6.5	144 ~ 150	28
FDR-B165	165	6.5	149 ~ 155	28
FDR-B176	176	6.5	160 ~ 166	30
FDR-B183	183	6.5	167 ~ 173	30
FDR-B196	196	6.5	180 ~ 186	33
FDR-B223	223	6.5	207 ~ 213	37
FDR-B256	256	6.5	240 ~ 246	43
FDR-B260	260	6.5	244 ~ 250	45
NEW FDR-B276	276	6.5	260 ~ 266	47.5
FDR-B303	303	6.5	287 ~ 293	52
NEW FDR-B327	327	6.5	311 ~ 317	56.2
FDR-B338	338	6.5	322 ~ 328	57
FDR-B360	360	6.5	344 ~ 350	63
FDR-B376	376	6.5	360 ~ 366	64
FDR-B383	383	6.5	367 ~ 373	65
FDR-B463	463	6.5	447 ~ 453	87
FDR-1000	1,000	—	—	169.5

- Material / Finish: A6063S-T5 / Silver anodized
- FDR-1000 does not have mounting holes.


SSM-G SERIES**GASKET for SSM • SLM**

■ DXF/DWG/PDF drawings available on our website.

Product no. / Dimensions

Product no.	Suitable box
SSM-G1215	SSM • SLM 1215
SSM-G1515	SSM • SLM 1515
SSM-G1522	SSM • SLM 1522
SSM-G2020	SSM • SLM 2020
SSM-G2028	SSM • SLM 2028
SSM-G2233	SSM • SLM 2233
SSM-G3040	SSM • SLM 3040

■ Material : EPDM t = 5.0


SSB-G SERIES**GASKET for SSB • SLB**

■ DXF/DWG/PDF drawings available on our website.

Product no. / Dimensions

Product no.	Suitable box
SSB-G1215	SSB • SLB 1215
SSB-G1515	SSB • SLB 1515
SSB-G1522	SSB • SLB 1522
SSB-G2020	SSB • SLB 2020
SSB-G2028	SSB • SLB 2028
SSB-G2233	SSB • SLB 2233
SSB-G3040	SSB • SLB 3040


■ Material : EPDM t = 5.0

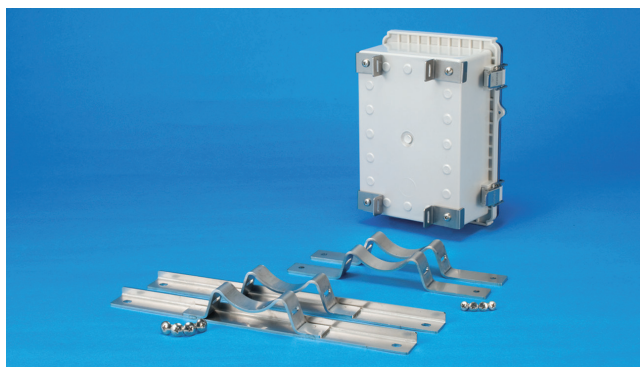SSK series**POLE MOUNTING BRACKET for BCAP • BCAR • BCPC • BCPK • BCPR**

- Stainless steel pole mounting bracket for BCAP • BCAR • BCPC • BCPK • BCPR series.
- No hole milling is required for maintaining the IP rating of the boxes.
- SSK-P models come with plastic brackets.

SSK dimensions

■ DXF/DWG/PDF drawings available on our website.

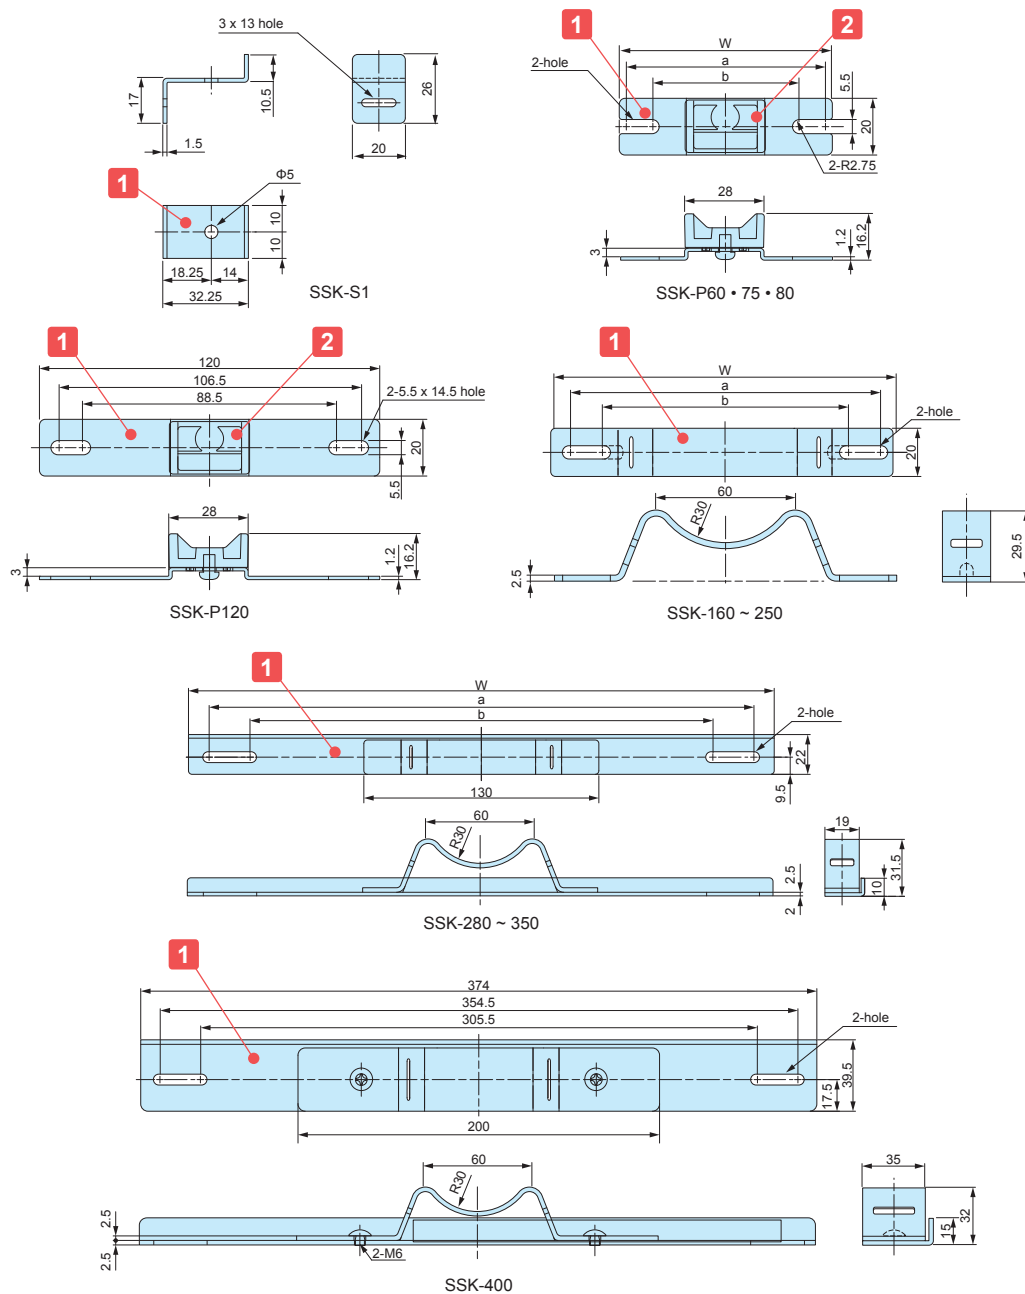**APPLICATION EXAMPLE****Weather Station Data Logger**


Product by Sakaki (Japan)

**Water Level Detector**

Product by Aspect System (Japan)



Accessories (Optional parts)

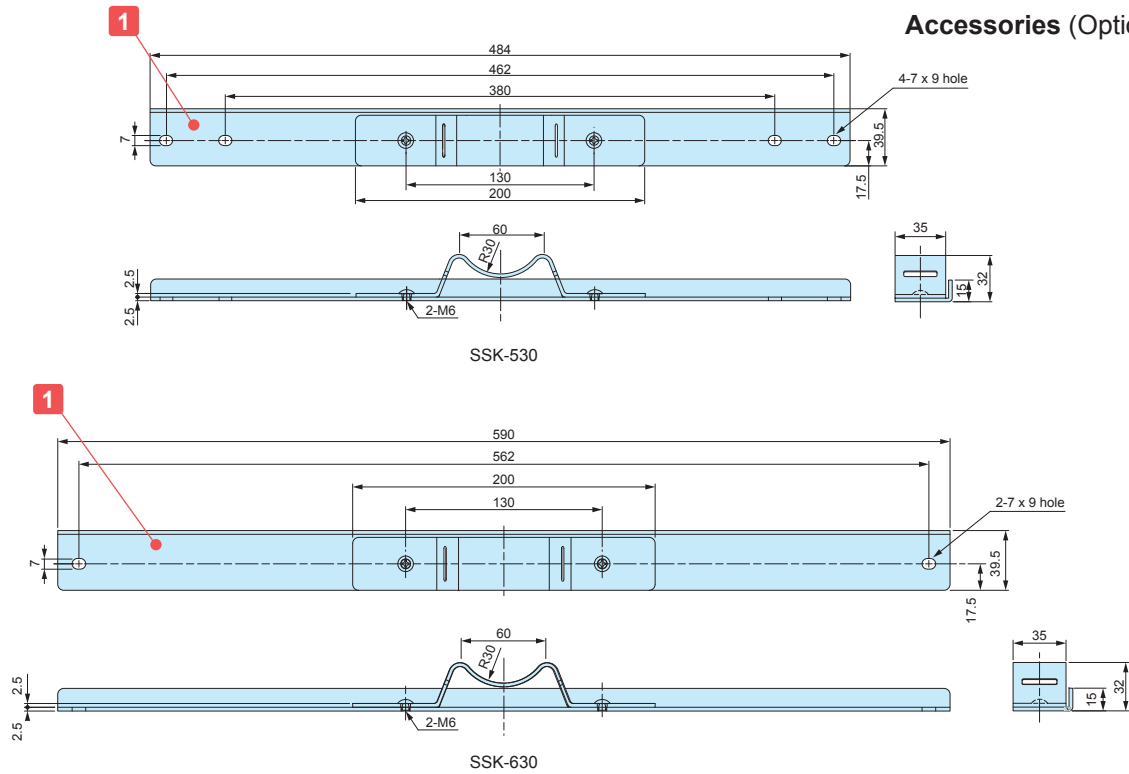

■ DXF/DWG/PDF drawings available on our website.

Components

No.	Part name	Pcs	Material	Color / Finish
1	Mounting bracket	2 / 4	Stainless steel SUS304	Barrel finish
2	Plastic bracket (SSK-P only)	2	ASA UL94HB	White gray
-	Screw	4	Stainless steel	Unfinished

Product no. / Dimensions

Product no.	W	a	b	Suitable models BCAP • BCAR • BCPC • BCPK • BCPR	Belt to use with	Pack of
SSK-S1	32.25	18.25	14	0912, 1015, 1121, 1126, 1315, 1318, 1621, 1626, 1722, 1727, 2121	PKB10PM, 10P, PKB10S, SNB series	4
SSK-P60	60	54.5	47.5	0912	PKB10PM, 10P, PKB10S	2
SSK-P75	75	69.5	55.5	1015	PKB10PM, 10P, PKB10S	2
SSK-P80	80	74.5	64.5	1121, 1126	PKB10PM, 10P, PKB10S	2
SSK-P120	120	106.5	88.5	1315, 1318	PKB10PM, 10P, PKB10S	2
SSK-160	142	129.5	106.5	1515, 1621, 1626	PKB10PM, 10P, PKB10S, SNB series	2
SSK-170	152	142.3	101	1722, 1727	PKB10PM, 10P, PKB10S, SNB series	2
SSK-200	174	161.5	112.5	1928, 2030	PKB10PM, 10P, PKB10S, SNB series	2
SSK-210	192	180.5	131.5	2121	PKB10PM, 10P, PKB10S, SNB series	2
SSK-250	230	215.5	166.5	2535	PKB10PM, 10P, PKB10S, SNB series	2
SSK-280	260	244.5	195.5	2828, 2838	PKB10PM, 10P, PKB10S, SNB series	2
SSK-300	280	264.5	215.5	3030, 3040	PKB10PM, 10P, PKB10S, SNB series	2
SSK-350	324	302.5	253.5	3535, 3545	PKB10PM, 10P, PKB10S, SNB series	2
SSK-400	374	354.5	305.5	4050, 4060	PKB20S, SNB series	2
SSK-530	484	462	380	5060, 5070	PKB20S, SNB series	2
SSK-630	590	562	-	6080	PKB20S, SNB series	2



SNB series



PKB-10PM, 10P



PKB-10S, 20S

■ Pole mounting strap and belt, SNB and PKB series are sold separately. See page 323 ~ 324 for further details.

SSK SERIES

POLE MOUNTING BRACKET




- Stainless steel pole mounting bracket for SPCM • SPCP and BCAL • BCAS series.
- Easy pole mount with the use of SSK-B mounting screw and PKB mounting belt.
- DXF/DWG/PDF drawings available on our website.
- SSK-P models includes plastic mounting brackets.




PKB series


SSK dimensions

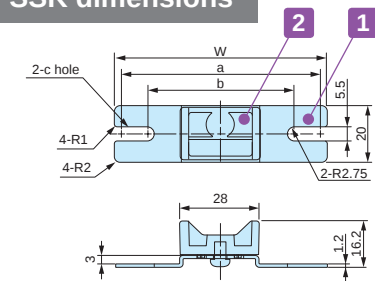


SSK-P50 • 60 • 75 • 80

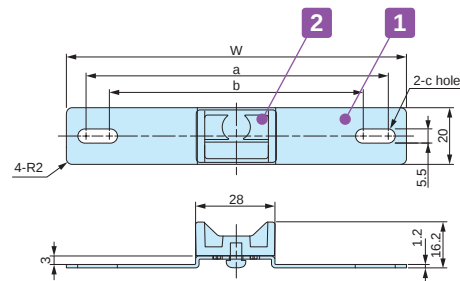


SSK-P100 • 120

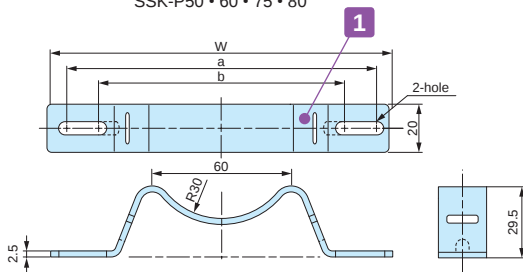


SSK-160 ~ 250

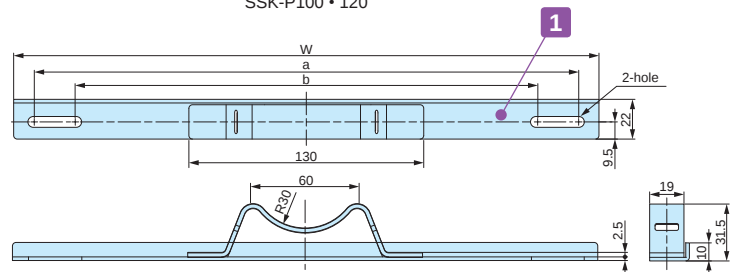

SSK-280 ~ 350

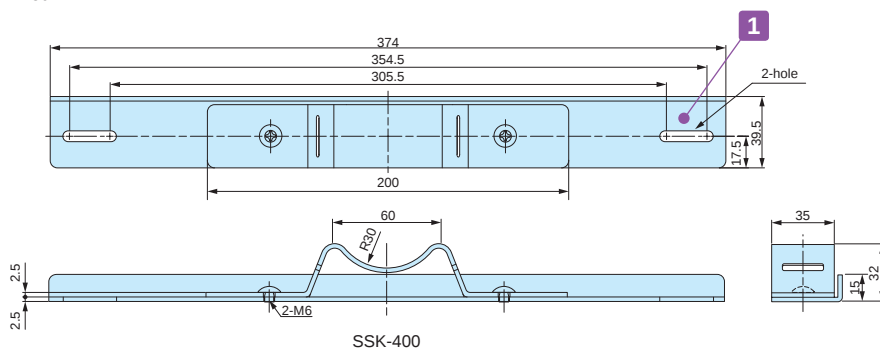

SSK-400

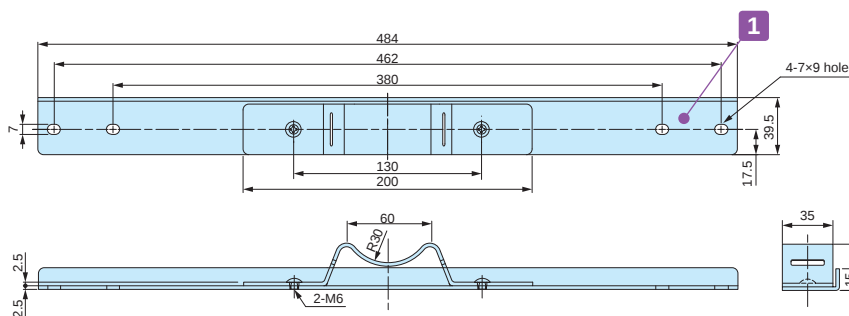

SSK-530

Components

No.	Part name	Pcs	Material	Color / Finish
1	Bracket	2	Stainless steel SUS304	Barrel finish
2	Plastic bracket (SSK-P models only)	2	ASA UL94HB	White gray

■ Screws included with SSK brackets are for BCAP • BCAR • BCPK • BCPR series use only. For other series, please utilize SSK-B screw set.

Product no. / Dimensions

Product no.	W	a	b	c	Suitable mounting belt	Pack of
SSK-P50	50	44.5	37.5	5.5× 9	PKB-10PM, 10P PKB-10S	2
SSK-P60	60	54.5	47.5	5.5× 9	PKB-10PM, 10P PKB-10S	2
SSK-P75	75	69.5	55.5	5.5×12.5	PKB-10PM, 10P PKB-10S	2
SSK-P80	80	74.5	64.5	5.5×10.5	PKB-10PM, 10P PKB-10S	2
SSK-P100	100	88.1	76.5	5.5×11.3	PKB-10PM, 10P PKB-10S	2
SSK-P120	120	106.5	88.5	5.5×14.5	PKB-10PM, 10P PKB-10S	2
SSK-160	142	129.5	106.5	—	PKB-10PM, 10P PKB-10S	2
SSK-170	152	142.3	101	—	PKB-10PM, 10P PKB-10S	2
SSK-200	174	161.5	112.5	—	PKB-10PM, 10P PKB-10S	2
SSK-210	192	180.5	131.5	—	PKB-10PM, 10P PKB-10S	2
SSK-250	230	215.5	166.5	—	PKB-10PM, 10P PKB-10S	2
SSK-280	260	244.5	195.5	—	PKB-10PM, 10P PKB-10S	2
SSK-300	280	264.5	215.5	—	PKB-10PM, 10P PKB-10S	2
SSK-350	324	302.5	253.5	—	PKB-10PM, 10P PKB-10S	2
SSK-400	374	354.5	305.5	—	PKB-20S	2
SSK-530	484	462	380	7×9	PKB-20S	2

SSK-B SERIES

MOUNTING SCREW SET for SSK




- Mounting screw set for use with SSK pole mounting bracket.
- See chart on page SSK-3 for appropriate bracket/screw/box combination.
- Material / Finish : Stainless steel / Unfinished.

Product no. / Dimensions

Product no.	Included screws	Suitable box	Pcs
SSK-B4-15N	M4-15 Pan head with nut	BCAS060905 ~ 212310	4
SSK-B4-25N	M4-25 Pan head with nut	SPCP • SPCM series	4
SSK-B5-10	M5-10 Pan head	BCAL series	4


■ Installation Example

BCAS050604, 050605



Use screws included with SSK-P


M4 / M5 Pan head with nut fastening

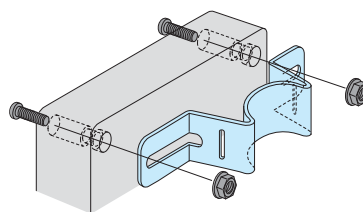

SSK-B4-15N

SSK-B4-25N

Pan head screw into insert nut



SSK-B5-10

POLE MOUNTING BRACKET / SCREW SET MATCHING CHART

SPCM • SPCP series

Box Product no.		SSK Product no.		Screw set Product no.
		Vertical mount	Horizontal mount	
SPCP SPCM	081304, 081305 081306, 081308 081310, 081313	SSK-P75	SSK-160	SSK-B4-25N
	101004, 101006	SSK-P100	SSK-P100	SSK-B4-25N
	131304, 131305 131306, 131308 131310, 131313	SSK-160	SSK-160	SSK-B4-25N
	131804, 131805 131806, 131808 131810, 131813, 131815	SSK-160	SSK-200	SSK-B4-25N
	181808, 181810 181813, 181815	SSK-200	SSK-200	SSK-B4-25N
	182508, 182510, 182515	SSK-200	SSK-280	SSK-B4-25N

BCAL series

Box Product no.		SSK Product no.		Screw set Product no.
		Vertical mount	Horizontal mount	
BCAL	191913 ※	SSK-P120	SSK-200	SSK-B5-10
	192813, 192818	SSK-200	SSK-250	SSK-B5-10
	193813, 193818	SSK-200	SSK-350	SSK-B5-10
	282813	SSK-250	SSK-280	SSK-B5-10
	283413	SSK-280	SSK-280	SSK-B5-10
	283813, 283818	SSK-280	SSK-350	SSK-B5-10
	285613	SSK-280	SSK-530	SSK-B5-10
	385618	SSK-400	SSK-530	SSK-B5-10


※Use screws included with SSK bracket for vertical mount

BCAS series

Box Product no.		SSK Product no.		Screw set Product no.
		Vertical mount	Horizontal mount	
BCAS	050604, 050605	SSK-P50	SSK-P60	Use screws included with SSK bracket
	060905	SSK-P60	SSK-P100	SSK-B4-15N
	071005 ※	SSK-P75	SSK-P100	SSK-B4-15N
	080806	SSK-P75	SSK-P75	SSK-B4-15N
	081104, 081107 081108, 081110	SSK-P75	SSK-P120	SSK-B4-15N
	081307, 081308	SSK-P75	SSK-160	SSK-B4-15N
	081807, 081808	SSK-P75	SSK-210	SSK-B4-15N
	082507, 082508	SSK-P75	SSK-280	SSK-B4-15N
	101007, 101010	SSK-P100	SSK-P100	SSK-B4-15N
	101807	SSK-P100	SSK-210	SSK-B4-15N
	102007	SSK-P100	SSK-250	SSK-B4-15N
	102307	SSK-P100	SSK-250	SSK-B4-15N
	121207, 121210	SSK-P120	SSK-200	SSK-B4-15N
	141709	SSK-160	SSK-200	SSK-B4-15N
	142309	SSK-160	SSK-250	SSK-B4-15N
	151507, 151510	SSK-170	SSK-170	SSK-B4-15N
	152004, 152007 152020, 152013, 152016	SSK-170	SSK-250	SSK-B4-15N
	152510, 152513	SSK-170	SSK-280	SSK-B4-15N
	161607	SSK-170	SSK-170	SSK-B4-15N
	202010, 202013 202016, 202019	SSK-250	SSK-250	SSK-B4-15N
	212310	SSK-250	SSK-250	SSK-B4-15N

※Use screws included with SSK bracket for vertical mount


- For installation of SR series outdoor roof on SPCM • SPCP series
SR series (For SPCM • SPCP - see page SPCM • SPCM-ACC-2)

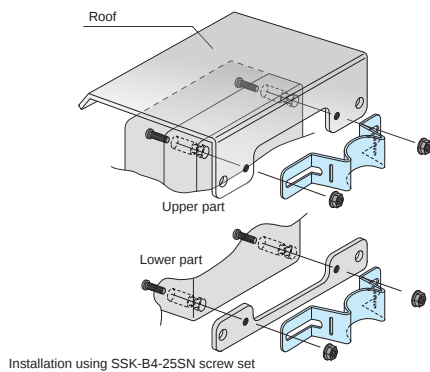

- Select SSK bracket depending on mounting type (Vertical or Horizontal).


Vertical mount

(Longer vertical side)

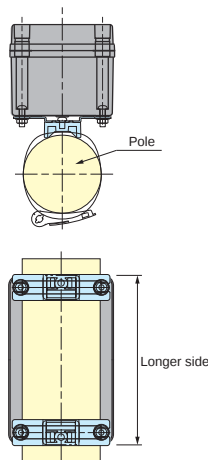


Horizontal mount

(Longer horizontal side)

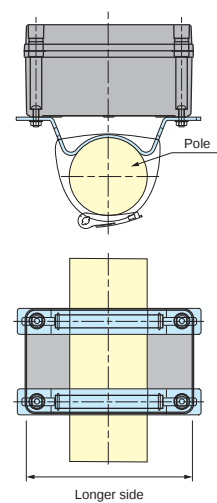

WGMB-2SW


POLE MOUNTING BRACKET

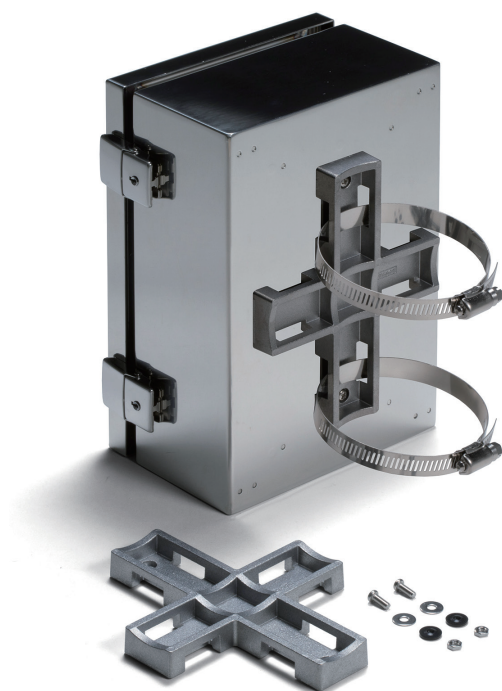


- Pole mount bracket made from robust diecast aluminium.
- Bracket can be mounted on both vertically, and horizontally.
- Sealing washers enables the installation to have a protection class equivalent to IPX7, X5.
- Hole milling on enclosures is required when installing mounting bracket.
- Pole mount is possible with the use of SNB or PKB series mounting belt. (See page 323 ~ 324)
- Installation can be done on a variety of enclosures made from plastic, diecast aluminium or stainless steel.

WGMB-2SW dimensions

■ DXF/DWG/PDF drawings available on our website.

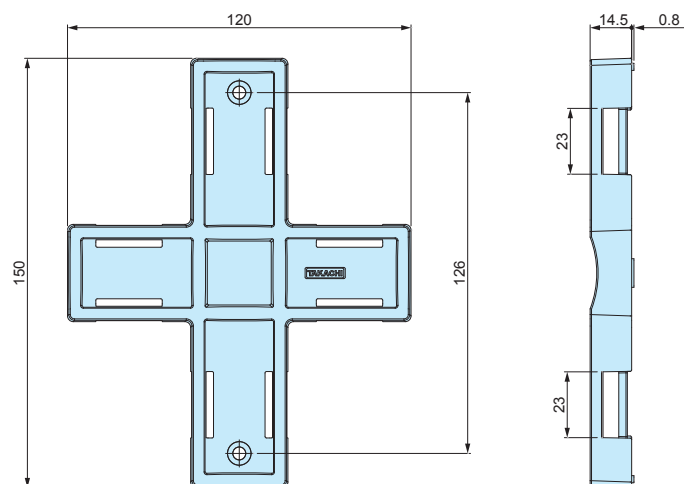

Installation example

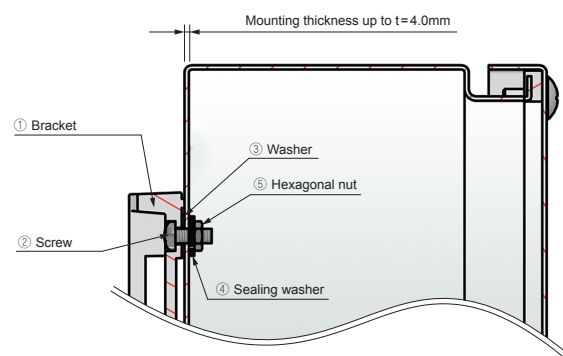


Components

No.	Part name	Pcs	Material	Color / Finish
1	Bracket	1	Diecast aluminium ADC12	Natural / Shot blast
2	Screw (Pan head M4-10)	2	Stainless steel	Unfinished
3	Washer	2	Stainless steel	Unfinished
4	Sealing washer	2	NBR, SPCC	Black
5	Hexagonal nut (M4-JIS Type3)	2	Stainless steel	Unfinished

Product no. / Details

Product no.	Mounting thickness	Recommended torque	Weight (g)
WGMB-2SW	Up to t=4.0mm	0.45N • m ~ 0.5N • m	130

■ Recommended torque listed is for reference only; actual may differ. Assemble after testing torque.

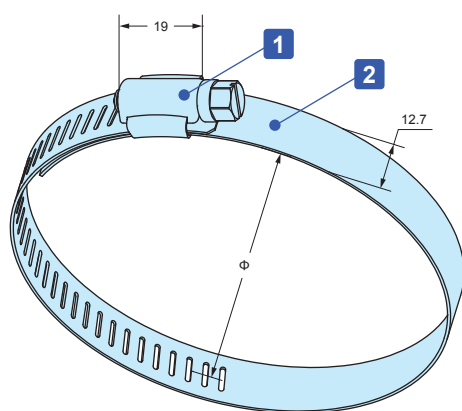SNB series**STAINLESS STEEL POLE MOUNTING STRAP****SNB dimensions**

- Corrosion resistant stainless steel (SUS304) belt clamp.
- It can be installed securely by tightening the screw.
- 8 mm nut driver (box driver) is recommended for tightening.
Flat-bladed screwdrivers can also be used.

Components

No.	Part name	Pcs	Material	Finish
1	Bracket	1	Stainless steel SUS304	Polished
2	Strap	1	Stainless steel SUS304	Polished


Product no. / Details

Product no.	Applicable diameter (Φ)	Strap width	Strap thickness	Recommended torque N · m	Weight (g)	Pack of
SNB 52- 76	52 ~ 76	12.7	0.6	0.7 ~ 1.0	27.5	1
SNB 72- 95	72 ~ 95	12.7	0.6	0.7 ~ 1.0	30	1
SNB 91-114	91 ~ 114	12.7	0.6	0.7 ~ 1.0	34.5	1
SNB105-127	105 ~ 127	12.7	0.6	0.7 ~ 1.0	37.5	1
SNB117-140	117 ~ 140	12.7	0.6	0.7 ~ 1.0	39.5	1
SNB130-153	130 ~ 153	12.7	0.6	0.7 ~ 1.0	41.5	1
SNB142-165	142 ~ 165	12.7	0.6	0.7 ~ 1.0	43.5	1
SNB155-178	155 ~ 178	12.7	0.6	0.7 ~ 1.0	46.5	1
SNB168-191	168 ~ 191	12.7	0.6	0.7 ~ 1.0	49	1
SNB181-204	181 ~ 204	12.7	0.6	0.7 ~ 1.0	51	1
SNB194-217	194 ~ 217	12.7	0.6	0.7 ~ 1.0	52.5	1
SNB207-230	207 ~ 230	12.7	0.6	0.7 ~ 1.0	57	1
SNB220-243	220 ~ 243	12.7	0.6	0.7 ~ 1.0	59.5	1
SNB233-256	233 ~ 256	12.7	0.6	0.7 ~ 1.0	62.5	1
SNB246-269	246 ~ 269	12.7	0.6	0.7 ~ 1.0	64	1
SNB259-282	259 ~ 282	12.7	0.6	0.7 ~ 1.0	67.5	1
SNB272-295	272 ~ 295	12.7	0.6	0.7 ~ 1.0	70	1
SNB285-308	285 ~ 308	12.7	0.6	0.7 ~ 1.0	71	1

■ Recommended torque listed is for reference only; actual may differ. Assemble after testing torque.

SNB Strap required

Suitable series	Suitable models						Required
SSK series	SSK-S1	SSK-160	SSK-170	SSK-200	SSK-210	SSK-250	2
	SSK-280	SSK-300	SSK-350	SSK-400	SSK-530		
WGMB series	WGMB-1W						1

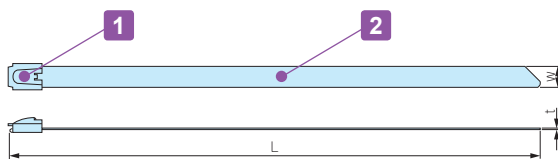SCT series**STAINLESS STEEL TIES for POLE MOUNTING**

- Corrosion resistant stainless steel (SUS304) cable tie.
- Can be used to bundle cables or mounting enclosures to poles.
- Self-locking bracket allows easy mounting / cable bundling.
- Designed for one time use only (not reusable).

- Suitable for easy mounting.
- Wear gloves or other protections while installation.

Components

No.	Part name	Pcs	Material	Finish
1	Bracket	1	Stainless steel SUS304	Polished
2	Strap	1	Stainless steel SUS304	Polished



Product no. / Details

Product no.	W	L	t	Pack of
SCT 4.6- 100	4.6	100	0.25	10
SCT 4.6- 150	4.6	150	0.25	10
SCT 4.6- 200	4.6	200	0.25	10
SCT 4.6- 300	4.6	300	0.25	10
SCT 4.6- 500	4.6	500	0.25	2
SCT 4.6-1000	4.6	1,000	0.25	2
SCT 4.6-1500	4.6	1,500	0.25	2
SCT 7.9- 100	7.9	100	0.25	10
SCT 7.9- 150	7.9	150	0.25	10
SCT 7.9- 200	7.9	200	0.25	10
SCT 7.9- 300	7.9	300	0.25	10
SCT 7.9- 500	7.9	500	0.25	2
SCT 7.9-1000	7.9	1,000	0.25	2
SCT 7.9-1500	7.9	1,500	0.25	2

G3388**TIGHTEN GUN for SCT**

- Tool for cutting and tightening stainless steel strap.

*Be careful of the sharp cut-edge of strap.



Note: Tighten gun is not subject to RoHS regulations.

Product no.

G3388

PKB series**POLE MOUNTING BELT**

PKB-10PM, 10P




PKB-10S, 20S

- Pole mounting belt for attachment of enclosures with suitable pole mount brackets or construction onto poles.
- Designed for one time use only (not reusable).
- Strong stainless steel clamping type and easy installation plastic type are available.


PKB dimensions

■ DXF/DWG/PDF drawings available on our website.


PKB-10PM, 10P

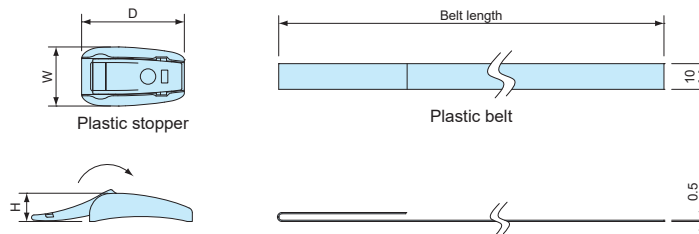

PKB-10S

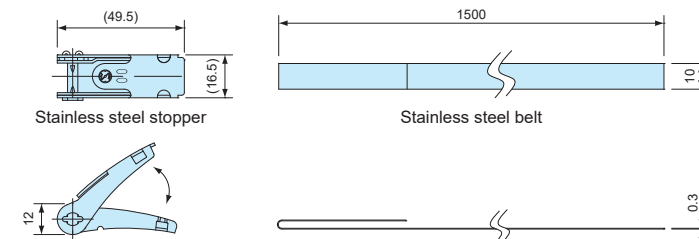

PKB-20S

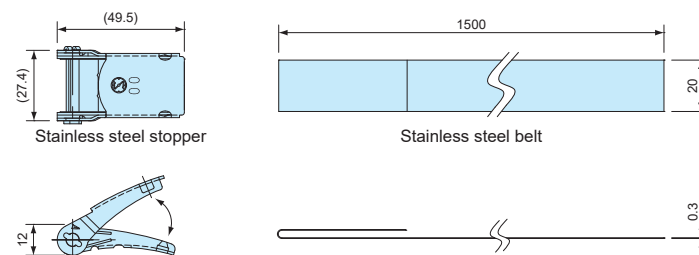**Components**


Part name	Material	Color / Finish
Stopper	Stainless steel SUS304 • POM	Barrel finish • Black
Belt	Stainless steel SUS430 • PET	Bright annealed finish • Gray

Product no. / Details

Product no.	W	D	H	Belt length	Belt material	Tensile strength (horizontal)	Weight (g)	Pack of
PKB-10PM	23	24	11	500 mm	PET	0.8kN	14	2
PKB-10P	23	40	11	1,500 mm	PET	1.3kN	31.8	2
PKB-10S	—	—	—	1,500 mm	Stainless steel SUS304	1.4kN	101.6	2
PKB-20S	—	—	—	1,500 mm	Stainless steel SUS430	2.9kN	182.2	2

PMF-12M


STAINLESS STEEL PROTECTIVE VENT

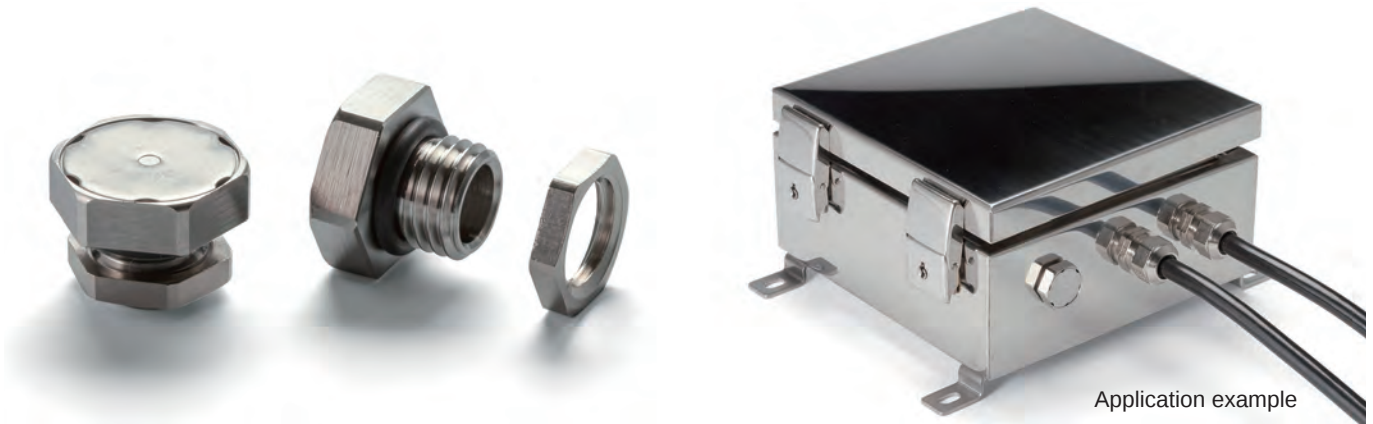


Application example

- Stainless steel protective vent for superior durability and chemical resistance.
- IP68 protection class (water depth 2 meters / 60 mins) and -40°C ~ +125°C operating temperature range allows it to be used in various environments.
- Suitable for enclosures with capacities of 20 litres or under.
- For outdoor use, installation on the side of the enclosure unit is recommended.

PMF-12M dimensions

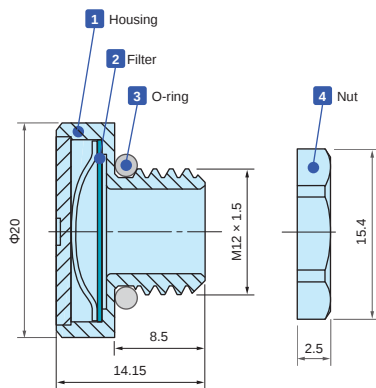


Hole milling drawings



- While $\Phi 12.2\text{mm}$ through-hole is sufficient for installation, 60° angle tapered hole is recommended to prevent deformation of the O-ring.

Installation drawings

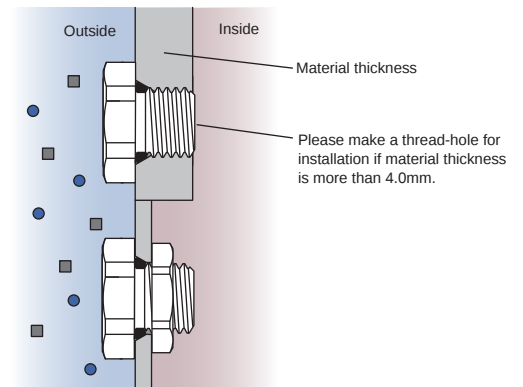

- If used with a lock nut, material thickness should not exceed 4.0mm.

Technical Data

Airflow	1600ml / min (dp = 7 kPa)
Recommended Torque	0.6 ~ 1.2 N • m
Certifications	IEC60529 (Protection class test) : IP66 • IP67 • IP68 • IP69K IEC60068-2-1, 2, 14 (Heat resistance test) : -40°C ~ +125°C IEC60068-2-78 (Humidity test) : 85°C • 85% humidity • 1000 hours IEC60068-2-64 (Vibration test)

Product no. / Details

Product no.	Material				G		Nut SW
● Metallic	1 Housing	2 Filter	3 O-ring	4 Nut	Thread size	Mount hole	
PMF-12M	Stainless steel	PTFE	Silicone	Brass • Nickel plated	M12 x 1.5	$\Phi 12.2$	14

PMF series

PROTECTIVE VENT

Pressure Equalization / Ventilation



Application Example



- Protective vent protects the enclosure from deformation by equalizing internal and external pressure differences, as well as venting the gas generated within the enclosure.
- IP68 protection class (water depth 2 meters / 60 mins) with an operating temperature range $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$ allows them to be used in harsh environments.
- PMF-12 and PMF-12HS models are suitable for up to 5 and 50 liters respectively.
- Recommended to be installed at the sides of the enclosure.
- Use in industrial and electrical / electronic products only; not suitable to be used in medical, food and beverage, and cosmetic industries and related industrial equipment.

PMF dimensions


Hole milling drawings

Installation drawings

- DXF/DWG/PDF drawings available on our website.



- Recommended for prevention of O-ring deformation during tightening.
If tightened with a lock nut, a standard through-hole is sufficient for installation.

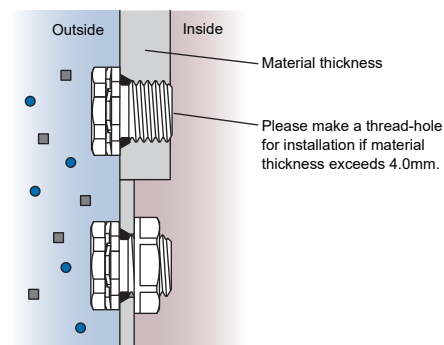

- If used with a lock nut, material thickness should not exceed 4.0mm.

Technical Data

Product no.	PMF-12	PMF-12HA
Airflow	450ml / min (dp = 7kPa)	4,000ml / min (dp = 7kPa)
Recommended torque	0.6 ~ 0.8N · m	0.6 ~ 0.8N · m
Certifications	IEC60529 (Protection class test) : IP65 • IP66 • IP67 • IP68 • IP69K IEC60068-2-1, 2, 14 (Heat resistance test) : - 40°C ~ +125°C IEC60068-2-78 (Humidity test) : 85°C • 85% humidity • 1,000 hours IEC60068-2-11, 52 (Salt spray test) IEC60068-2-64 (Vibration test) GR-3108-CORE (Corrosive gas test) UL94V-0 (Flame-resistant) • UL746C f1	

Product no. / Details

Product no.		Material				G		Lock nut
● Light gray	● Black	1 Housing	2 Filter	3 O-ring	4 Lock nut	Thread size	Mount hole	SW
PMF-12S	PMF-12B	PA66 / 6	PTFE	Silicone	PA66 (UL94V-2)	M12 x P1.5	Φ12.2	17
PMF-12HAS	PMF-12HAB	PA66 / 6	PTFE	Silicone	PA66 (UL94V-2)	M12 x P1.5	Φ12.2	17

PMF-32S

LARGE PROTECTIVE VENT

Pressure Equalization / Ventilation




Application Example


- Maintains exceptionally high airflow in extra-large enclosures with volumes of up to 200 liters in an outdoor environment.
- Protective vent protects the enclosure from deformation by equalizing internal and external pressure differences, as well as venting the gas generated within the enclosure.
- Simple and flat design allows it to be used on a wide variety of enclosure types.
- IP68 protection class rated (water depth 2 meters / 60 mins) with an operating temperature range of $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$ allows it to be used in harsh environments.
- Compliant with Solar industry testing IEC62108 standards.
- Recommended to be installed at the sides of the enclosure.
- Use in industrial and electrical / electronic products only; not suitable to be used in medical, food and beverage, and cosmetic industries and related industrial equipment.

■ DXF/DWG/PDF drawings available on our website.


PMF-32 dimensions

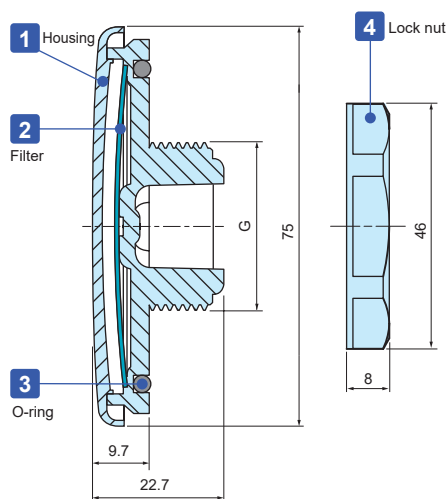

Hole milling drawings

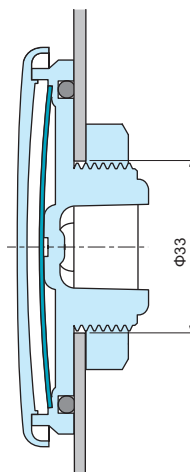

Installation drawings

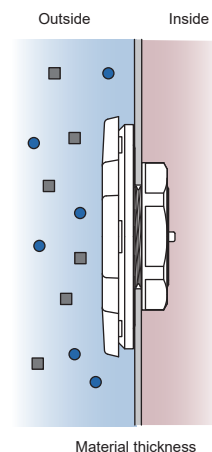

■ If used with a lock nut, material thickness should not exceed 5.0mm.

Technical Data


Airflow	16ℓ / min (dp = 1.2kPa)
Recommended torque	5 N · m
Certifications	IEC529, 2nd (Protection class test) : IP66 • IP67 • IP68 • IP69K IEC60068-2-1, 2, 14 (Heat resistance test) : $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$ IEC60068-2-78 (Humidity test) : 85°C • 85% humidity • 1,000 hours IEC60068-2-11, 52 (Salt spray test) IEC60068-2-64 (Vibration test) IEC62108, 10.8 • 9 (Solar industry test) : Freezing • High temperature tes • Hail impact test GR-3108-CORE (Corrosive gas test) UL94V-0 (Flame-resistant) • UL746C f1

Product no. / Details

Product no.	Material				G			Lock nut SW
	1 Housing	2 Filter	3 O-ring	4 Lock nut	Thread size	Thread diameter	Mount hole	
PMF-32S	Polycarbonate	PTFE	Silicone	PA66	M32 x P1.5	Φ32	Φ33	41.5

RB-9

RUBBER BUSH

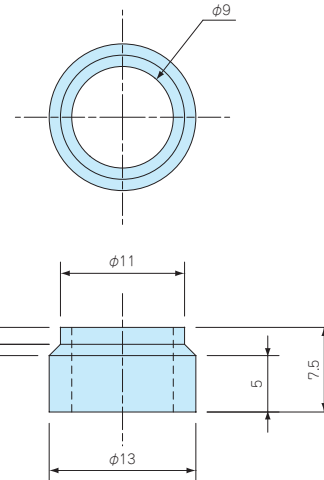



- Rubber bush for TMC series terminal junction box.
- Applicable for $\phi 8 \sim \phi 9$ mm diameter cable.

Product no. / Details

Product no.	Material	Color	Cable range	Pack of
RB-9	NBR	Black	$\phi 8 \sim \phi 9$ mm	2

SZ series

WATERPROOF WASHER

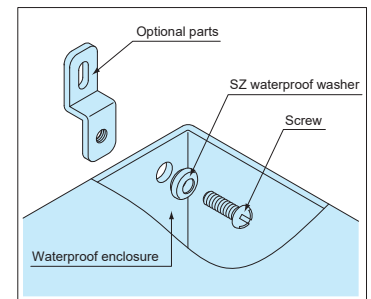

- Waterproof washer for screwing onto waterproof boxes.
- NBR sealing material has superior oil resistance (N models only).
- Silicone sealing material has wider operating temperature with superior temperature and water resistance (S models only).

Technical Data

Water pressure resistance :
M3 ~ M16
0.98MPa (10kgf/cm²) / 1 hour

- Shape of the sealing material vary by product.

Product no. / Details

Product no.	W	H	a	b	c	t	Washer material	Sealing material	Color	Screw size	Pack of
SZ- 3N	7	2.7	3.2	2.2	3.1	0.5	SUS304	NBR	Black	M 3	1
SZ- 3S	7	2.7	3.2	2.2	3.1	0.5	SUS304	Silicone	Brown	M 3	1
SZ- 4N	8	2.8	4.2	2.1	4.1	0.5	SUS304	NBR	Black	M 4	1
SZ- 4S	8	2.8	4.2	2.1	4.1	0.5	SUS304	Silicone	Brown	M 4	1
SZ- 5N	9.5	3.6	5.2	2.7	5.1	0.8	SUS304	NBR	Black	M 5	1
SZ- 5S	9.5	3.6	5.2	2.7	5.1	0.8	SUS304	Silicone	Brown	M 5	1
SZ- 6N	11.5	4	6.2	3	6.2	1	SUS304	NBR	Black	M 6	1
SZ- 6S	11.5	4	6.2	3	6.2	1	SUS304	Silicone	Brown	M 6	1
SZ- 8N	15.2	3.8	8.2	3.2	8.2	1	SUS304	NBR	Black	M 8	1
SZ- 8S	15.2	3.8	8.2	3.2	8.2	1	SUS304	Silicone	Brown	M 8	1
SZ-10N	18	5.3	10.2	4	10.2	1.5	SUS304	NBR	Black	M10	1
SZ-10S	18	5.3	10.2	4	10.2	1.5	SUS304	Silicone	Brown	M10	1
SZ-12N	24	6.1	14.2	4.8	12.2	1.5	SUS304	NBR	Black	M12	1
SZ-12S	24	6.1	14.2	4.8	12.2	1.5	SUS304	Silicone	Brown	M12	1
SZ-16N	30	6.8	18.4	5.3	16	1.9	SUS304	NBR	Black	M16	1
SZ-16S	30	6.8	18.4	5.3	16	1.9	SUS304	Silicone	Brown	M16	1
NEW SZ-3N-P	7	2.7	3.2	2.2	3.1	0.5	SUS304	NBR	Black	M 3	50
NEW SZ-3S-P	7	2.7	3.2	2.2	3.1	0.5	SUS304	Silicone	Brown	M 3	50
NEW SZ-4N-P	8	2.8	4.2	2.1	4.1	0.5	SUS304	NBR	Black	M 4	50
NEW SZ-4S-P	8	2.8	4.2	2.1	4.1	0.5	SUS304	Silicone	Brown	M 4	50
NEW SZ-5N-P	9.5	3.6	5.2	2.7	5.1	0.8	SUS304	NBR	Black	M 5	50
NEW SZ-5S-P	9.5	3.6	5.2	2.7	5.1	0.8	SUS304	Silicone	Brown	M 5	50



- Economical metal cable gland.
- Equivalent to IP67 protection class.
- Wide selection available from M12 ~ M32.

Technical Data

Protection class : Equivalent to IP67*
Operating temperature : -20°C ~ +80°C

*In-house test




Components

No.	Part name	Material	Color / Finish
1	Cap	Brass	Nickel plated
2	Sealing Insert	TPE	Black
3	Connector	Brass	Nickel plated
—	O-ring	NBR	Black
4	Lock Nut	Brass	Nickel plated

RMC dimensions

■ DXF/DWG/PDF drawings available on our website.

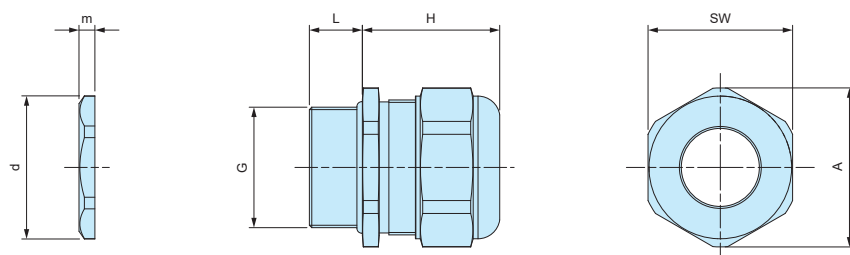

Product no. / Details

Product no.	G		Cable range		L	H Max	SW	A	d	m	Pack of
	Thread size	Mounting hole	Min	Max							
RMC12-6.5	M12×1.5	Φ12.2	5	6.5	10	18	15	16.5	15.4	2.5	1
RMC12-7.5	M12×1.5	Φ12.2	6.5	7.5	10	18	15	16.5	15.4	2.5	1
RMC16-8	M16×1.5	Φ16.2	6.5	8	10	23	18	19.7	19.7	2.8	1
RMC16-10.5	M16×1.5	Φ16.2	8	10.5	10	23	18	19.7	19.7	2.8	1
RMC20-11	M20×1.5	Φ20.2	9.5	11	10	23.5	24	26.4	24.2	3.2	1
RMC20-14.5	M20×1.5	Φ20.2	11	14.5	10	23.5	24	26.4	24.2	3.2	1
RMC25-16	M25×1.5	Φ25.2	14	16	11	28.5	30	33	29.7	3.3	1
RMC25-19	M25×1.5	Φ25.2	16	19	11	28.5	30	33	29.7	3.3	1
RMC32-21	M32×1.5	Φ32.3	18	21	13	30.5	36	39.6	37.4	3.5	1
RMC32-25.5	M32×1.5	Φ32.3	21	25.5	13	30.5	36	39.6	37.4	3.5	1

IP68



- High water protection IP68 (1bar / 30min) metal cable gland.
- Wide selection, for M6 ~ M50.
Suitable for $\Phi 2$ mm ~ $\Phi 42$ mm cable.

Technical Data



Protection class : IP68 1bar / 30min
 Operating temperature : -40°C ~ +100°C
 Compliant with EN50262 Ver. A

AGM series

Thicker sealing insert evenly hold a cable by having a larger holding area.
 Remains durable even after repeated tightening / loosening.


Lamellar insert type

If over-tightened, it can cause the rubber bush or cable to deform,
 which can allow water to seep in.

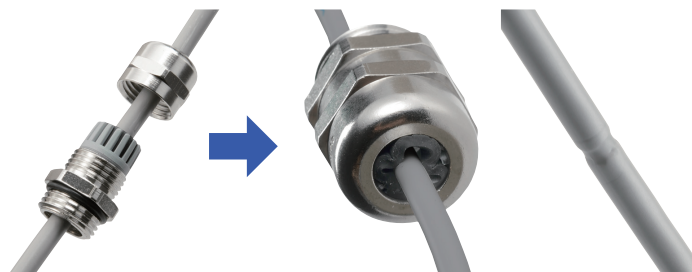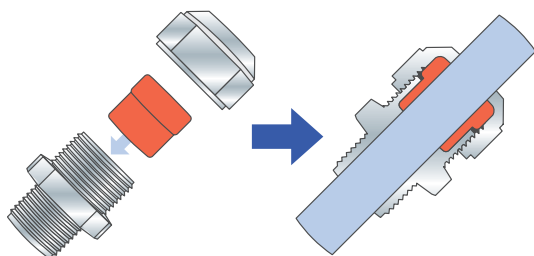

- Appropriate tightening torque varies by each cable diameter.

Tighten the cap until top of the sealing insert forms a small bead between the cap and the cable.

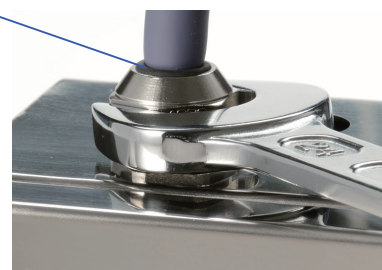


Components

No.	Part name	Material	Color / Finish
1	Cap	Brass	Nickel plated
2	Sealing insert	TPE	Black
3	Connector	Brass	Nickel plated
-	O-ring	NBR	Black
4	Lock nut	Brass	Nickel plated

AGM dimensions

■ DXF/DWG/PDF drawings available on our website.

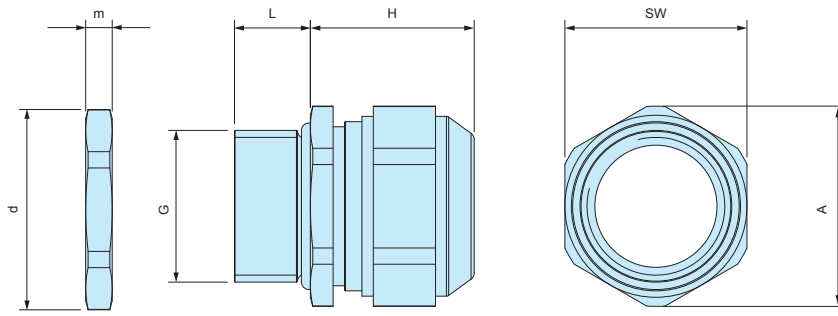

Product no. / Details

Product no.	G		Cable range		L	H Max	SW	A	d	m	Pack of
	Thread size	Mounting hole	Min	Max							
AGM6-2.5	M6×1.0	Φ6.2	2	2.5	8	12	8	9	10	2.8	1
AGM6-3	M6×1.0	Φ6.2	2.5	3.0	8	12	8	9	10	2.8	1
AGM6-3.5	M6×1.0	Φ6.2	3.0	3.5	8	12	8	9	10	2.8	1
AGM8-5	M8×1.25	Φ8.2	3.5	4.7	10	14	11	12	12	3	1
AGM10-6	M10×1.5	Φ10.2	4.0	6.0	10	15	13	14.3	14	2.8	1
AGM12-8	M12×1.5	Φ12.2	6.5	8.0	10	17	15	16.5	16.5	2.8	1
AGM16-10.5	M16×1.5	Φ16.2	8.0	10.5	10	21	18	20	21	3	1
AGM20-15	M20×1.5	Φ20.2	11.0	15.0	10	23	24	26.5	26.5	3.5	1
AGM25-20	M25×1.5	Φ25.2	16.0	20.0	11	28	30	33	33	4	1
AGM32-25.5	M32×1.5	Φ32.3	21.0	25.5	13	29.5	36	39.5	39.5	4	1
AGM40-28.5	M40×1.5	Φ40.3	24.0	28.5	13	32	46	50.7	51	5	1
AGM40-33	M40×1.5	Φ40.3	28.5	33.0	13	32	46	50.7	51	5	1
AGM50-37	M50×1.5	Φ50.4	33.0	37.0	14	34	55	59.7	60	5.5	1
AGM50-42	M50×1.5	Φ50.4	37.0	42.0	14	34	55	59.7	60	5.5	1




- Optimal contact spring provides excellent shield contact and the smallest possible transfer impedance.
- Clawed lock nut makes a good EMC shield contact possible on conductive enclosures.
- Shape of the contact spring not only allows for a large clamping range to the shield but also enables easy and faster installation and re-installation.
- 2-piece detachable sealing inserts can be adapted to the wider existing cable diameter on site.
(AGE12 available only with 1-piece sealing insert)

Technical Data

Protection class : IP68 2bar / 30min, IP69K
 Operating temperature : -60°C ~ +100°C
 Compliant with IEC62444 Var. A

Cable Range

No.	Sealing insert type	
	Assembled	Detached
AGE16-10.5	Φ 6 ~ Φ 7.5	Φ 7.5 ~ Φ10.5
AGE20-15	Φ 8 ~ Φ10.5	Φ10.5 ~ Φ15
AGE25-20	Φ12.5 ~ Φ15	Φ15 ~ Φ20
AGE32-25	Φ17 ~ Φ20	Φ20 ~ Φ25

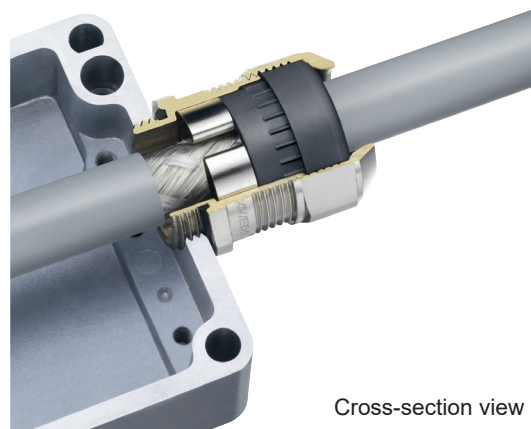


Cross-section view

Components

No.	Part name	Material	Color / Finish
1	Cap	Brass	Nickel plated
2	Sealing insert	TPE	Black
3	Connector	Brass	Nickel plated
4	Contact spring	Stainless steel	Unfinished
-	O-Ring	NBR	Black
5	Lock-nut	Brass	Nickel plated

INSTALLATION Instruction

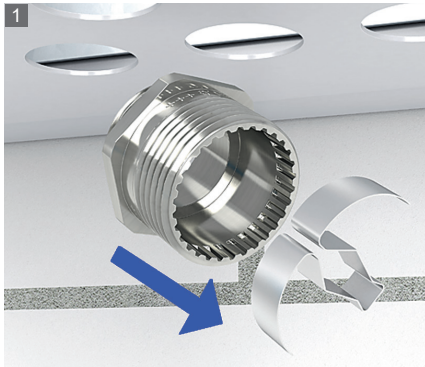


Remove the contact spring from the connector.



Install the connector onto the enclosure.



Strip the cable.

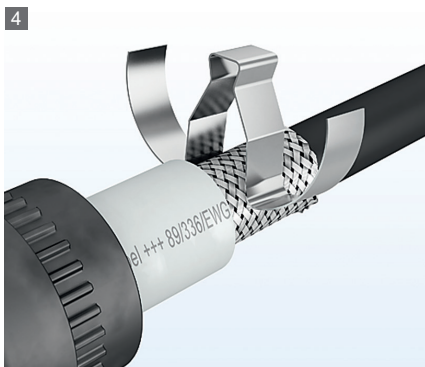

Clip the contact spring on the shielded cable.




Pass the cable through the sealing insert and cap.



Tighten the cap to complete.

AGE dimensions

■ DXF/DWG/PDF drawings available on our website.

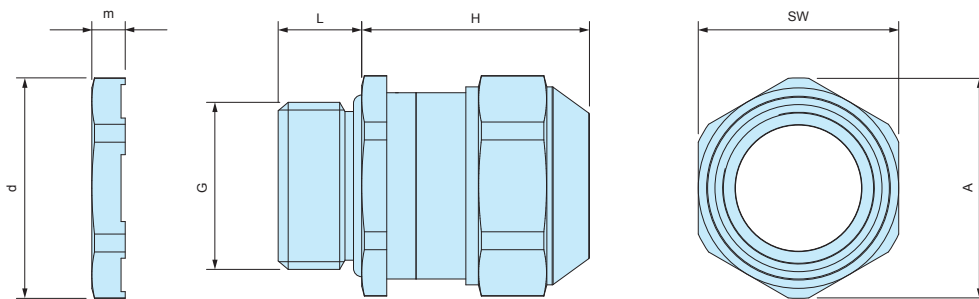

Product no. / Details

Product no.	G		Cable range		L	H Max	SW	A	d	m	Pack of
	Thread size	Mounting hole	Min	Max							
AGE12-5	M12×1.5	Φ12.2	3.5	5.0	10	22	15	16.5	16.5	3.5	1
AGE12-6.5	M12×1.5	Φ12.2	5.0	6.5	10	22	15	16.5	16.5	3.5	1
AGE16-10.5	M16×1.5	Φ16.2	6.0	10.5	10	25	18	20	21	3.5	1
AGE20-15	M20×1.5	Φ20.2	8.0	15.0	10	27	24	26.5	26.5	4	1
AGE25-20	M25×1.5	Φ25.2	12.5	20.0	11	33	30	33	33	4	1
AGE32-25	M32×1.5	Φ32.3	17.0	25.0	13	34	36	39.5	39.5	5	1

AGH SERIES

HEAT RESISTANT METAL CABLE GLAND




- Heat resistant sealing insert made of FPM material. Resistant up to 200°C
- IP68 1bar / 30min high performance waterproof cable gland.

Technical Data

Protection class : Protection class IP68 1bar / 30min
 10m depth immersion in 30 minutes
 Operating temperature : -40°C ~ +200°C
 Compliant with EN50262 Var. A



AGH series

Thicker sealing insert evenly clasp onto the cable by having a larger area.
 Remains durable even after repeated tightening / loosening.

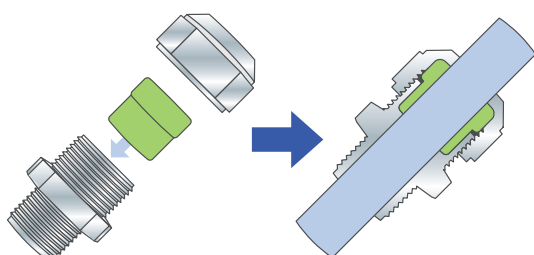


Conventional cable gland

If over-tightened, it can cause the rubber bush or cable to deform,
 which may allow water to seep in.

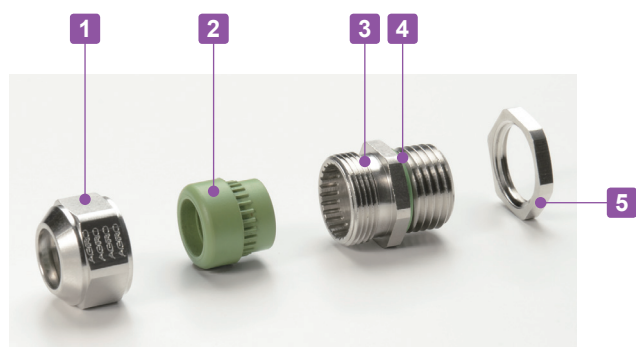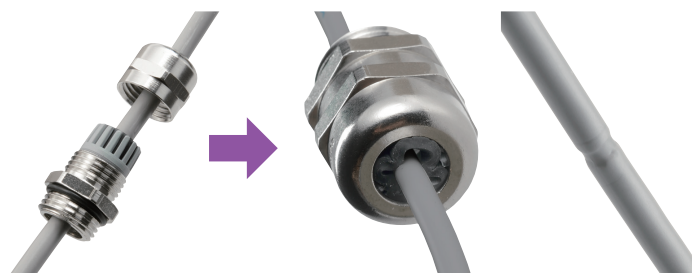

- Tightening torque varies depending on the cable diameter.
 Tighten until the sealing insert protrudes slightly from the cap.

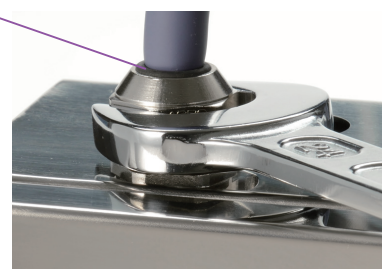


Components

No.	Part name	Material	Color / Finish
1	Cap	Brass	Nickel plated
2	Sealing insert	FPM	Green
3	Connector	Brass	Nickel plated
4	O-Ring	FPM	Green
5	Lock-nut	Brass	Nickel plated

AGH dimensions

■ DXF/DWG/PDF drawings available on our website.

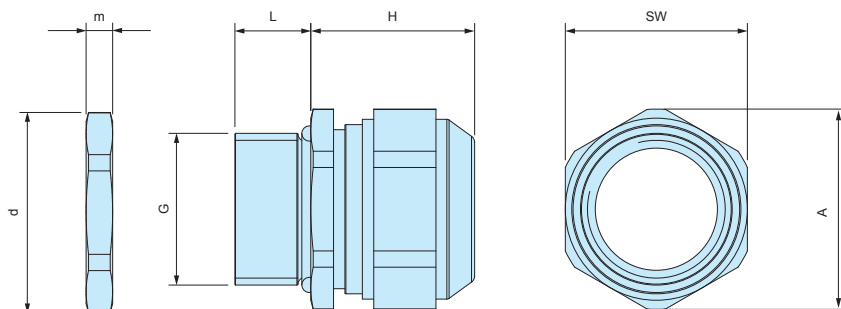

Product no. / Dimensions

Product no.	G		Cable range		L	H Max	SW	A	d	m	Pack of
	Thread size	Mounting hole	Min	Max							
AGH10-6	M10×1.5	Φ10.2	4.0	6.0	10	15	13	14.3	14.2	3	1
AGH12-8	M12×1.5	Φ12.2	6.5	8.0	10	17	15	16.5	16.5	3	1
AGH16-10.5	M16×1.5	Φ16.2	8.0	10.5	10	20	18	20	21	3	1
AGH20-15	M20×1.5	Φ20.2	11.0	15.0	10	23	24	26.5	26.3	3.5	1
AGH25-20	M25×1.5	Φ25.2	16.0	20.0	11	27	30	33	33	4	1
AGH32-25.5	M32×1.5	Φ32.3	21.0	25.5	13	28.5	36	39.7	39.7	4	1



- Torque wrench with interchangeable head.
- Suitable for the tightening of cable glands requiring a specific torque.
- Open end interchangeable head (spanner head) TWE series available separately.
- Spanner head is not included.

Product no. / Details

Product no.	Length	Torque range (N · m)	Increments (N · m)
TWH0.5-5	215	0.5 ~ 5.0	0.05



Notes

The torque wrench is not subject to RoHS regulations.

Since it is an OEM product and not a JIS-compliant product, no calibration services or inspection reports, etc. are provided.

When tightening, proceed first with a low value (half of the reference) of the recommended torque, and set the appropriate tightening torque for the cable and mounting part that will be tightened thereafter.

Please read the operation manual (refer to TAKACHI website) before use to ensure correct and safe usage of the product.

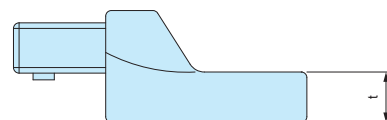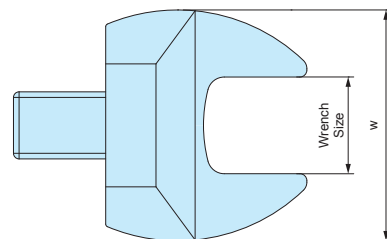

- Dedicated open end interchangeable head for TWH series.
- Various interchangeable heads are available to fit a range of cable gland sizes.

Product no. / Details

Product no.	Wrench size	w	t
TWE- 8	8	27	6
TWE- 9	9	27	6
TWE-11	11	27	6
TWE-12	12	30	6
TWE-13	13	31	6
TWE-15	15	40	9
TWE-16	16	40	9
TWE-17	17	41	9
TWE-18	18	42	9
TWE-19	19	42	10
TWE-21	21	47	10

Product no.	Wrench size	w	t
TWE-22	22	52	10
TWE-23	23	53	11
TWE-24	24	55	11
TWE-27	27	58	13
TWE-29	29	58	13
TWE-30	30	65	14
TWE-32	32	65	14
TWE-33	33	65	14
TWE-34	34	70	15
TWE-36	36	72	15

Note: These open end head is not subject to RoHS regulations.

Suitable TWE model

RM • RMW series


Product no.	Cap width	Suitable model	Lock nut width	Suitable model
RM8S-2.5	11.8	TWE-12	–	n/a
RM • RMW8L-2.5	11.8	TWE-12	12.6	TWE-13
RM8S-4	11.8	TWE-12	–	n/a
RM • RMW8L-4	11.8	TWE-12	12.6	TWE-13
RM • RMW10S-6	13	TWE-13	–	n/a
RM • RMW10L-6	13	TWE-13	14.8	TWE-15
RM • RMW12S-7	16	TWE-16	17	TWE-17
RM • RMW12L-7	16	TWE-16	17	TWE-17
RM • RMW16S-8	19	TWE-19	22	TWE-22
RM • RMW16L-8	19	TWE-19	22	TWE-22
RM • RMW20S-12	24	TWE-24	26.2	n/a
RM • RMW20L-12	24	TWE-24	26.2	n/a
RM • RMW25L-17	33	TWE-33	32.6	n/a
RM • RMW32L-21	36	TWE-36	40.3	n/a
RM • RMW40L-27	45.7	n/a	51	n/a
RM • RMW50L-38	60	n/a	61.2	n/a
RM63L-44	68	n/a	73.4	n/a

RPG series

Product no.	Cap width	Suitable model	Lock nut width	Suitable model
RPG7-7	16	TWE-16	18.7	TWE-19
RPG9-8	19	TWE-19	21.8	TWE-22
RPG11-10	22	TWE-22	23.7	TWE-24
RPG13.5-11	24	TWE-24	27	TWE-27
RPG16-14	26.7	TWE-27	29.8	TWE-30
RPG21-18	33	n/a	35.8	TWE-36
RPG29-25	42	n/a	45.8	n/a

RSP series

Product no.	Cap width	Suitable model	Lock nut width	Suitable model
RSP12-6	16	TWE-16	17	TWE-17
RSP16-8	19.5	n/a	22	TWE-22
RSP20-11	24	TWE-24	26.2	n/a
RSP25-16	33	TWE-33	32.6	n/a

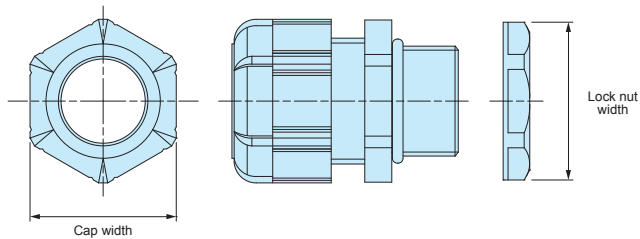

Note 1) ""n/a"" indicates no suitable spanner head size and torque value available.

Note 2) Dimensions of Cap and Lock nut width are in mm.

AG series

Product no.	Cap width	Suitable model	Lock nut width	Suitable model
AG8-3.5	12	TWE-12	–	n/a
AG8-5	12	TWE-12	–	n/a
AG10-6	15	TWE-15	–	n/a
AG12-5	17	TWE-17	17	TWE-17
AG12-6.5	17	TWE-17	17	TWE-17
AG12-8	17	TWE-17	17	TWE-17
AG16-10	21	TWE-21	22	TWE-22
AG20-15	27	TWE-27	27	TWE-27
AG25-16	34	TWE-34	33	TWE-33
AG25-20	34	TWE-34	33	TWE-33
AG32-25.5	41	n/a	42	n/a
AG40-28.5	50	n/a	48	n/a
AG40-33	50	n/a	48	n/a
AG50-37	60	n/a	59	n/a
AG50-42	60	n/a	59	n/a

AGM series

Product no.	Cap width	Suitable model	Lock nut width	Suitable model
AGM6-2.5	8	TWE-8	9	TWE- 9
AGM6-3	8	TWE-8	9	TWE- 9
AGM6-3.5	8	TWE-8	9	TWE- 9
AGM8-5	11	TWE-11	11	TWE-11
AGM10-6	13	TWE-13	13	TWE-13
AGM12-8	15	TWE-15	15	TWE-15
AGM16-10.5	18	TWE-18	19	TWE-19
AGM20-15	24	TWE-24	24	TWE-24
AGM25-20	30	TWE-30	30	TWE-30
AGM32-25.5	36	TWE-36	36	TWE-36
AGM40-28.5	46	n/a	51	n/a
AGM40-33	46	n/a	51	n/a
AGM50-37	55	n/a	60	n/a
AGM50-42	55	n/a	60	n/a

AGE series

Product no.	Cap width	Suitable model	Lock nut width	Suitable model
AGE12-5	15	TWE-15	15	TWE-15
AGE12-6.5	15	TWE-15	15	TWE-15
AGE16-10.5	18	TWE-18	19	TWE-19
AGE20-15	24	TWE-24	24	TWE-24
AGE25-20	30	TWE-30	30	TWE-30
AGE32-25	36	n/a	36	n/a

AGH series

Product no.	Cap width	Suitable model	Lock nut width	Suitable model
AGH10-6	13	TWE-13	13	TWE-13
AGH12-8	15	TWE-15	15	TWE-15
AGH16-10.5	18	TWE-18	19	TWE-19
AGH20-15	24	TWE-24	24	TWE-24
AGH25-20	30	TWE-30	30	TWE-30
AGH32-25.5	36	TWE-36	36	TWE-36

TWH0.5-5 Torque Wrench Operation Manual

1 For Safety Use

Safety Precautions

Please read this manual carefully before use while following operation instructions.

The manufacturer / retailer etc. will not be are not liable for any personal injuries, damage to the product, or other property damage, etc. caused by improper use.

Warnings




- Do not use beyond the maximum torque value. This may cause damage and injury.
- Do not use the torque wrench as a hammer or lever, or applying strong impact.
- Do not modify or disassemble the torque wrench. These may cause strength or accuracy problems, which may lead to accidents and injuries.
- Before use, check for damage, cracks, rust, or deformation. These may cause damage and injury.
- Do not use the torque wrench to loosen nuts or caps as it is a precision instrument.
- Do not operate the torque wrench with oily or greasy hands. This may cause your hands to slip while tightening, leading to accidents or injuries.
- Wear safety glasses or other eye protection while using.
- Be careful not to hit your hands or elbows on surrounding objects when working with a torque wrench.
- Do not use the torque wrench underwater or in the sea.
- When working on elevated platforms, take measures to prevent torque wrenches from falling.

Cautions



- Set the torque before each use.
- Do not lower the scale below the minimum.
- Do not use it outside of the torque scale range.
- Every time before setting the torque, ensure that the handle lock is in the unlock position first before rotating the handle.
- Grip the center of the handle to tighten. Gripping the edge of the handle may cause incorrect torque value.
- Tighten slowly while applying minimal force. Otherwise applied torque value may be incorrect.
- Stop tightening after hearing, or feeling a clicking sound or sensation. Further tightening may result in overtorque.
- Do not use parts such as a pipe to extend the handle.
- Do not drop the torque wrench or apply strong impact.
- Do not use in high temperature and humid environments.
- After use, set the torque wrench to the minimum value.
- After use, remove dirt, dust, mud, oil, water, etc. before storing.
- Store in a dry place when not in use for an extended period of time.

2 Components

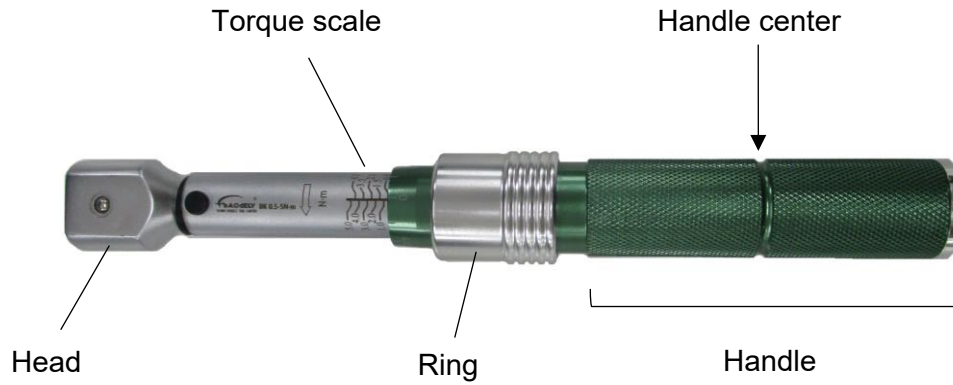

3 How to use

① Push and hold the ring down to unlock.	② Turn the handle.
 A blue arrow points downwards towards the green adjustment ring, indicating the direction to push it down.	 Two blue curved arrows indicate the handle is being rotated. Text to the right says: "Turn the handle while the ring is in the unlock position."
③ Adjust to required torque.	④ Release the ring.
 A red arrow points to the green ring, which is being rotated to align a specific value on the torque scale. The scale has markings from 1.0 to 5.0 N·m.	 A blue arrow points upwards towards the green ring, indicating it is being released. Text below says: "The ring will spring back to its original (lock) position."

TAKACHI ELECTRONICS ENCLOSURE CO., LTD.

TEL. +81-48-222-5409

<https://www.takachi-enclosure.com/>

2023.10