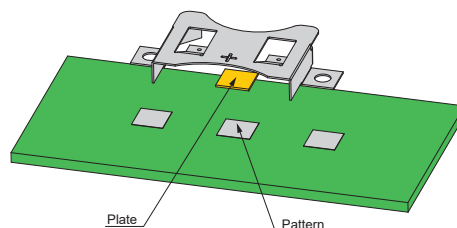


BK•BS•SMTM series**COIN CELL HOLDER**


- Material / Finish : Phosphor bronze / Nickel plated
- Metal coin cell holder.
- SMTM series is available with tape and reel packaging (TR Type) suitable for automated placement equipment.
- Make a negative pole on the PCB and place or solder a plate onto it.
BK2032M negative contact can be used for SMTM2032 and BK-888.

**Product no. / Details**



Product no.	Matching coin cell	Contact type	Weight (g)	Pack of
BK-879	SR621/ML621	Surface mount x 2	0.2	10
BK-5091	LR44	Through hole x 2	0.5	10
BS-M-1225	CR1220/CR1225	Surface mount x 2	0.4	10
BS-S-1225	CR1220/CR1225	Through hole x 2	0.4	10
SMTM1632	CR1632	Surface mount x 2	0.7	10
BS-S-1632	CR1620/CR1632	Through hole x 2	0.7	10
BK-5067	CR2016	Surface mount x 2	0.8	10
SMTM2032	CR2032/CR2025	Surface mount x 2	0.9	10
BK-888	CR2032/CR2025	Through hole x 2	0.9	10
BK-2430	CR2430	Through hole x 2	1.2	10
BK-2430SM	CR2430	Surface mount x 2	1.6	10
BK-2450	CR2450	Through hole x 2	1.3	10
BK-2450SM	CR2450	Surface mount x 2	1.4	10
BS-M-1225-TR	CR1220/CR1225	Surface mount x 2	—	1,000 / Tape and reel
SMTM1632-TR	CR1632	Surface mount x 2	—	700 / Tape and reel
SMTM2032-TR	CR2032/CR2025	Surface mount x 2	—	600 / Tape and reel

SMTM • BS • BK dimensions



■ DXF/DWG/PDF drawings available on our website.

BK-879


PCB layout top view

**BK-5091**


PCB layout top view

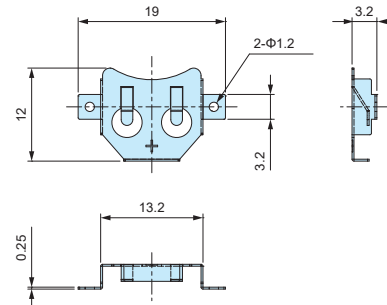**BS-M-1225**


PCB layout top view




BS-S-1225

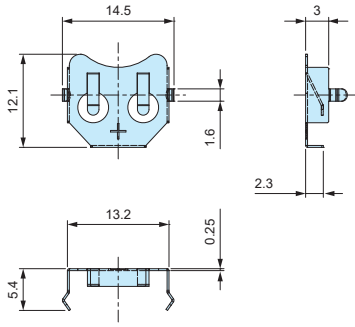


PCB layout top view




SMTM1632

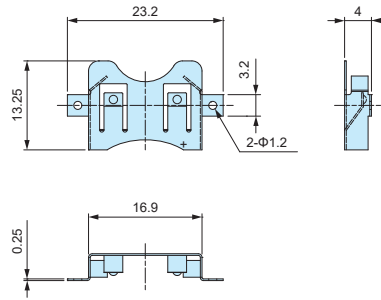


PCB layout top view

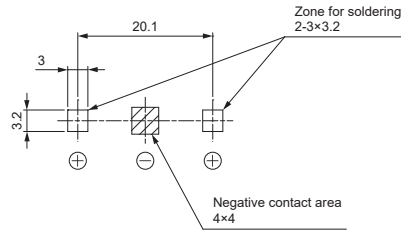


BS-S-1632

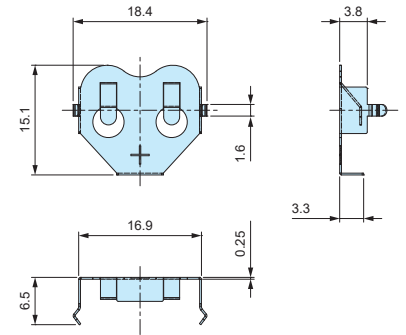


PCB layout top view




BK-5067

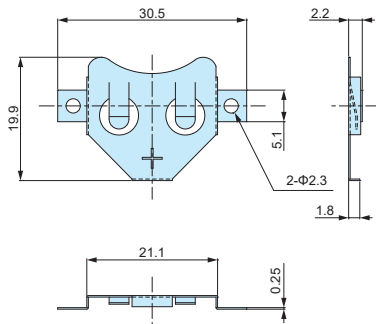


PCB layout top view

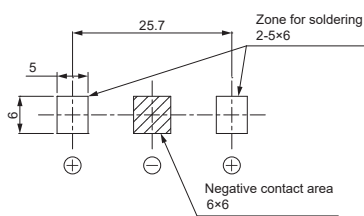


SMTM2032

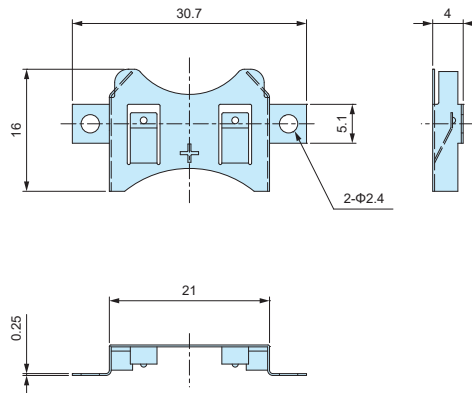


PCB layout top view

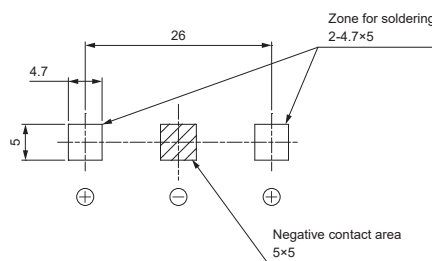


BK-888

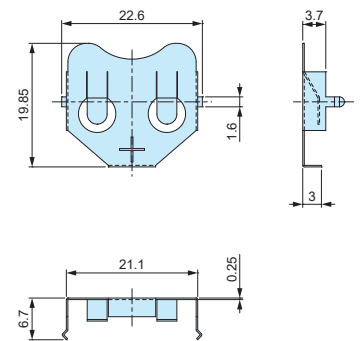


PCB layout top view




BK-2430

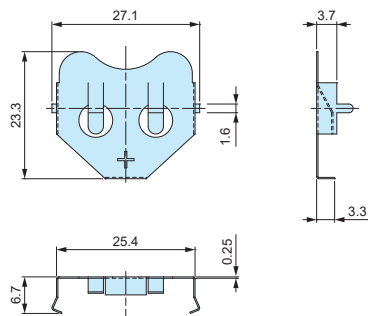


PCB layout top view




BK-2430SM

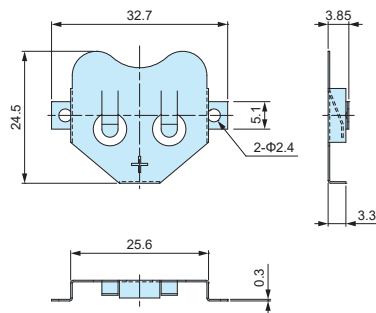


PCB layout top view

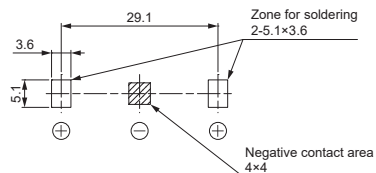


BK-2450

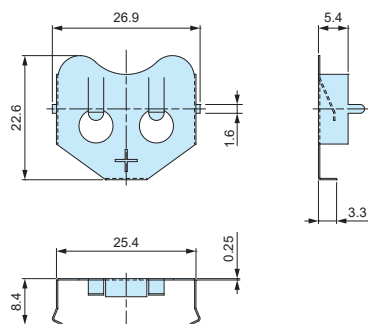


PCB layout top view



BK-2450SM

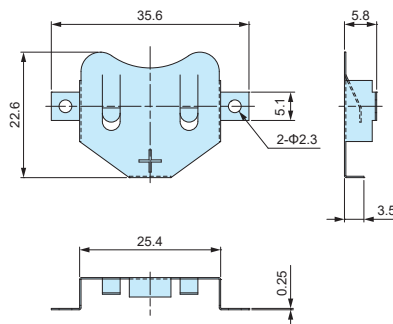


PCB layout top view

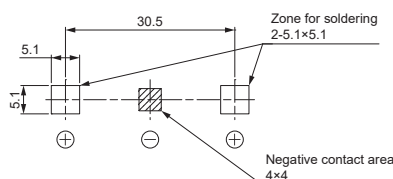

BK-2032M

NEGATIVE COIN CELL CONTACT for CR2032

■ DXF/DWG/PDF drawings available on our website.





■ Material / Finish : Phosphor bronze / Nickel plated


■ Negative contact for CR2032 coin cell.

■ Suitable to be used with SMTM2032 or BK-888 holders.


■ Cut area will have base material exposed (unfinished).




Installation hole layout

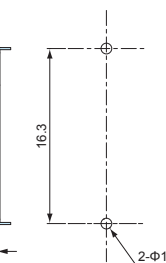

SMTM + BK-2032M PCB layout top view




Coin cell insert




Holder drawings

BK-888 + BK-2032M PCB layout top view



Coin cell insert




Holder drawings

■ Recommended PCB thickness for installation is 1.0mm or thinner.

Product no. / Feature

Product no.	Matching coin cell	Contact type	Weight (g)	Pack of
BK-2032M	CR2032	Through hole x 2	0.2	10


Tape dimensions

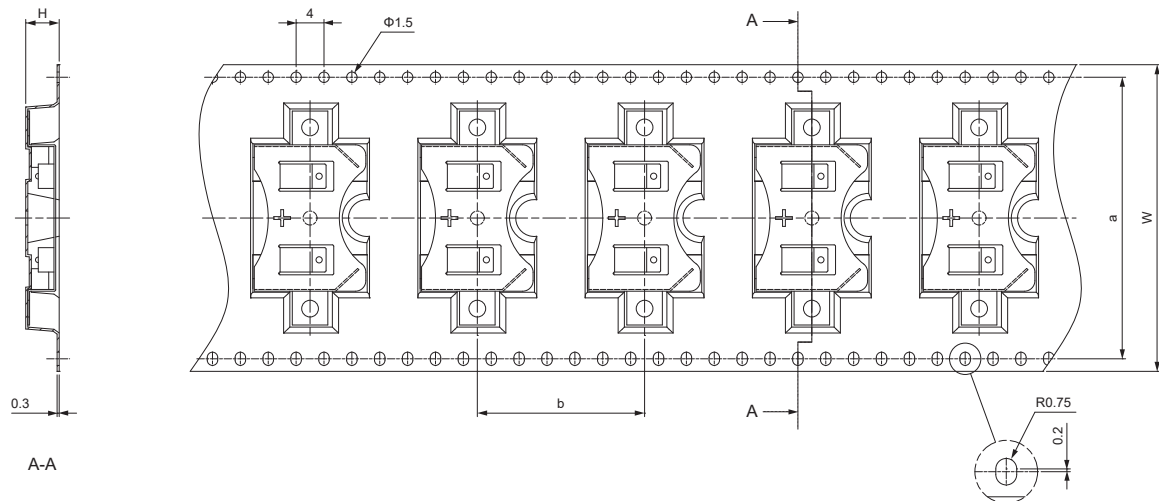

※Holder storage spacing will vary depending on model.

Product no.	W	H	a	b
SMTM1225-TR	32	3.8	28	16
SMTM1632-TR	44	4.5	40.4	20
SMTM2032-TR	44	4.8	40.4	24

Reel dimensions

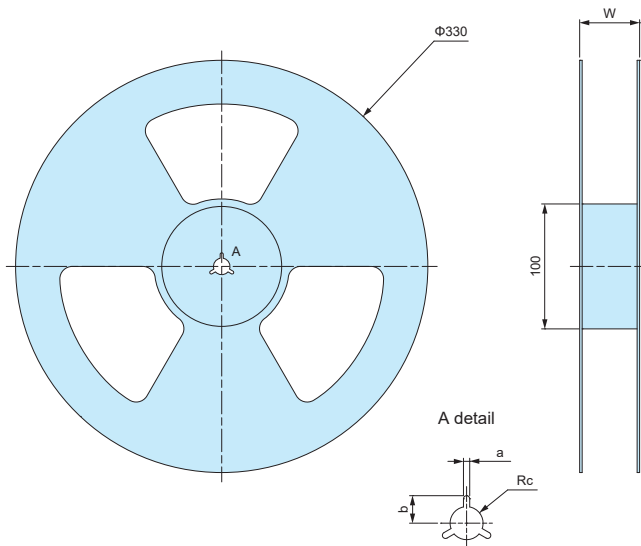

Product no.	Pcs / Reel	w	a	b	c
SMTM1225-TR	1,000	38.5	2.1	10.4	6.8
SMTM1632-TR	700	50.5	2.1	10.4	6.6
SMTM2032-TR	600	48.5	2.4	11	6.6