

**SSK** series

**POLE MOUNTING BRACKET for UPC**




- Stainless steel pole mounting bracket for UPC series.
- No hole milling is required for attaching the pole mounting bracket to the enclosure.
- Pole mount is possible with the use of SSK-B-UPC screw set together with either SNB series pole mounting strap, or PKB series pole mounting belt.



**SSK dimensions**

■ DXF/DWG/PDF drawings available on our website.

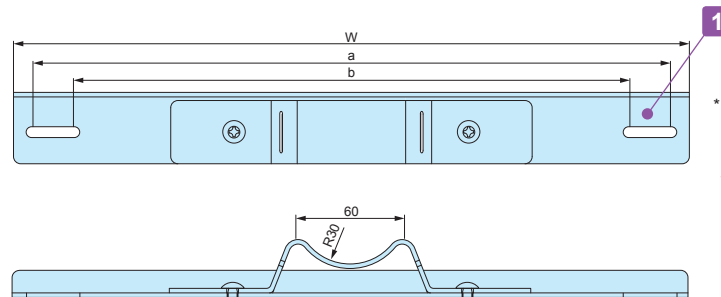

\*Mounting bracket structure may differ between different models. Refer to the drawings on our website for further details.

**Components**

No.	Part name	Pcs	Material	Color / Finish
1	Mounting bracket	2	Stainless steel SUS304	Barrel finish

**Product no. / Details**

Product no.	W	a	b	Suitable model	Suitable strap / belt	Pack of
SSK-160	142	129.5	106.5	UPC172213G	PKB-10PM • 10P • 10S, SNB series	2
SSK-210	192	180.5	131.5	UPC232818G	PKB-10PM • 10P • 10S, SNB series	2
SSK-280	260	244.5	195.5	UPC283318G	PKB-10PM • 10P • 10S, SNB series	2
SSK-350	324	302.5	253.5	UPC333818G	PKB-10PM • 10P • 10S, SNB series	2
SSK-400	374	354.5	305.5	UPC384323G	PKB-20S, SNB series	2
SSK-530	484	462	380	UPC434829G	PKB-20S, SNB series	2

**SSK-B** series

**POLE MOUNTING BRACKET SCREW**



- Screw set for mounting SSK series pole mounting bracket onto UPC series.
- Material / Finish : Stainless steel / Unfinished

**Product no. / Details**


Product no.	Screw details	Suitable series	Pack of
SSK-B-UPC	Pan head UNF#10-32 × 3/8	UPC	4

**SNB** series

**STAINLESS STEEL POLE MOUNTING STRAP**



**SNB dimensions**

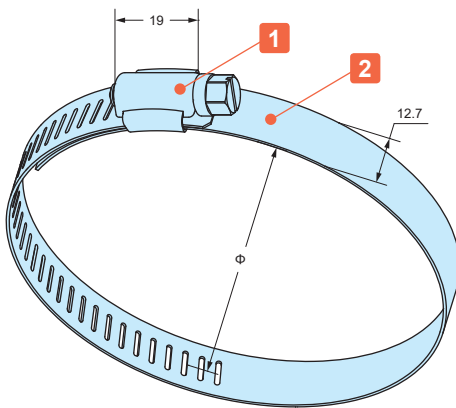

- Corrosion resistant stainless steel (SUS304) belt clamp.
- It can be installed securely by tightening the screw.
- 8 mm nut driver (box driver) is recommended for tightening. Minus screw driver can also be used.

**Components**

No.	Part name	Pcs	Material	Finish
1	Bracket	1	Stainless steel SUS304	Polished
2	Strap	1	Stainless steel SUS304	Polished

**Product no. / Dimensions**

Product no.	Applicable diameter (Φ)	Strap width	Strap thickness	Recommended torque N · m	Weight (g)	Pack of
SNB 52- 76	52 ~ 76	12.7	0.6	0.7 ~ 1.0	27.5	1
SNB 72- 95	72 ~ 95	12.7	0.6	0.7 ~ 1.0	30	1
SNB 91-114	91 ~ 114	12.7	0.6	0.7 ~ 1.0	34.5	1
SNB105-127	105 ~ 127	12.7	0.6	0.7 ~ 1.0	37.5	1
SNB117-140	117 ~ 140	12.7	0.6	0.7 ~ 1.0	39.5	1
SNB130-153	130 ~ 153	12.7	0.6	0.7 ~ 1.0	41.5	1
SNB142-165	142 ~ 165	12.7	0.6	0.7 ~ 1.0	43.5	1
SNB155-178	155 ~ 178	12.7	0.6	0.7 ~ 1.0	46.5	1
SNB168-191	168 ~ 191	12.7	0.6	0.7 ~ 1.0	49	1
SNB181-204	181 ~ 204	12.7	0.6	0.7 ~ 1.0	51	1
SNB194-217	194 ~ 217	12.7	0.6	0.7 ~ 1.0	52.5	1
SNB207-230	207 ~ 230	12.7	0.6	0.7 ~ 1.0	57	1
SNB220-243	220 ~ 243	12.7	0.6	0.7 ~ 1.0	59.5	1
SNB233-256	233 ~ 256	12.7	0.6	0.7 ~ 1.0	62.5	1
SNB246-269	246 ~ 269	12.7	0.6	0.7 ~ 1.0	64	1
SNB259-282	259 ~ 282	12.7	0.6	0.7 ~ 1.0	67.5	1
SNB272-295	272 ~ 295	12.7	0.6	0.7 ~ 1.0	70	1
SNB285-308	285 ~ 308	12.7	0.6	0.7 ~ 1.0	71	1

■ Recommended torque listed is for reference only; actual may differ. Assemble after testing torque.

**SNB Strap required**

Suitable series	Suitable models						Required
SSK series	SSK-S1	SSK-160	SSK-170	SSK-200	SSK-210	SSK-250	2
	SSK-280	SSK-300	SSK-350	SSK-400	SSK-530		
WGMB series	WGMB-1W						1

**PKB** series

**POLE MOUNTING BELT**



PKB-10PM, 10P




PKB-10S, 20S

- Pole mounting belt for attachment of enclosures with suitable pole mount brackets or construction onto poles.
- Designed for one time use only (not reusable).
- Strong stainless steel clamping type and easy installation plastic type are available.


**PKB dimensions**

■ DXF/DWG/PDF drawings available on our website.


PKB-10PM, 10P

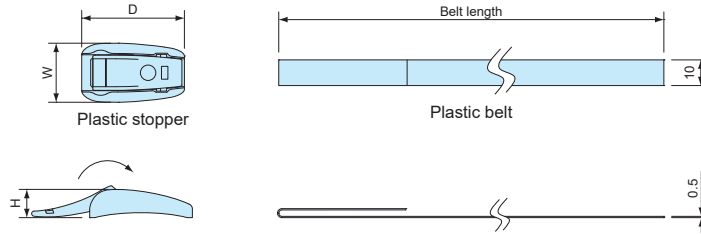

PKB-10S

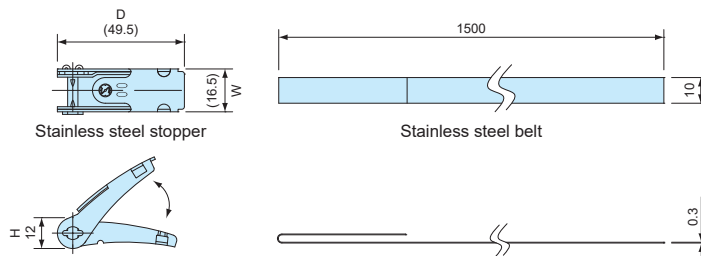

PKB-20S

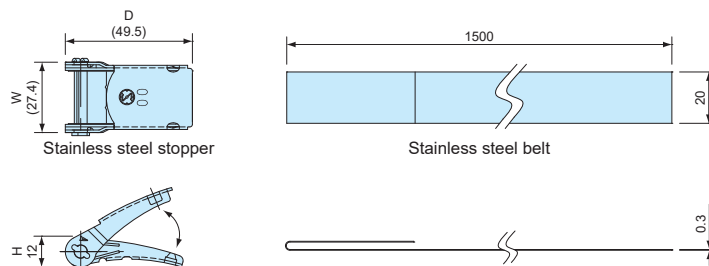

**Components**

No.	Part name	Material	Color / Finish
1	Stopper	Stainless steel SUS304 • POM	Barrel finish • Black
2	Belt	Stainless steel SUS430 • PET	Bright annealed finish • Gray

**Product no. / Dimensions**

Product no.	W	D	H	Belt length	Belt material	Tensile strength (horizontal)	Weight (g)	Pack of
PKB-10PM	24	23	11	500 mm	PET	0.8kN	14	2
PKB-10PM	23	40	11	1,500 mm	PET	1.3kN	31.8	2
PKB-10S	16.5	49.5	12	1,500 mm	Stainless steel SUS304	1.4kN	101.6	2
PKB-20S	27.4	49.5	12	1,500 mm	Stainless steel SUS430	2.9kN	182.2	2