


SU SERIES

NETWORK PLASTIC CASE



Technical Data

Protection class: IP40
Operating temperature: -10°C ~ +60°C

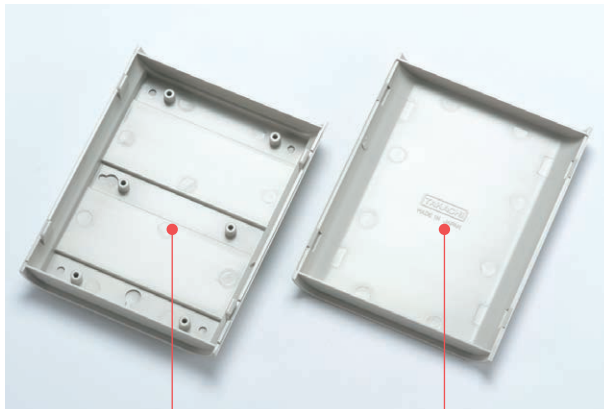

2

1

- Rounded shape design.
- Suitable for wall-mount communication device usage.
- Snap on / off cover. No screws are required.

Components

No.	Part name	Material	Color / Finish
1	Cover	ABS UL94HB	Light gray • White
2	Base	ABS UL94HB	Light gray • White

Accessories (Optional parts)



Tapping standoff TPS series
See page TPS • MT-1




PCB mounting screw EM series
See page EM • MR-1


SU dimensions

■ DXF/DWG/PDF drawings available on our website.

SU-140

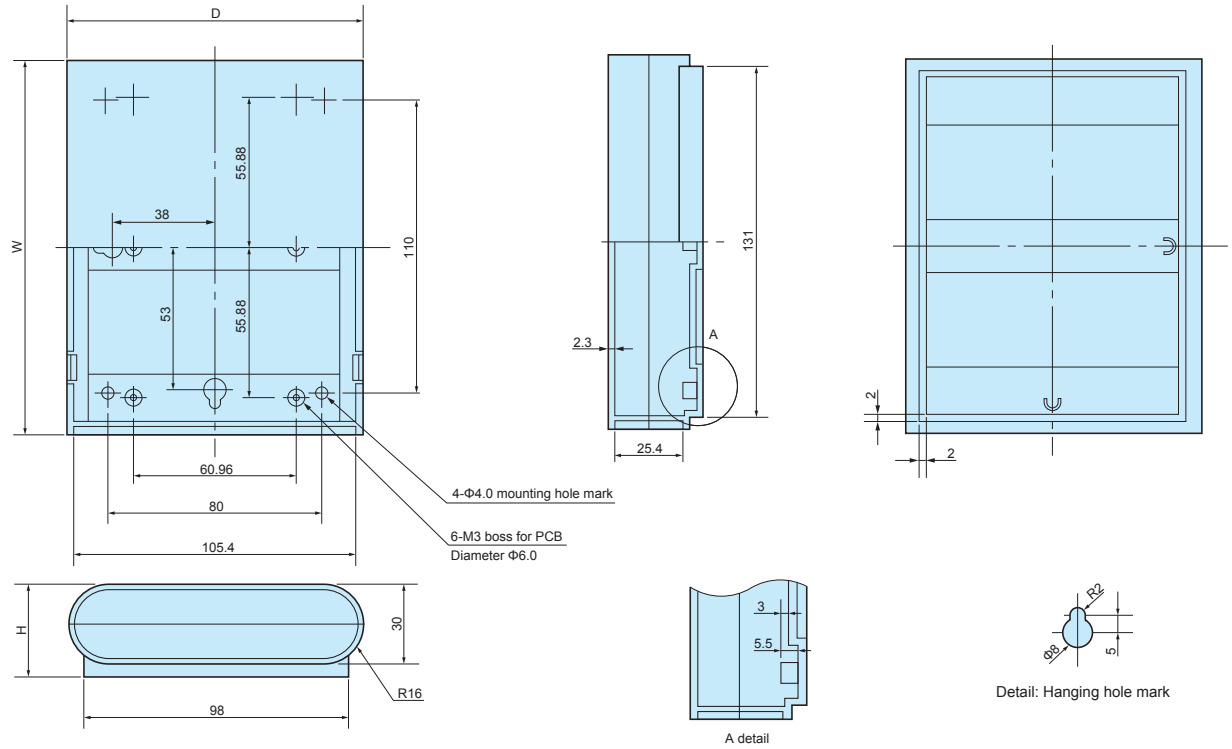

SU-180

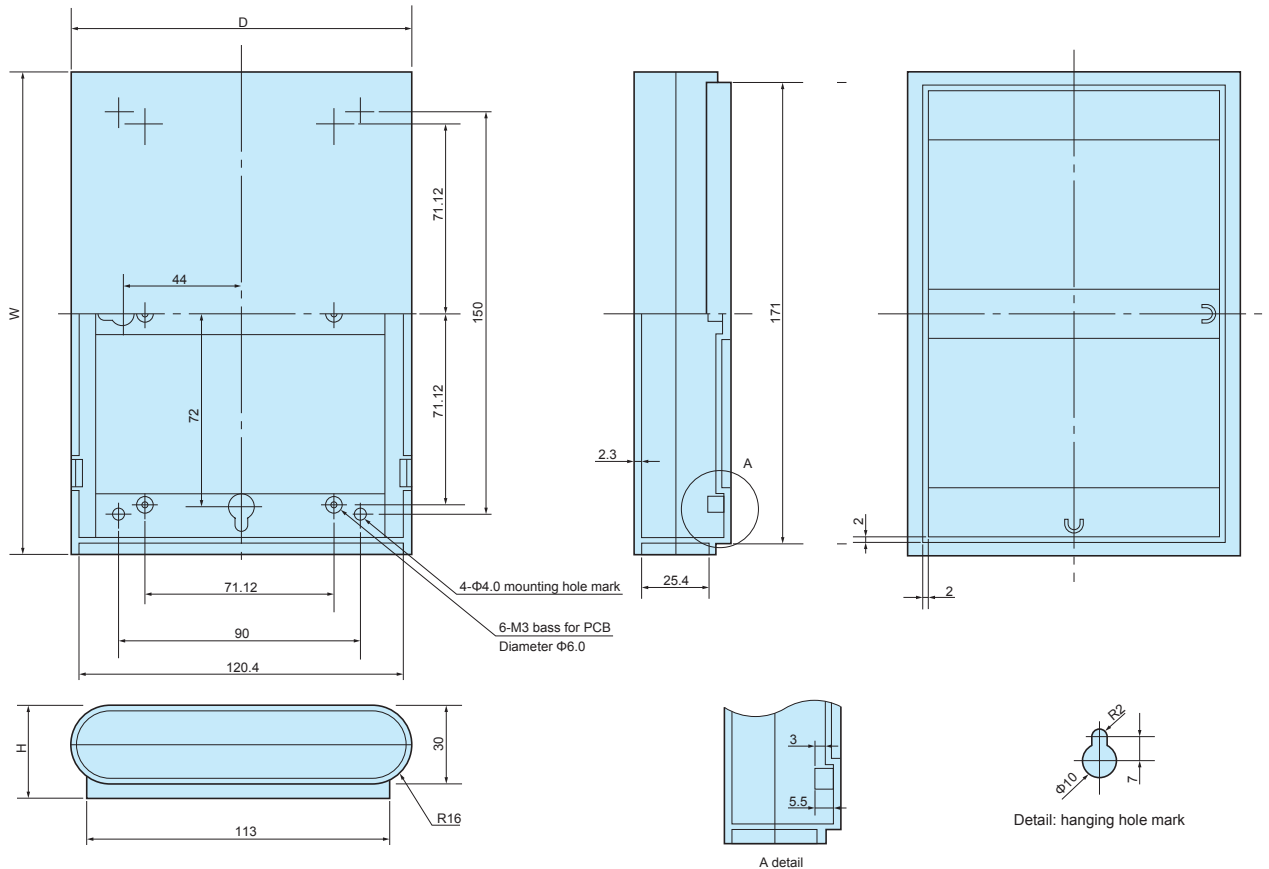


Product no. / Dimensions

Product no.		Dimensions			Weight (g)
● Light gray	● White	W	H	D	
SU-140G	SU-140W	140	35	110	100
SU-180G	SU-180W	180	35	125	140

TPS series

TAPPING STANDOFF

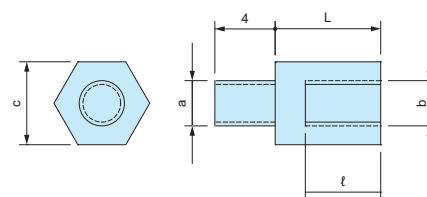

■ Tapping screw head allows for easy installation onto existing enclosure boss mount.

■ DXF/DWG/PDF drawings available on our website.

■ 4 different sizes available : M2.3, M2.6, M3 and M4 size.

Product no. / Details


■ Material / Finish : Brass / Unfinished

Product no.	Screw size (a)	Screw size (b)	c	L	ℓ	Weight (g)	Pack of	Suitable models
TPS-M2.3-4	2.3	M2.3	5	4	3	0.7	4	WH series • PFE series LC • LCE • LCS • LCT series PF • PFF series (M2.3 boss models) TW • TWN • TWF series (M2.3 boss models) WP series (M2.3 boss models)
TPS-M2.3-5	2.3	M2.3	5	5	3	0.9	4	
TPS-M2.3-6	2.3	M2.3	5	6	4	1	4	
TPS-M2.3-7	2.3	M2.3	5	7	5	1.2	4	
TPS-M2.3-8	2.3	M2.3	5	8	6	1.3	4	
TPS-M2.3-10	2.3	M2.3	5	10	6	1.7	4	
TPS-M2.3-12	2.3	M2.3	5	12	6	2	4	
TPS-M2.6-4	2.6	M2.6	5	4	3	0.7	4	PF • PFF series (M2.6 boss models) WP series (M2.6 boss models)
TPS-M2.6-5	2.6	M2.6	5	5	3	0.8	4	
TPS-M2.6-7	2.6	M2.6	5	7	5	1.1	4	
TPS-M2.6-10	2.6	M2.6	5	10	6	1.6	4	
TPS-M2.6-12	2.6	M2.6	5	12	6	2	4	SU • OP TWS • TW • TWN • TWF series (M3 boss models)
TPS-M3-4	3	M3	5.5	4	3	0.8	4	
TPS-M3-5	3	M3	5.5	5	3	1.1	4	
TPS-M3-6	3	M3	5.5	6	4	1.2	4	
TPS-M3-7	3	M3	5.5	7	5	1.3	4	
TPS-M3-8	3	M3	5.5	8	5	1.6	4	
TPS-M3-10	3	M3	5.5	10	6	1.9	4	
TPS-M3-12	3	M3	5.5	12	6	2.3	4	BCAS • BCAP • BCPC • BCPK series (M4 boss models) BCAR • BCPR series (M4 boss models) SPCP • SPCM • WG • WGV • WGPC
TPS-M4-6	4	M4	7	6	4	2	4	
TPS-M4-10	4	M4	7	10	6	3.1	4	
TPS-M4-15	4	M4	7	15	8	4.7	4	
TPS-M4-20	4	M4	7	20	10	6.5	4	



■ Please use a suitable sized socket driver to both secure and loosen the tapping standoff.

Installation example



MT series

PCB MOUNTING SCREWS for TPS




■ Pan head PCB mounting Screws for TPS tapping standoffs.

Product no. / Details


Product no.	M	L	Material	Finish	Pack of
MT2.3-4	2.3	4	Steel	Trivalent chromate	20
MT2.3-6	2.3	6	Steel	Trivalent chromate	20
MT2.6-4	2.6	4	Steel	Trivalent chromate	20
NEW MT2.6-6	2.6	6	Steel	Trivalent chromate	20
MT3-4	3	4	Steel	Trivalent chromate	20
NEW MT3-6	3	6	Steel	Trivalent chromate	20
NEW MT4-4	4	4	Steel	Trivalent chromate	20
NEW MT4-6	4	6	Steel	Trivalent chromate	20

EM series**PCB MOUNTING SCREW**

Pan head



Bind head



- Self-tapping screws for mounting PCB on bosses or standoffs.
- EM-3-6 self-tapping screws are suitable for mounting 1.6mm or thicker PCB.


Product no. / Details

■ Material / Finish : Steel / Trivalent chromate


Product no.	M	L	Head type	Suitable models	Pack of
EM-1.6	1.6	4	Pan	SMW • CSS • CS SIC • SIM • WC • PS (M1.6 boss models)	50
EM-2	2	5	Pan	PS • TW • TWN • TWF SIC • SIM • PF • WC • WP (M2 boss models)	50
NEW EM-B2	2	5	Bind	SIC • SIM (M2 boss models) SIC • SIM6-12-□ (when installing PCB46-101)	50
EM-2.3	2.3	6	Pan	DRC • WH • LC • LCT • LCS • LCE • PFE WSC (Top cover bosses) PF • PFF (M2.3 boss models) TW • TWN • TWF (M2.3 boss models) WP (M2.3 boss models)	50
EM-2.3-8	2.3	8	Pan	WSC (Bottom base bosses)	50
EM-2.6	2.6	6	Pan	PF • PFF • WP (M2.6 boss models)	50
EM-3	3	5	Pan	SU • OP	50
EM-3-6	3	6	Pan	TWS • TW • TWN • TWF (M3 boss models)	50

MR series**TORX SCREW**

Flat head




Pan head



With pin



★ Without pin



- Self-tapping torx screws for securing of the enclosure.

★ : MR1.6-6S, MR2.6-10□, MR3-5Z□ and MR3-14□ are without pin.

Product no. / Details

★ Mark = Without pin

Product no.	M	L	Head no.	Head style	Material	Finish	Suitable models	Pack of
MR1.6-6S★	1.6	6	T3	Pan	Steel	Nickel plated	CSS • CS	20
MR2.5-8PS	2.5	8	T8	Pan	Steel	Nickel plated	PF • PFE • PFF (M2.5 size)	20
MR2.6-10S★	2.6	10	T8	Flat	Steel	Nickel plated	TW • TWN (M2.6 size)	20
MR2.6-10B★	2.6	10	T8	Flat	Steel	Black trivalent chromate	TWF (M2.6 size)	20
MR2.6-12PS	2.6	12	T8	Pan	Steel	Nickel plated	MX • MXA • MXB • MXF (M2.6 size)	20
MR2.6-14PS	2.6	14	T8	Pan	Steel	Nickel plated	LCT • LCS • LC115-F2 / F3 LCT • LCS • LC145S-F6	20
MR2.6-14S	2.6	14	T8	Flat	Steel	Nickel plated	LCT • LCS • LC115H-F2 / F3 / M2 / 9V LCT • LCS • LC135-F4 / M2 / M3 / 9V LCT • LCS • LC135H-F4 / M2 / M3 / 9V LCT • LCS • LC145-F6 / M2 / M4 LCT • LCS • LC145H-F6 / M2 / M4 LCT • LCS • LC165-M4 LCT • LCS • LC165H-M4	20
MR2.6-18S	2.6	18	T8	Flat	Steel	Nickel plated	LCT • LCS • LC115-N / F2 / F3 LCT • LCS • LC145S-F6 / 145S-N LCE115-N TW • TWN7-2-11 / 7-4-11 / 7-5-11 TWF7-2-11 / 7-4-11 / 7-5-11 / 8-2-8 / 8-4-8	20
MR-1S	3	5	T10	Flat	Steel	Nickel plated	LCT • LCS • LC115H-N / F2 / F3 / M2 / 9V LCT • LCS • LC135-N / F4 / M2 / M3 / 9V LCT • LCS • LC135H-N / F4 / M2 / M3 / 9V LCT • LCS • LC145-N / F6 / M2 / M4 LCT • LCS • LC145H-N / F6 / M2 / M4 LCT • LCS • LC165-N / M4 LCT • LCS • LC165H-N / M4 LCE115H-N • LCE135-N • LCE145H-N • LCE165H-N	20
MR-1B	3	5	T10	Flat	Steel	Black trivalent chromate	UC	20
MR3-5ZS★	3	5	T10	Slotted raised countersunk	Steel	Nickel plated	FC • HY • HYR • HYRH (M3 size)	20
MR3-5ZB★	3	5	T10	Flat	Steel	Black trivalent chromate	CF	20
MR3-8PS	3	8	T10	Pan	Steel	Nickel plated	PF • PFE • PFF (M3 size)	20
MR3-14S★	3	14	T10	Flat	Steel	Nickel plated	TW • TWN (M3 size)	20
MR3-14B★	3	14	T10	Flat	Steel	Black trivalent chromate	TWF (M3 size) MX • MXA • MXB • MXF (M3 size)	20