

IP67 WEARABLE ENCLOSURE

A stylish design enclosure with wrist strap,
perfect solution for wearable devices.

SMW series



**Stylish and luxurious mirror
finish enclosure body**



**Water-repellent comfortable
silicone wrist strap**




High water resistance of IP67 withstands submersion in 1m depth for 30 minutes.

Degradation resistant silicone gasket for long-lasting performance.



Tabbed battery and coin battery holder can be installed.



For various wearable IoT devices

Suitable for small IoT devices including LoRaWAN and Sigfox, detectors, RFID tags, GPS terminals and others.

Environmental sensor



Access control system



GPS tracker



Emergency alert system






- Wearable enclosure with IP67 waterproof rating (30min / 1m-depth).
- Off-white models are made of weather-resistant ASA material. Suitable for devices intended to be used under direct sunlight.
- Stylish and easy-to-wear design that suits any situations.
- Suitable for detectors, GPS terminals, RFID devices, small IoT devices and others.

Technical Data

Protection class : IP67 (30min / 1m-depth)
 Operating temperature
 Black (ABS) : -10°C ~ +60°C
 Off-white (ASA) : -30°C ~ +60°C
 Recommended torque : SMW-46□ : 0.2N • m
 SMW-50□ : 0.35N • m

*May become brittle and break under impact when temperature is lowered close to -30°C.

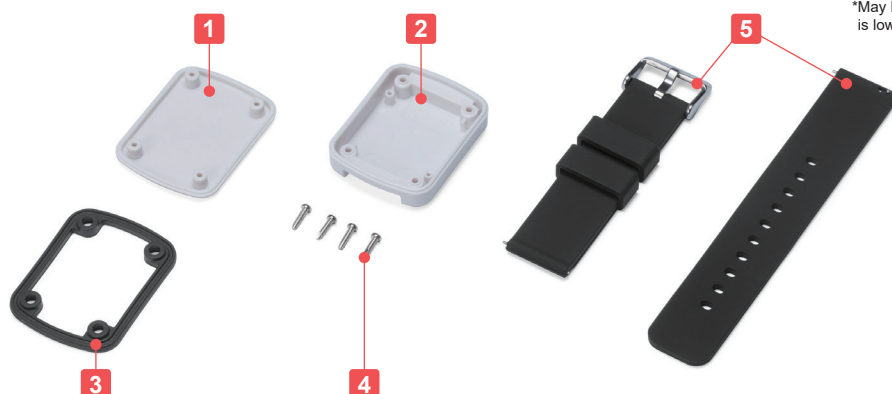

Components

No.	Part name	Pcs	Material	Color / Finish
1	Top cover	1	ABS (UL94HB)	Black / Polished
			ASA (UL94HB)	Off-white / Polished
2	Bottom cover	1	ABS (UL94HB)	Black / Polished
			ASA (UL94HB)	Off-white / Polished
3	Gasket	1	Silicon	Black
4	Tapping screw	4	Stainless steel	Unfinished
5	Wrist strap	1	Silicon • Stainless steel	Black • Polished


Accessories (Optional parts)



PCB mounting screw
EM-1.6
See page 398

SMW dimensions

■ DXF/DWG/PDF/STP drawings available on our website.

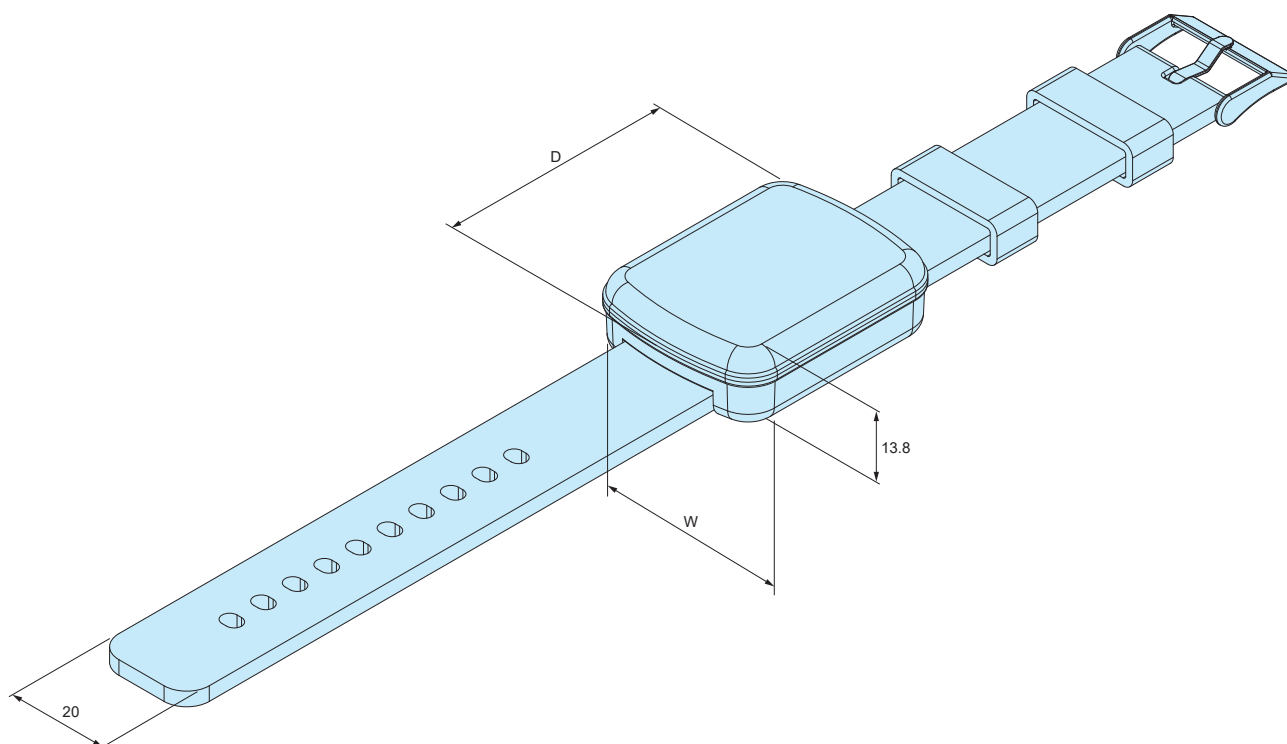

Product no. / Details

Product no.		External dimensions		Weight (g)
● Black	● Off-white	W	D	
SMW-46B	SMW-46W	36	46	28
SMW-50B	SMW-50W	44	50	30.5

Accessories (Optional parts) – COIN CELL BATTERY HOLDERS



- Various coin cell battery holders can be stored.
See coin cell battery holders on our website for more details.
- Chart on the right is based upon mounting onto a 1.0mm thick PCB and attached to the top cover.
- Please note that depending on the mounting location, PCB may not be able to be properly affixed on.

COMPATIBLE COIN CELL BATTERY HOLDERS CHART

Product no.	Compatible coin cell battery holders
SMW-46□	PB621 BK-879 • 2032M BS-M-1225 • BS-S-1225 • SMTM1632
SMW-50□	PB621 BK-879 • 5067 • 2430SM • 2032M BS-M-1225 • BS-S-1225 • SMTM1632 • 2032

NEW COMPACT PLASTIC CASE for NEXT GENERATION IoT

Stylish and elegant plastic case for use with all your IoT related devices

SIC•SIM series



Sleek & Glossy Finish High Performance Case



Multipurpose & Wall Mount Models Available

Multipurpose Model
SIC series



Wall Mount Model
SIM series



COMPACT PLASTIC CASE for IoT DEVICES

SIC • SIM series are snap-in type compact-sized plastic case without screws.

Despite the small size, ample internal space is achieved by a snap-in assembly construction.

A rounded design yet having flat surfaces enables easy customization such as hole milling or printing.

Ideal for small IoT appliances such as LoRa WAN or Sigfox power-saving communication devices, RFID or GPS gadgets, or network sensors.

Wall Mount Communication Network Device



RFID Reader



Remote Controller




Security Sensor



USB Data Logger



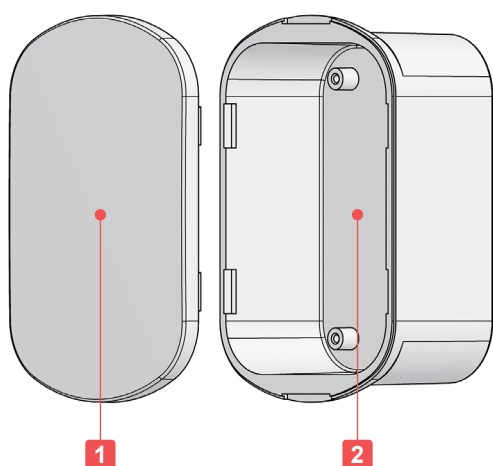

Technical Data

Protection class : IP40
 Operating temperature
 Black (ABS) : -10°C ~ +60°C
 Off-white (ASA) : -30°C ~ +60°C

*May become brittle and break under impact when temperature is lowered close to -30°C.

- 8 new sizes added for a total of 19 different sizes available for selection.
- Small rounded design plastic case ideal for use as IoT devices.
- Easy and tool-less assembly snap-in case.
- While being small in size, there is ample internal space by utilization of the snap-in structure.
- The polished surface also provides a high-end finish and gives off a superior quality and feel while having superb cost performance.
- Off-white models are made of weather-resistant ASA material. Suitable for devices intended to be used under direct sunlight.
- Optional universal PCB, PCB32-53 is compatible with SIC5-7-2 and 5-7-3 models. See PCB series on our website for more details.

Components

No.	Part name	Pcs	Material	Color / Finish
1	Cover	1	ABS UL94HB	Black / Polished
			Weather-resistant ASA UL94HB	Off-white / Polished
2	Base	1	ABS UL94HB	Black / Polished
			Weather-resistant ASA UL94HB	Off-white / Polished

Accessories (Optional parts)



Rubber strain relief cord protector
 CBS series
 See page 385

Double-sided mounting tape DST series
 See page 393


Neodymium magnet NMG series
 See page 392

PCB mounting screw EM-2
 See page 398

Universal PCB PCB series
 See website

SIC dimensions


■ DXF/DWG/PDF/STP drawings available on our website.

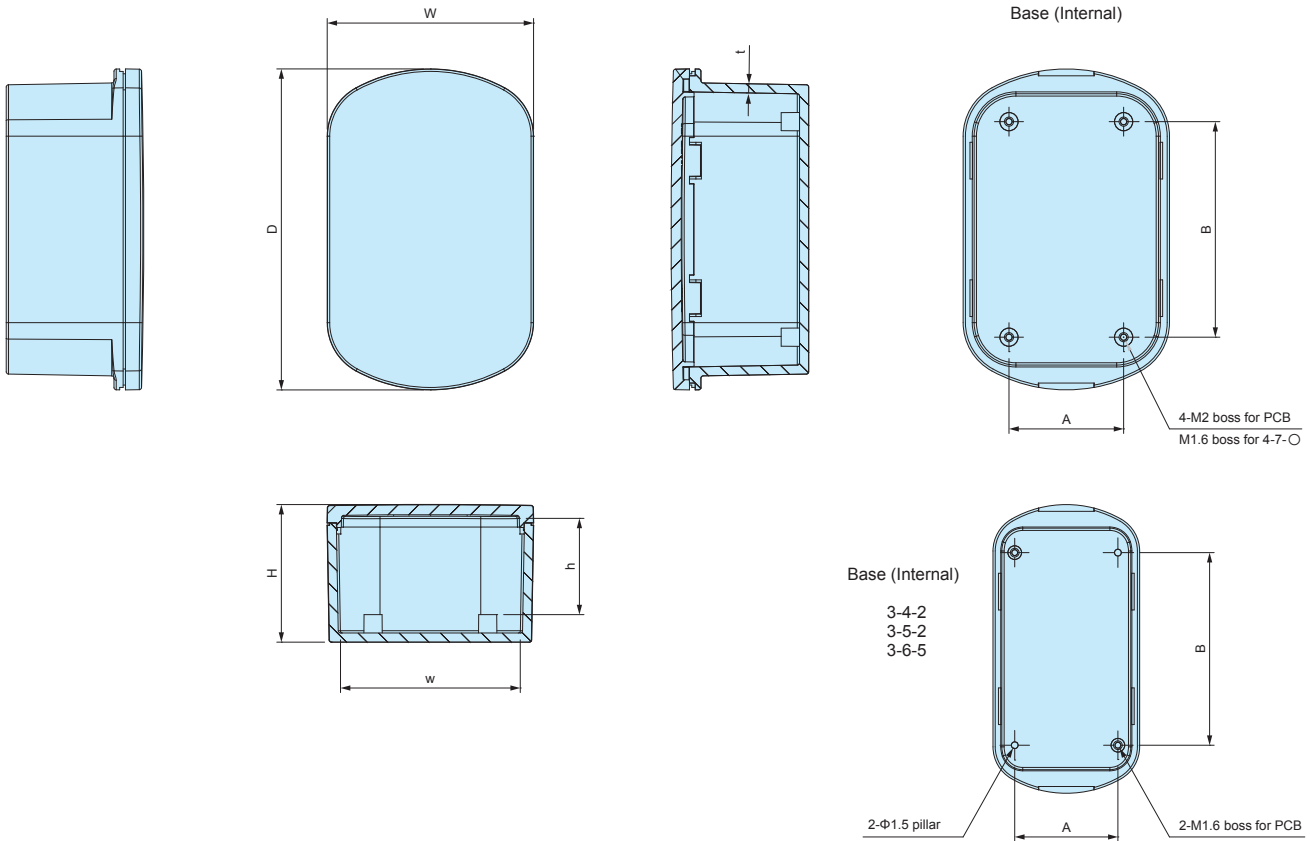


Product no. / Details

Product no.		External dimensions			Internal dimensions			Boss pitch		t	Weight (g)
● Black	● Off-white	W	D	H	w	d	h	A	B		
NEW SIC2- 4-1B	NEW SIC2- 4-1W	20	35	13	15.3	23.6	8.7	—	—	1.7	4.4
NEW SIC2- 5-1B	NEW SIC2- 5-1W	20	50	13	15.3	38.6	8.6	—	—	1.7	6.2
SIC3- 4-2B	SIC3- 4-2W	30	40	18	25.1	28.6	11.1	16.5	24	1.7	7.8
SIC3- 5-2B	SIC3- 5-2W	25	54	18	20.1	42.6	11.1	15.5	35	1.7	9.2
SIC3- 6-2B	SIC3- 6-2W	32	63	20	27.1	51.6	13	22.5	42	1.7	13.2
SIC4- 7-1B	SIC4- 7-1W	38	65	14	32.7	53.3	6.4	24	45.5	2	14.8
SIC4- 7-2B	SIC4- 7-2W	38	65	22	32.4	53	14.4	24	45.5	2	17.7
SIC5- 5-2B	SIC5- 5-2W	45	50	20	39.5	38.5	10.9	25	27	2	14.9
SIC5- 5-3B	SIC5- 5-3W	45	50	30	39.1	38.1	20.9	25	27	2	18.1
SIC5- 7-2B	SIC5- 7-2W	45	70	20	39.5	58.5	10.9	25	47	2	20.1
SIC5- 7-3B	SIC5- 7-3W	45	70	30	39.1	58.1	20.9	25	47	2	24.1
SIC5- 9-2B	SIC5- 9-2W	45	90	20	39.5	78.5	10.9	25	67	2	24.9
SIC5- 9-3B	SIC5- 9-3W	45	90	30	39.1	78.1	20.9	25	67	2	29.4
NEW SIC6- 7-3B	NEW SIC6- 7-3W	60	65	25	54.3	53.6	15.9	40	40	2	26.8
NEW SIC6- 7-4B	NEW SIC6- 7-4W	60	65	38	53.9	53.1	28.9	40	40	2	32.6
NEW SIC6- 9-3B	NEW SIC6- 9-3W	60	90	25	54.3	78.6	15.9	40	65	2	36.3
NEW SIC6- 9-4B	NEW SIC6- 9-4W	60	90	38	53.9	78.1	28.9	40	65	2	43.6
NEW SIC6-12-3B	NEW SIC6-12-3W	60	120	25	54.3	108.6	15.9	40	95	2	46.9
NEW SIC6-12-4B	NEW SIC6-12-4W	60	120	38	53.9	108.1	28.9	40	95	2	55.9

Accessories (Optional parts) COIN CELL BATTERY HOLDERS

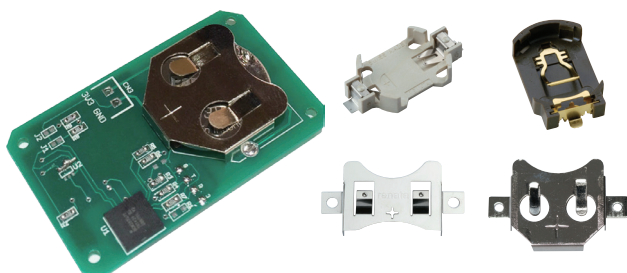


- Various coin cell battery holders can be utilized.
See coin cell battery holders on our website for more details.
- Please note that depending on the mounting location, PCB may not be able to be properly affixed on.

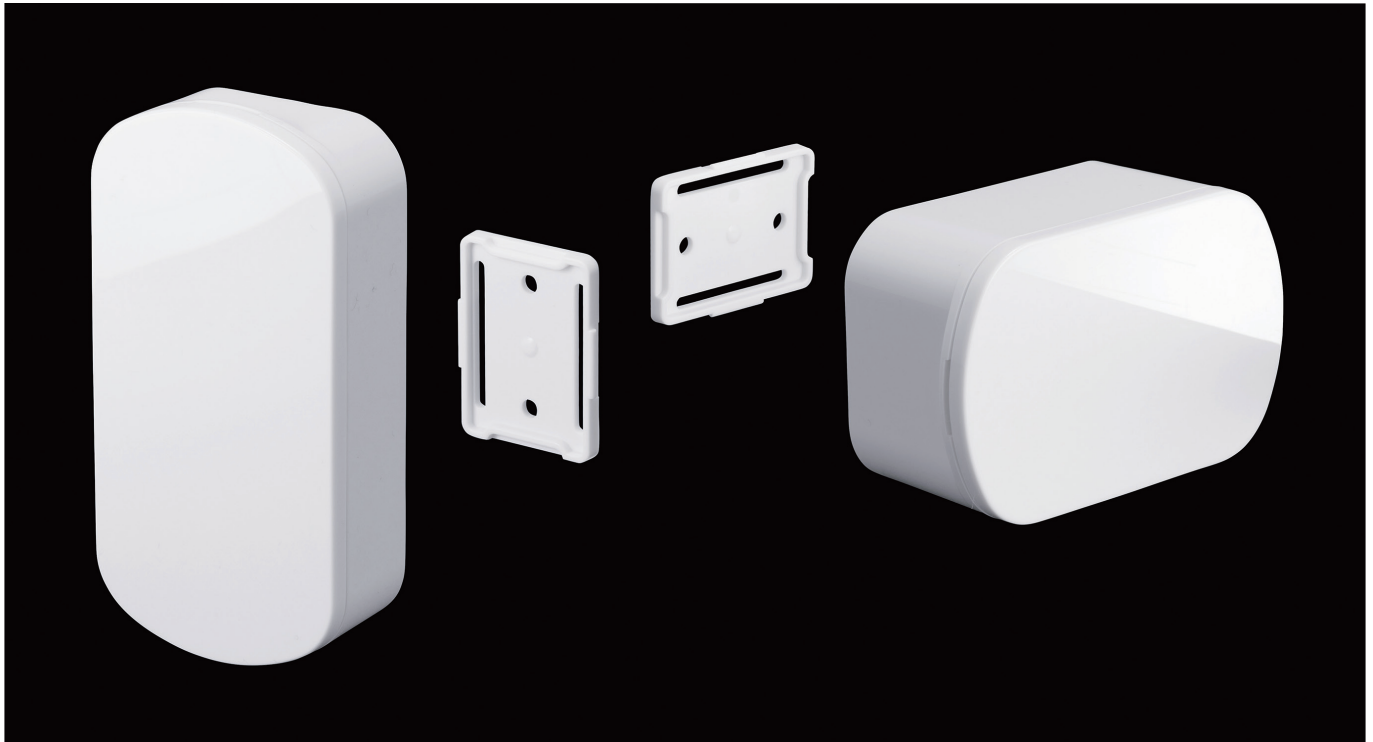

Technical Data

Protection class: IP40
Operating temperature: -30°C ~ +60°C

*May become brittle and break under impact when temperature is lowered close to -30°C.

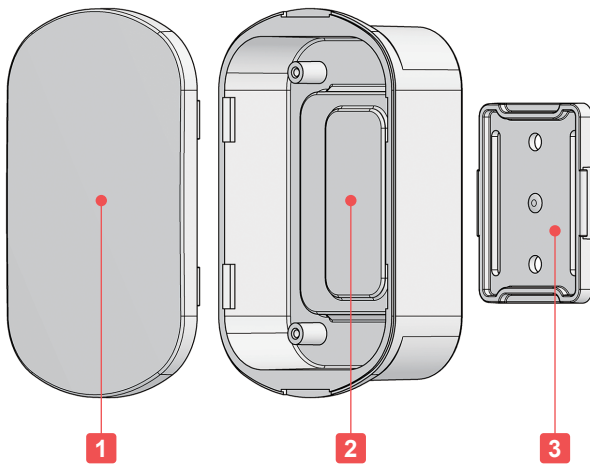


- 6 new sizes added for a total of 14 different sizes available for selection.
- Small rounded design plastic case ideal for use as IoT devices.
- Easily attached to, or detached from the wall by using the wall mounting bracket.
- Made of weather-resistant ASA material.
Suitable for devices intended to be used under direct sunlight.
- Optional universal PCB, PCB32-53 is compatible with SIM5-7-2 and 5-7-3 models. See PCB series on our website for more details.

Components

No.	Part name	Pcs	Material	Color / Finish
1	Cover	1	Weather-resistant ASA UL94HB	Off-white / Polished
2	Base	1	Weather-resistant ASA UL94HB	Off-white / Polished
3	Wall mounting bracket	1	Weather-resistant ASA UL94HB	Off-white / Polished

Bracket installation

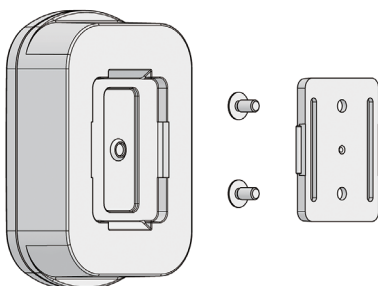


Accessories (Optional parts)



Rubber strain relief cord protector
CBS series
See page 385




PCB mounting screw EM-2
See page 398



Universal PCB PCB series
See website


SIM dimensions

■ DXF/DWG/PDF/STP drawings available on our website.

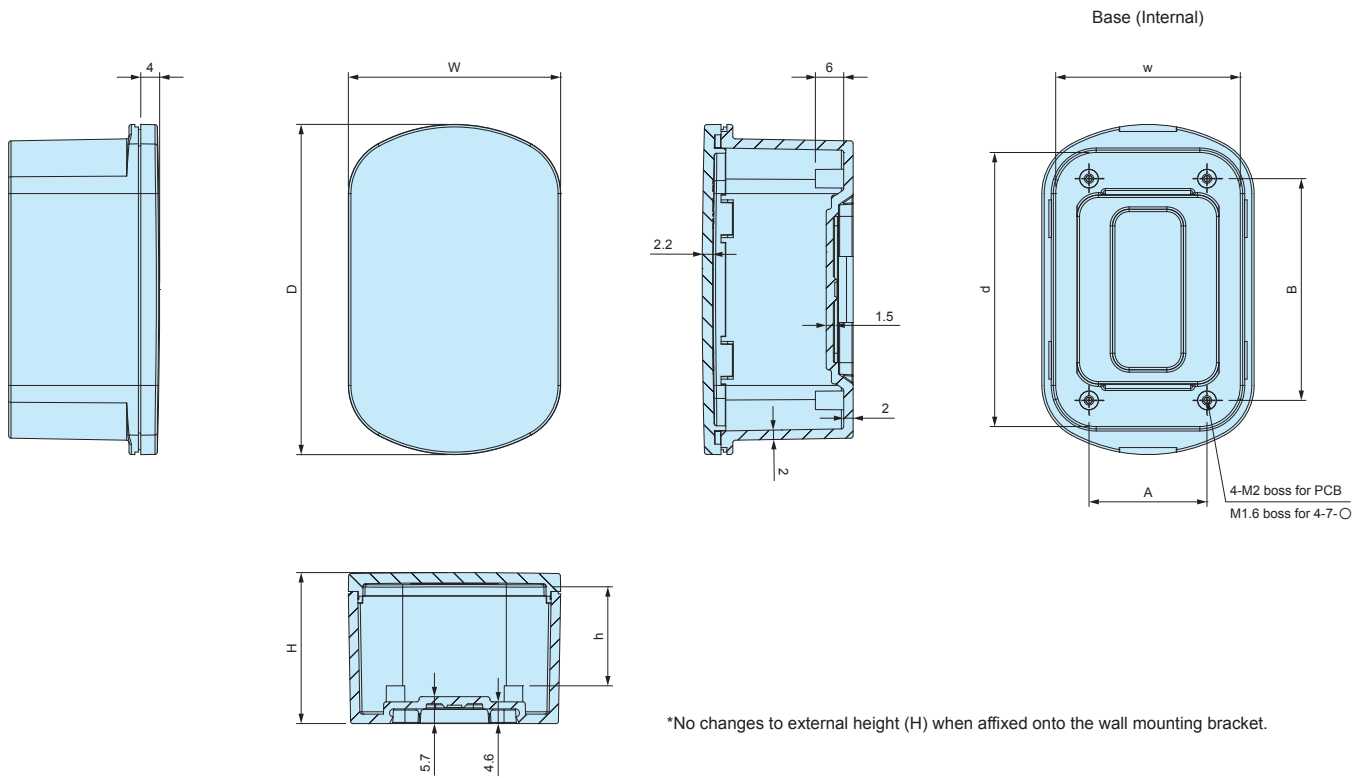

SIM6-9-3W ~ SIM6-12-4W

SIM4-7-2W ~ SIM6-7-4W

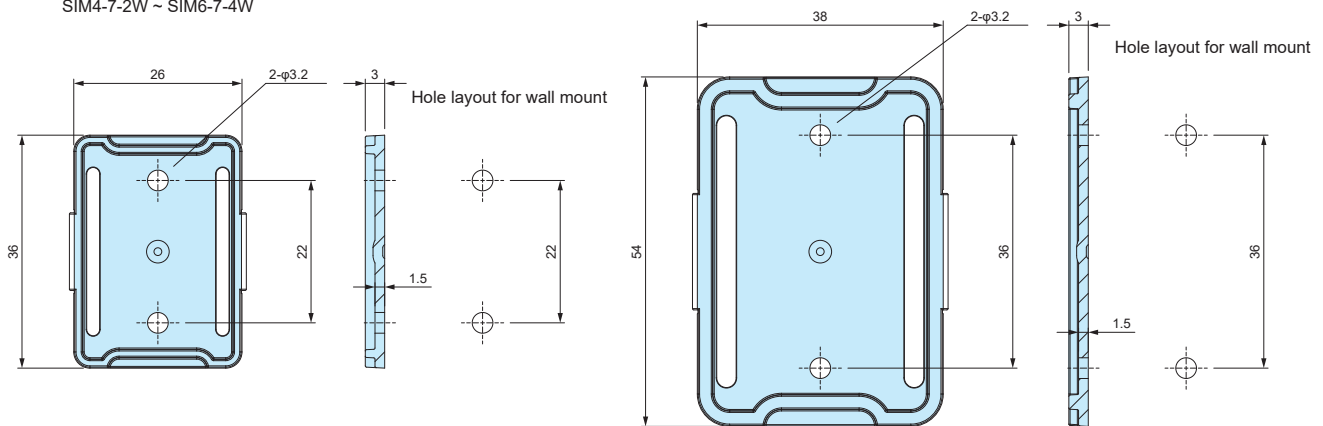

■ M3 screws for installation of bracket on walls are not included.

Product no. / Details

Product no.	External dimensions			Internal dimensions			Boss pitch		Weight (g)
	W	D	H	w	d	h	A	B	
SIM4- 7-2W	38	65	17	32.7	53.2	6.4	24	45.5	17.8
SIM4- 7-3W	38	65	25	32.4	52.9	14.4	24	45.5	20.7
SIM5- 5-2W	45	50	23	39.4	38.5	10.9	25	27	17.8
SIM5- 5-3W	45	50	33	39	38.1	20.9	25	27	20.9
SIM5- 7-2W	45	70	22	39.4	58.4	10.9	25	47	22.8
SIM5- 7-3W	45	70	32	39.1	58	20.9	25	47	25.9
SIM5- 9-2W	45	90	22	39.4	78.4	10.9	25	67	27.7
SIM5- 9-3W	45	90	32	39.1	78	20.9	25	67	32.3
NEW SIM6- 7-3W	60	65	27	54.2	53.5	15.9	40	40	29.3
NEW SIM6- 7-4W	60	65	40	53.8	53	28.9	40	40	34.9
NEW SIM6- 9-3W	60	90	27	54.2	78.5	15.9	40	65	40.9
NEW SIM6- 9-4W	60	90	40	53.8	78	28.9	40	65	47.9
NEW SIM6-12-3W	60	120	27	54.2	108.5	15.9	40	95	53.1
NEW SIM6-12-4W	60	120	40	53.8	108	28.9	40	95	62.1

CBS series**RUBBER STRAIN RELIEF CORD PROTECTOR****Application example**

Installed onto SIC series




Installed onto EX series

- A total of 8 different sizes available for selection.
- Strain relief cord protector helps relieve flex stress and prevents damage to cables.
※ Does not prevent cables from being dislodged.
- 2 types - round and flat - are available.
- Insert from the inner side of the case / panel of the enclosure.
- Made from high heat resistant silicone material.

Technical Data


Operating temperature:
-40°C ~ +100°C

Installation steps

- ① Insert into the mounting hole from the inside.
 - ② Thread the cable through the protector.
- ※ Protector must be installed first.

CBS dimensions

■ DXF/DWG/PDF drawings available on our website.

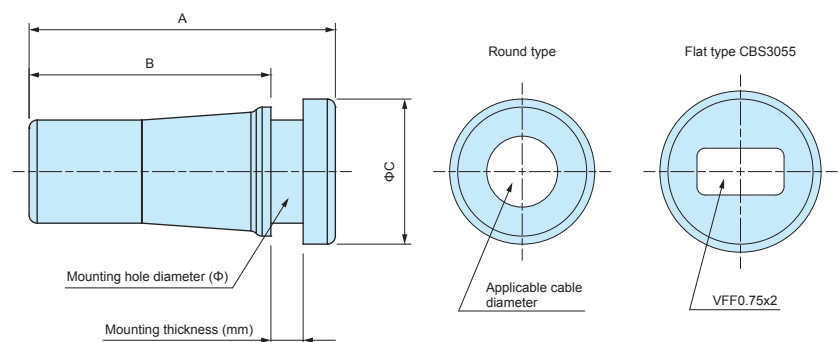**Product no. / Details**

Product no.		A	B	C	Applicable cable diameter / type	Mounting hole diameter (Φ)	Mounting thickness (mm)	Material	Pack of
● Black	● Off-white								
CBS3055-15B	CBS3055-15W	18.5	15	10	VFF0.75x2	7.6 ~ 7.8	1.5 ~ 2.0	Silicone	10
CBS3055-20B	CBS3055-20W	19	15	10	VFF0.75x2	7.6 ~ 7.8	2.0 ~ 2.5	Silicone	10
CBS35-15B	CBS35-15W	16.5	13	8	Φ3.5	5.6 ~ 5.8	1.5 ~ 2.0	Silicone	10
CBS35-20B	CBS35-20W	17	13	8	Φ3.5	5.6 ~ 5.8	2.0 ~ 2.5	Silicone	10
CBS45-15B	CBS45-15W	18.5	15	9	Φ4.5	6.6 ~ 6.8	1.5 ~ 2.0	Silicone	10
CBS45-20B	CBS45-20W	19	15	9	Φ4.5	6.6 ~ 6.8	2.0 ~ 2.5	Silicone	10
CBS60-15B	CBS60-15W	20.5	17	10.5	Φ6.0	8.1 ~ 8.3	1.5 ~ 2.0	Silicone	10
CBS60-20B	CBS60-20W	21	17	10.5	Φ6.0	8.1 ~ 8.3	2.0 ~ 2.5	Silicone	10

DST series**DOUBLE-SIDED MOUNTING TAPE**

- Super strong double-sided mounting tape with excellent cold and heat resistance.
- Allow cases to be attached onto any place.
- Easily attached onto walls where holes cannot be drilled.
- Can be used with a range of products, such as small IoT type enclosures.


- Please ensure that surface is cleaned and grease-free before adhering.
- Once removed, it cannot be adhered on again.

Notes:


Due to the strong adhesive strength,
do ensure that the surface or product is suitable to be adhered onto.

Technical Data

Operating temperature:
-30°C ~ +200°C

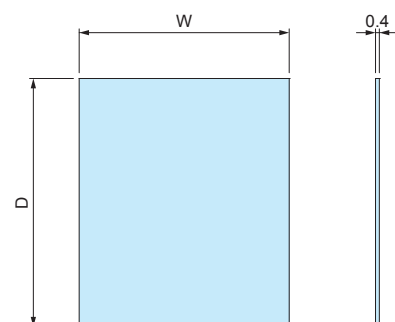**Adhesion Performance (90° peel adhesion)**

90° direction peel force N/cm	Stainless steel (SUS304BA)	24
	Aluminium (A1050P)	21
	Bonded steel plate (SECC)	30
	ABS	10
	Acrylic (PMMA)	16
	Polypropylene	6
	Polyethylene (HDPE)	3
	Glass	27

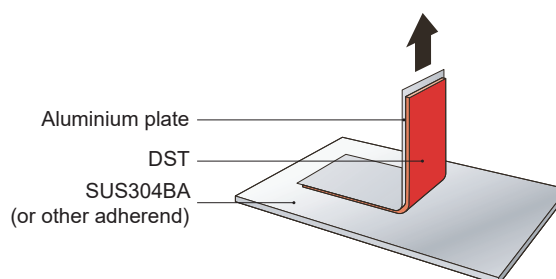**[Test Method]**

Backed with specially treated Aluminium foil (130 μ m), crimped with a 10kg steel roller back and forth twice, cured at room temperature for 72 hours, tensile speed 300mm/min.

*Data values listed are test results based on the test conditions, and are to be used as reference only.

*Adhesive strength and other physical properties vary depending on the adherend, bonding and curing conditions, and other factors.

Product no. / Details

■ Material / Color: Acrylic foam base, acrylic adhesive / gray

Product no.	W	D	Suitable models	Weight (g)	Pack of
NEW DST14-22	14	22	SIC2-4-1 SW-30	0.3 / pc	5
NEW DST14-36	14	36	SIC2-5-1	0.4 / pc	5
DST18-40	18	40	SIC3-5-2 SW-(T)40 • 60	0.7 / pc	5
DST22-26	22	26	SIC3-4-2 SW-(T)40	0.5 / pc	5
DST24-48	24	48	SIC3-6-2 SW-50 • 53 • (N)(T)55 • (N)65 TW/TWN4-2-5 • 4-2-6 • 4-2-8	0.8 / pc	5

LCT•LCS•LC•LCE HAND-HELD PLASTIC CASE

Hand-held case suitable for industrial measuring equipment, wireless communication devices and medical equipment.

9 different sizes with 8 different battery compartment types line-up available.

Consisting of a line-up of 4 different series: LC - plastic case, LCT - case with shockproof silicone cover, LCS - case with silicone cover, and LCE - EMC shielded plastic case.

LCT Plastic Case with Shockproof Silicone Cover - 4 Rugged Shockproof Silicone Cover Colors



LCS Plastic Case with Silicone Cover - 5 Silicone Cover Colors



CUSTOMIZATION



Machining



Custom cut on silicone cover



Custom color, custom shaped silicone cover



Digital printed overlay



APPLICATION EXAMPLE

Metal Coating Thickness Gauge



Solar Panel Trouble Checker



Solar Cell Connection Checker



Digital Pressure Gauge Setter



Fluorescent Portable Dissolved Oxygen Meter



Distribution Transformer Tester



Network Partial Discharge Checker



Radiation Survey Meter



Mini Radiation Survey Meter



Wireless Voltage Probe



Portable Anemometer



Ultrasonic Thickness Gauge




Hyperhidrosis Treatment Device



RF Scope



Satellite Broadcasting Signal Generator

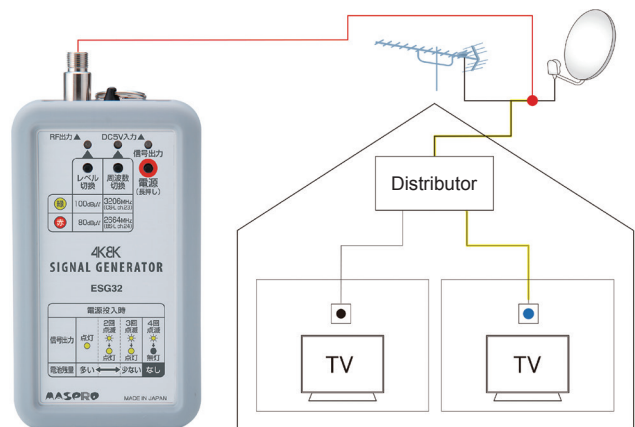

Onboard Programmer



Code Debugger





Technical Data

Protection class: IP40
Operating temperature: -10°C ~ +60°C

- Plastic case with shockproof silicone cover. Protects the device from various impact.
- Manufactured with flame-resistant ABS UL94V-0 material. Selectable from a range of battery compartment types.
- Positive (+) / Negative (-) pole marks are incised on the inside of the battery compartments.
- Suitable for measuring instruments, test devices, wireless communication devices, medical devices and more.

Battery compartment type



No battery compartment type



Components

No.	Part name	Pcs	Material	Color / Finish
1	Top cover	1	ABS UL94V-0	Off-white • Dark gray
2	Bottom cover	1	ABS UL94V-0	Off-white • Dark gray
3	Panel	1	ABS UL94V-0	Off-white • Dark gray
4	Self-tapping screw	4	Steel M2.6	Nickel plated • Black trivalent chromate
5	Battery cover	1	ABS UL94V-0	Off-white • Dark gray
6	Battery contact	1 set	Brass	Nickel plated
	Battery snap • Cushion sponge (only for 9V models)	1 set	Brass : PVC • Polyurethane foam (UL94HF-1)	Nickel plated • Black
7	Silicone cover	1	Silicone	Orange • Green • Navy • Dark gray

Accessories (Optional parts)



Tapping standoff TPS series
See page 397



PCB mounting screw EM-2.3
See page 398



TORX screw MR series
See page 398



Key ring CR-20
See page 389



Strap STP series
See page 389

Battery Compartment Type

Type	N None	F2 AAA x 2	F3 AAA x 3	F4 AAA x 4	F6 AAA x 6	M2 AA x 2	M3 AA x 3	M4 AA x 4	9V 9V x 1
Battery compartment									

Color Type

Code	D O Dark gray / Orange	D G Dark gray / Green	D N Dark gray / Navy	D D Dark gray / Dark gray
Color				
Code	W O Off-white / Orange	W G Off-white / Green	W N Off-white / Navy	W D Off-white / Dark gray
Color				

Product no. / Details


■ Please suffix color code at the end of the product number.

Product no.	W	H	D	Battery compartment	Weight (g)
LCT115 -N -□□	76(69)	28(19.5)	121.9(115)	None	123.5
LCT115 -F2 -□□	76(69)	28(19.5)	121.9(115)	AAA x 2	128
LCT115 -F3 -□□	76(69)	28(19.5)	121.9(115)	AAA x 3	130
LCT115H-N -□□	76(69)	36.5(28)	121.9(115)	None	141
LCT115H-F2 -□□	76(69)	36.5(28)	121.9(115)	AAA x 2	145.5
LCT115H-F3 -□□	76(69)	36.5(28)	121.9(115)	AAA x 3	147
LCT115H-M2-□□	76(69)	36.5(28)	121.9(115)	AA x 2	149.5
LCT115H-9V-□□	76(69)	36.5(28)	121.9(115)	9V x 1	149
LCT135 -N -□□	85(76)	40(27)	143.9(135)	None	210.5
LCT135 -F4 -□□	85(76)	40(27)	143.9(135)	AAA x 4	225.5
LCT135 -M2-□□	85(76)	40(27)	143.9(135)	AA x 2	223.5
LCT135 -M3-□□	85(76)	40(27)	143.9(135)	AA x 3	229
LCT135 -9V-□□	85(76)	40(27)	143.9(135)	9V x 1	227
LCT135H-N -□□	85(76)	48(35)	143.9(135)	None	231.5
LCT135H-F4 -□□	85(76)	48(35)	143.9(135)	AAA x 4	246
LCT135H-M2-□□	85(76)	48(35)	143.9(135)	AA x 2	245
LCT135H-M3-□□	85(76)	48(35)	143.9(135)	AA x 3	250
LCT135H-9V-□□	85(76)	48(35)	143.9(135)	9V x 1	247.5
LCT145 -N -□□	105(96)	40(27)	153.9(145)	None	258.5
LCT145 -F6 -□□	105(96)	40(27)	153.9(145)	AAA x 6	278.5
LCT145 -M2-□□	105(96)	40(27)	153.9(145)	AA x 2	272.5
LCT145 -M4-□□	105(96)	40(27)	153.9(145)	AA x 4	279.5
LCT145H-N -□□	105(96)	48(35)	153.9(145)	None	282
LCT145H-F6 -□□	105(96)	48(35)	153.9(145)	AAA x 6	302.5
LCT145H-M2-□□	105(96)	48(35)	153.9(145)	AA x 2	296
LCT145H-M4-□□	105(96)	48(35)	153.9(145)	AA x 4	303
LCT165 -N -□□	89(80)	40(27)	173.9(165)	None	263.5
LCT165 -M4-□□	89(80)	40(27)	173.9(165)	AA x 4	283
LCT165H-N -□□	89(80)	48(35)	173.9(165)	None	286
LCT165H-M4-□□	89(80)	48(35)	173.9(165)	AA x 4	305

■ () value = enclosure dimension.

Silicone cover dimensions


■ DXF/DWG/PDF drawings available on our website.

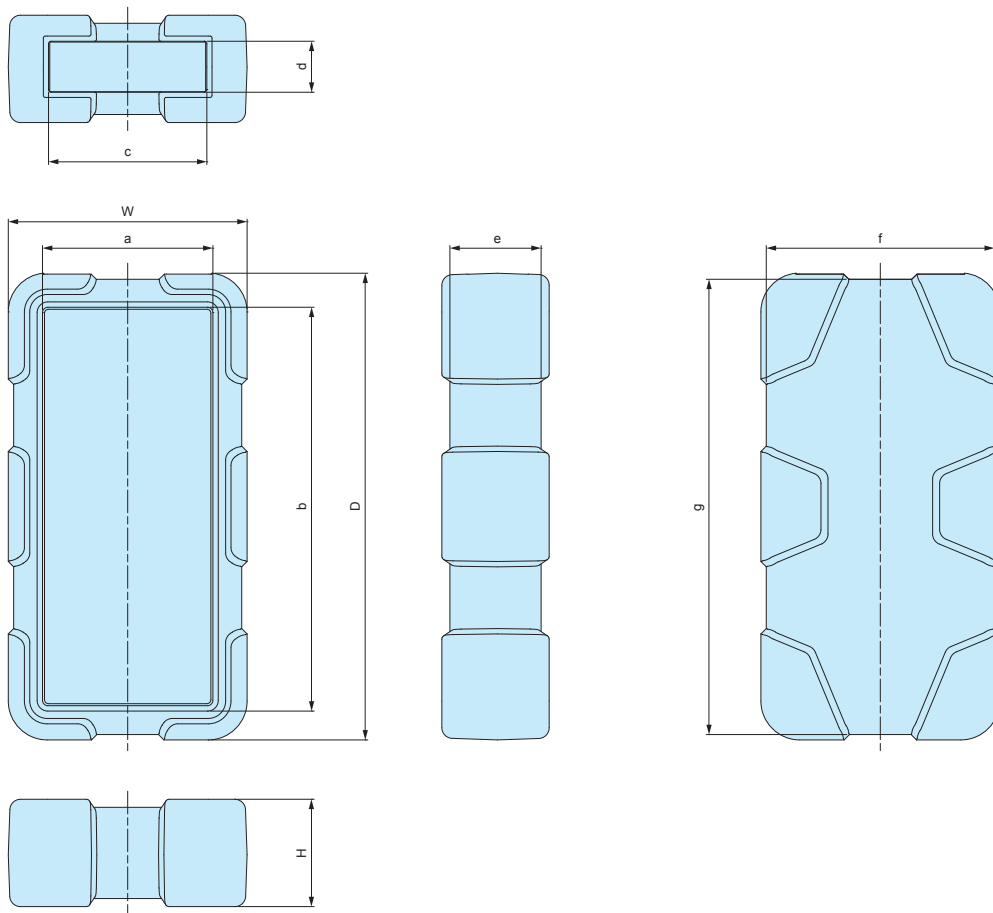

Product no.	W	H	D	a	b	c	d	e	f	g
LCT115 -N -□□	76	28	121.9	55.5	101.5	48.3	12	24	72	117.8
LCT115 -F2 -□□	76	28	121.9	55.5	101.5	48.3	12	24	72	117.8
LCT115 -F3 -□□	76	28	121.9	55.5	101.5	48.3	12	24	72	117.8
LCT115H -N -□□	76	36.5	121.9	55.5	101.5	48.3	20.5	32.5	72	117.8
LCT115H -F2 -□□	76	36.5	121.9	55.5	101.5	48.3	20.5	32.5	72	117.8
LCT115H -F3 -□□	76	36.5	121.9	55.5	101.5	48.3	20.5	32.5	72	117.8
LCT115H -M2 -□□	76	36.5	121.9	55.5	101.5	48.3	20.5	32.5	72	117.8
LCT115H -9V -□□	76	36.5	121.9	55.5	101.5	48.3	20.5	32.5	72	117.8
LCT135 -N -□□	85	40	143.9	59.5	118.5	55	19	34	81	139.7
LCT135 -F4 -□□	85	40	143.9	59.5	118.5	55	19	34	81	139.7
LCT135 -M2 -□□	85	40	143.9	59.5	118.5	55	19	34	81	139.7
LCT135 -M3 -□□	85	40	143.9	59.5	118.5	55	19	34	81	139.7
LCT135 -9V -□□	85	40	143.9	59.5	118.5	55	19	34	81	139.7
LCT135H -N -□□	85	48	143.9	59.5	118.5	55	27	42	81	139.6
LCT135H -F4 -□□	85	48	143.9	59.5	118.5	55	27	42	81	139.6
LCT135H -M2 -□□	85	48	143.9	59.5	118.5	55	27	42	81	139.6
LCT135H -M3 -□□	85	48	143.9	59.5	118.5	55	27	42	81	139.6
LCT135H -9V -□□	85	48	143.9	59.5	118.5	55	27	42	81	139.6
LCT145 -N -□□	105	40	153.9	76.5	125.5	71	19	34	101	149.7
LCT145 -F6 -□□	105	40	153.9	76.5	125.5	71	19	34	101	149.7
LCT145 -M2 -□□	105	40	153.9	76.5	125.5	71	19	34	101	149.7
LCT145 -M4 -□□	105	40	153.9	76.5	125.5	71	19	34	101	149.7
LCT145H -N -□□	105	48	153.9	76.5	125.5	71	27	42	101	149.7
LCT145H -F6 -□□	105	48	153.9	76.5	125.5	71	27	42	101	149.7
LCT145H -M2 -□□	105	48	153.9	76.5	125.5	71	27	42	101	149.7
LCT145H -M4 -□□	105	48	153.9	76.5	125.5	71	27	42	101	149.7
LCT165 -N -□□	89	40	173.9	63.5	148.5	59	19	34	85	169.7
LCT165 -M4 -□□	89	40	173.9	63.5	148.5	59	19	34	85	169.7
LCT165H -N -□□	89	48	173.9	63.5	148.5	59	27	42	85	169.6
LCT165H -M4 -□□	89	48	173.9	63.5	148.5	59	27	42	85	169.6

Enclosure dimensions

■ DXF/DWG/PDF/STP drawings available on our website.

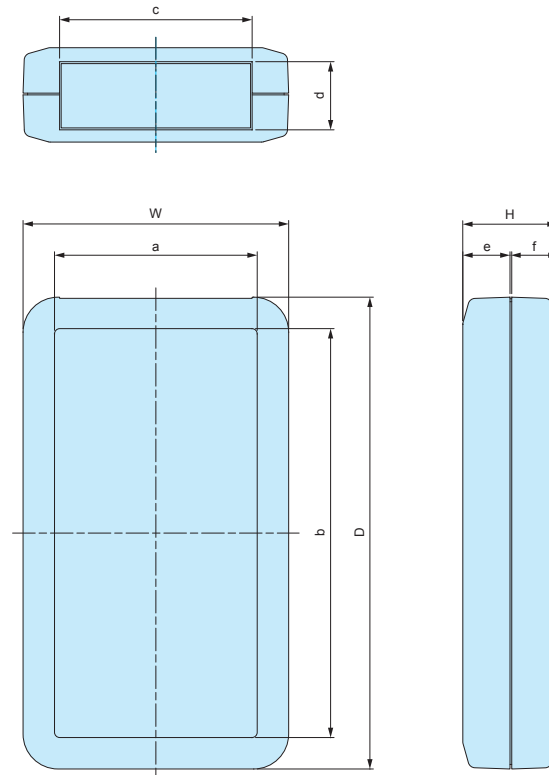

■ Please suffix color code at the end of the product number.

Product no.	W	H	D	a	b	c	d	e	f	Battery compartment
LCT115 -N -□□	69	19.5	115	54	100	48.1	12	10	9	None
LCT115 -F2 -□□	69	19.5	115	54	100	48.1	12	10	9	AAA x 2
LCT115 -F3 -□□	69	19.5	115	54	100	48.1	12	10	9	AAA x 3
LCT115H -N -□□	69	28	115	54	100	48.1	20.5	18.5	9	None
LCT115H -F2 -□□	69	28	115	54	100	48.1	20.5	18.5	9	AAA x 2
LCT115H -F3 -□□	69	28	115	54	100	48.1	20.5	18.5	9	AAA x 3
LCT115H -M2 -□□	69	28	115	54	100	48.1	20.5	18.5	9	AA x 2
LCT115H -9V -□□	69	28	115	54	100	48.1	20.5	18.5	9	9V x 1
LCT135 -N -□□	76	27	135	58	117	55.1	19.5	13.5	13	None
LCT135 -F4 -□□	76	27	135	58	117	55.1	19.5	13.5	13	AAA x 4
LCT135 -M2 -□□	76	27	135	58	117	55.1	19.5	13.5	13	AA x 2
LCT135 -M3 -□□	76	27	135	58	117	55.1	19.5	13.5	13	AA x 3
LCT135 -9V -□□	76	27	135	58	117	55.1	19.5	13.5	13	9V x 1
LCT135H -N -□□	76	35	135	58	117	55.1	27.5	21.5	13	None
LCT135H -F4 -□□	76	35	135	58	117	55.1	27.5	21.5	13	AAA x 4
LCT135H -M2 -□□	76	35	135	58	117	55.1	27.5	21.5	13	AA x 2
LCT135H -M3 -□□	76	35	135	58	117	55.1	27.5	21.5	13	AA x 3
LCT135H -9V -□□	76	35	135	58	117	55.1	27.5	21.5	13	9V x 1
LCT145 -N -□□	96	27	145	75	124	71.1	19.5	14.5	12	None
LCT145 -F6 -□□	96	27	145	75	124	71.1	19.5	14.5	12	AAA x 6
LCT145 -M2 -□□	96	27	145	75	124	71.1	19.5	14.5	12	AA x 2
LCT145 -M4 -□□	96	27	145	75	124	71.1	19.5	14.5	12	AA x 4
LCT145H -N -□□	96	35	145	75	124	71.1	27.5	22.5	12	None
LCT145H -F6 -□□	96	35	145	75	124	71.1	27.5	22.5	12	AAA x 6
LCT145H -M2 -□□	96	35	145	75	124	71.1	27.5	22.5	12	AA x 2
LCT145H -M4 -□□	96	35	145	75	124	71.1	27.5	22.5	12	AA x 4
LCT165 -N -□□	80	27	165	62	147	59.1	19.5	13.5	13	None
LCT165 -M4 -□□	80	27	165	62	147	59.1	19.5	13.5	13	AA x 4
LCT165H -N -□□	80	35	165	62	147	59.1	27.5	21.5	13	None
LCT165H -M4 -□□	80	35	165	62	147	59.1	27.5	21.5	13	AA x 4




Technical Data


Protection class: IP40
Operating temperature: -10°C ~ +60°C

- Plastic case with silicone cover providing not only comfortable and anti-slip grip, but also protection from drop impact.
- Manufactured with flame-resistant ABS UL94V-0. Several battery compartment types are available.
- Positive (+) / negative (-) pole mark are incised on the inside of the battery compartments.
- Suitable for measuring instruments, test devices, wireless communication devices, medical devices and more.

Battery compartment type

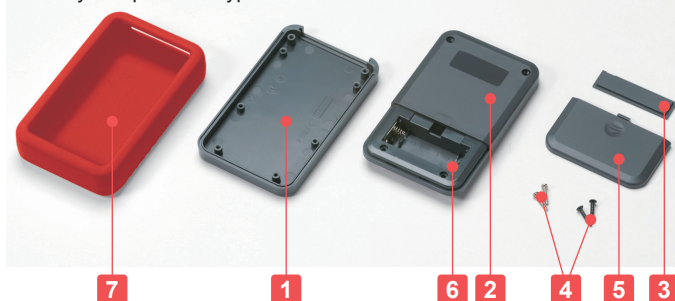

No battery compartment type

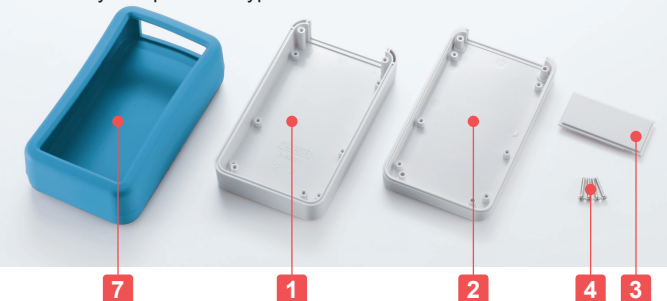

Components

No.	Part name	Pcs	Material	Color / Finish
1	Top cover	1	ABS UL94V-0	Off-white • Dark gray
2	Bottom cover	1	ABS UL94V-0	Off-white • Dark gray
3	Panel	1	ABS UL94V-0	Off-white • Dark gray
4	Self-tapping screw	4	Steel M2.6	Nickel plated • Black trivalent chromate
5	Battery cover	1	ABS UL94V-0	Off-white • Dark gray
6	Battery contact	1 set	Brass	Nickel plated
	Battery snap • Cushion sponge (only for 9V models)	1 set	Brass : PVC • Polyurethane foam (UL94HF-1)	Nickel plated • Black
7	Silicone cover	1	Silicone	Red • Green • Blue • Light gray • Dark gray

Accessories (Optional parts)



Tapping standoff TPS series
See page 397



PCB mounting screw EM-2.3
See page 398



TORX screw MR series
See page 398



Key ring CR-20
See page 389



Strap STP series
See page 389

Battery Compartment Type

Type	N None	F2 AAA x 2	F3 AAA x 3	F4 AAA x 4	F6 AAA x 6	M2 AA x 2	M3 AA x 3	M4 AA x 4	9V 9V x 1
Battery compartment									

Color Type

Code	D R Dark gray / Red	D G Dark gray / Green	D B Dark gray / Blue	D D Dark gray / Dark gray	D L Dark gray / Light gray
Color					
Code	W R Off-white / Red	W G Off-white / Green	W B Off-white / Blue	W D Off-white / Dark gray	W L Off-white / Light gray
Color					

Product no. / Details


■ Please suffix color code at the end of the product number.

Product no.	W	H	D	Battery compartment	Weight (g)
LCS115 -N -□□	74(69)	24(19.5)	120(115)	None	113
LCS115 -F2 -□□	74(69)	24(19.5)	120(115)	AAA x 2	117.5
LCS115 -F3 -□□	74(69)	24(19.5)	120(115)	AAA x 3	119.5
LCS115H -N -□□	74(69)	32.5(28)	120(115)	None	130
LCS115H -F2 -□□	74(69)	32.5(28)	120(115)	AAA x 2	134.5
LCS115H -F3 -□□	74(69)	32.5(28)	120(115)	AAA x 3	136
LCS115H -M2 -□□	74(69)	32.5(28)	120(115)	AA x 2	138.5
LCS115H -9V -□□	74(69)	32.5(28)	120(115)	9V x 1	138
LCS135 -N -□□	81(76)	32(27)	141(135)	None	165
LCS135 -F4 -□□	81(76)	32(27)	141(135)	AAA x 4	180
LCS135 -M2 -□□	81(76)	32(27)	141(135)	AA x 2	178
LCS135 -M3 -□□	81(76)	32(27)	141(135)	AA x 3	183.5
LCS135 -9V -□□	81(76)	32(27)	141(135)	9V x 1	181.5
LCS135H -N -□□	81(76)	40(35)	141(135)	None	183
LCS135H -F4 -□□	81(76)	40(35)	141(135)	AAA x 4	197.5
LCS135H -M2 -□□	81(76)	40(35)	141(135)	AA x 2	196.5
LCS135H -M3 -□□	81(76)	40(35)	141(135)	AA x 3	201.5
LCS135H -9V -□□	81(76)	40(35)	141(135)	9V x 1	199
LCS145 -N -□□	101(96)	32(27)	151(145)	None	202
LCS145 -F6 -□□	101(96)	32(27)	151(145)	AAA x 6	222
LCS145 -M2 -□□	101(96)	32(27)	151(145)	AA x 2	216
LCS145 -M4 -□□	101(96)	32(27)	151(145)	AA x 4	223
LCS145H -N -□□	101(96)	40(35)	151(145)	None	224
LCS145H -F6 -□□	101(96)	40(35)	151(145)	AAA x 6	244.5
LCS145H -M2 -□□	101(96)	40(35)	151(145)	AA x 2	238
LCS145H -M4 -□□	101(96)	40(35)	151(145)	AA x 4	245
LCS165 -N -□□	85(80)	32(27)	171(165)	None	203
LCS165 -M4 -□□	85(80)	32(27)	171(165)	AA x 4	222.5
LCS165H -N -□□	85(80)	40(35)	171(165)	None	220.5
LCS165H -M4 -□□	85(80)	40(35)	171(165)	AA x 4	239.5

■ () value = enclosure dimension.

Silicone cover dimensions

■ DXF/DWG/PDF drawings available on our website.

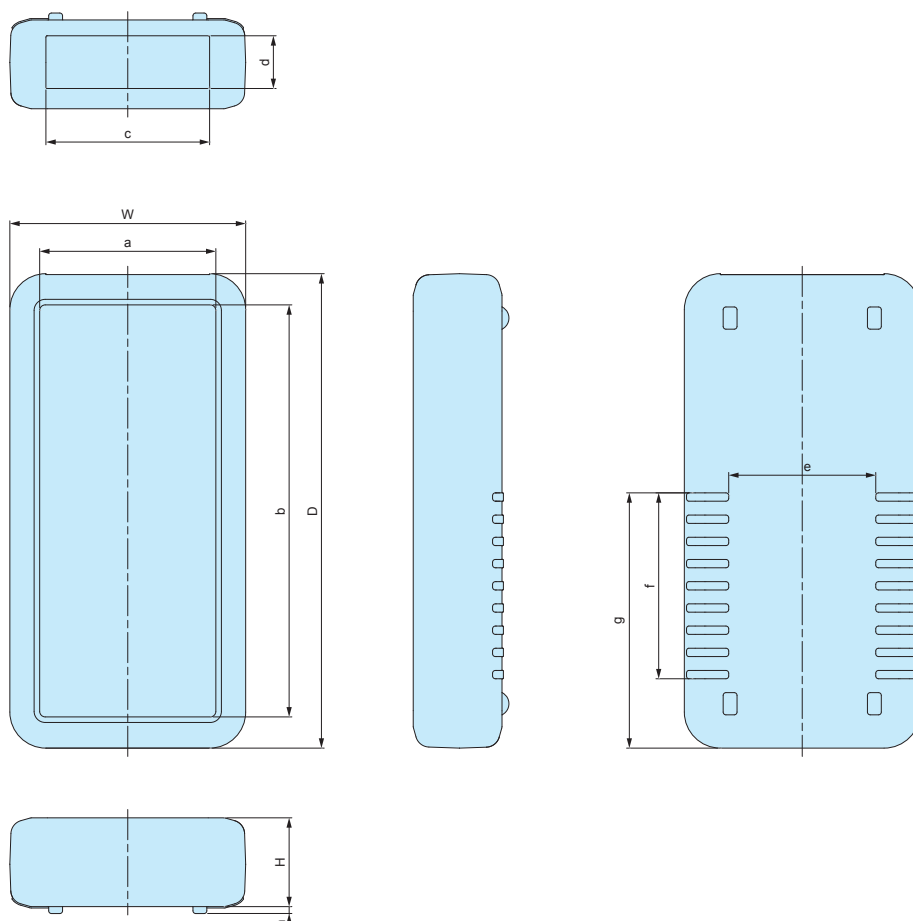


■ Please suffix color code at the end of the product number.

Product no.	W	H	D	a	b	c	d	e	f	g	h
LCS115 -N -□□	74	24	120	55.5	101.5	48.3	12	46	44.5	60.5	2
LCS115 -F2 -□□	74	24	120	55.5	101.5	48.3	12	46	44.5	60.5	2
LCS115 -F3 -□□	74	24	120	55.5	101.5	48.3	12	46	44.5	60.5	2
LCS115H -N -□□	74	32.5	120	55.5	101.5	48.3	20.5	46	44.5	60.5	2
LCS115H -F2 -□□	74	32.5	120	55.5	101.5	48.3	20.5	46	44.5	60.5	2
LCS115H -F3 -□□	74	32.5	120	55.5	101.5	48.3	20.5	46	44.5	60.5	2
LCS115H -M2 -□□	74	32.5	120	55.5	101.5	48.3	20.5	46	44.5	60.5	2
LCS115H -9V -□□	74	32.5	120	55.5	101.5	48.3	20.5	46	44.5	60.5	2
LCS135 -N -□□	81	32	141	59.5	118.5	55	19	53	59	79	2.5
LCS135 -F4 -□□	81	32	141	59.5	118.5	55	19	53	59	79	2.5
LCS135 -M2 -□□	81	32	141	59.5	118.5	55	19	53	59	79	2.5
LCS135 -M3 -□□	81	32	141	59.5	118.5	55	19	53	59	79	2.5
LCS135 -9V -□□	81	32	141	59.5	118.5	55	19	53	59	79	2.5
LCS135H -N -□□	81	40	141	59.5	118.5	55	27	53	59	79	2.5
LCS135H -F4 -□□	81	40	141	59.5	118.5	55	27	53	59	79	2.5
LCS135H -M2 -□□	81	40	141	59.5	118.5	55	27	53	59	79	2.5
LCS135H -M3 -□□	81	40	141	59.5	118.5	55	27	53	59	79	2.5
LCS135H -9V -□□	81	40	141	59.5	118.5	55	27	53	59	79	2.5
LCS145 -N -□□	101	32	151	76.5	125.5	71	19	71	59	81	2.5
LCS145 -F6 -□□	101	32	151	76.5	125.5	71	19	71	59	81	2.5
LCS145 -M2 -□□	101	32	151	76.5	125.5	71	19	71	59	81	2.5
LCS145 -M4 -□□	101	32	151	76.5	125.5	71	19	71	59	81	2.5
LCS145H -N -□□	101	40	151	76.5	125.5	71	27	71	59	81	2.5
LCS145H -F6 -□□	101	40	151	76.5	125.5	71	27	71	59	81	2.5
LCS145H -M2 -□□	101	40	151	76.5	125.5	71	27	71	59	81	2.5
LCS145H -M4 -□□	101	40	151	76.5	125.5	71	27	71	59	81	2.5
LCS165 -N -□□	85	32	171	63.5	148.5	59	19	53	67	92	2.5
LCS165 -M4 -□□	85	32	171	63.5	148.5	59	19	53	67	92	2.5
LCS165H -N -□□	85	40	171	63.5	148.5	59	27	53	67	92	2.5
LCS165H -M4 -□□	85	40	171	63.5	148.5	59	27	53	67	92	2.5

Enclosure dimensions

■ DXF/DWG/PDF/STP drawings available on our website.

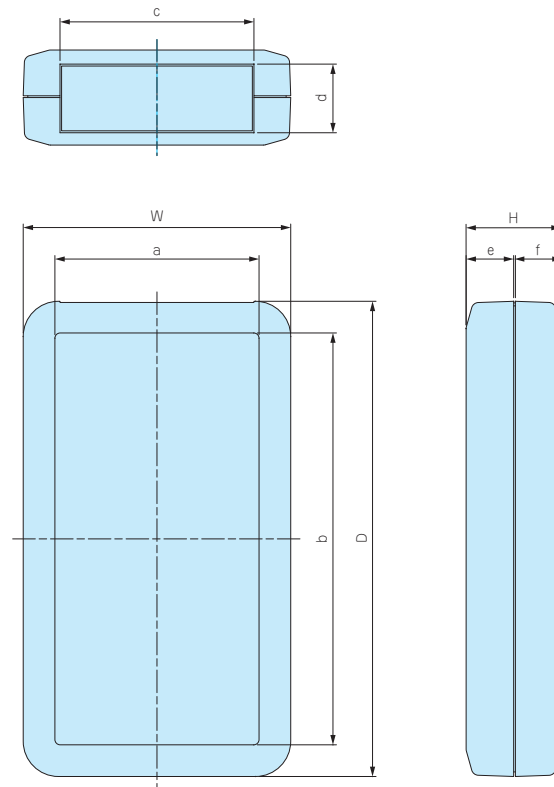

■ Please suffix color code at the end of the product number.

Product no.	W	H	D	a	b	c	d	e	f	Battery compartment
LCS115 -N -□□	69	19.5	115	54	100	48.1	12	10	9	None
LCS115 -F2 -□□	69	19.5	115	54	100	48.1	12	10	9	AAA x 2
LCS115 -F3 -□□	69	19.5	115	54	100	48.1	12	10	9	AAA x 3
LCS115H -N -□□	69	28	115	54	100	48.1	20.5	18.5	9	None
LCS115H -F2 -□□	69	28	115	54	100	48.1	20.5	18.5	9	AAA x 2
LCS115H -F3 -□□	69	28	115	54	100	48.1	20.5	18.5	9	AAA x 3
LCS115H -M2 -□□	69	28	115	54	100	48.1	20.5	18.5	9	AA x 2
LCS115H -9V -□□	69	28	115	54	100	48.1	20.5	18.5	9	9V x 1
LCS135 -N -□□	76	27	135	58	117	55.1	19.5	13.5	13	None
LCS135 -F4 -□□	76	27	135	58	117	55.1	19.5	13.5	13	AAA x 4
LCS135 -M2 -□□	76	27	135	58	117	55.1	19.5	13.5	13	AA x 2
LCS135 -M3 -□□	76	27	135	58	117	55.1	19.5	13.5	13	AA x 3
LCS135 -9V -□□	76	27	135	58	117	55.1	19.5	13.5	13	9V x 1
LCS135H -N -□□	76	35	135	58	117	55.1	27.5	21.5	13	None
LCS135H -F4 -□□	76	35	135	58	117	55.1	27.5	21.5	13	AAA x 4
LCS135H -M2 -□□	76	35	135	58	117	55.1	27.5	21.5	13	AA x 2
LCS135H -M3 -□□	76	35	135	58	117	55.1	27.5	21.5	13	AA x 3
LCS135H -9V -□□	76	35	135	58	117	55.1	27.5	21.5	13	9V x 1
LCS145 -N -□□	96	27	145	75	124	71.1	19.5	14.5	12	None
LCS145 -F6 -□□	96	27	145	75	124	71.1	19.5	14.5	12	AAA x 6
LCS145 -M2 -□□	96	27	145	75	124	71.1	19.5	14.5	12	AA x 2
LCS145 -M4 -□□	96	27	145	75	124	71.1	19.5	14.5	12	AA x 4
LCS145H -N -□□	96	35	145	75	124	71.1	27.5	22.5	12	None
LCS145H -F6 -□□	96	35	145	75	124	71.1	27.5	22.5	12	AAA x 6
LCS145H -M2 -□□	96	35	145	75	124	71.1	27.5	22.5	12	AA x 2
LCS145H -M4 -□□	96	35	145	75	124	71.1	27.5	22.5	12	AA x 4
LCS165 -N -□□	80	27	165	62	147	59.1	19.5	13.5	13	None
LCS165 -M4 -□□	80	27	165	62	147	59.1	19.5	13.5	13	AA x 4
LCS165H -N -□□	80	35	165	62	147	59.1	27.5	21.5	13	None
LCS165H -M4 -□□	80	35	165	62	147	59.1	27.5	21.5	13	AA x 4




Technical Data

Protection class: IP40
Operating temperature: -10°C ~ +60°C

- Designed with beveled edges and rounded corners, and manufactured from flame-retardant ABS UL94V-0 material.
- Available in 9 different compartment types: AAx2, AAx3, AAx4, AAAx2, AAAx3, AAAx4, AAAx6, 9Vx1, and no battery compartment type.
- Positive (+) / negative (-) pole mark are incused within each battery compartment.
- Recommended to be used as measuring instruments, testing devices, wireless communication gadgets, medical equipment, and more.

Battery compartment type

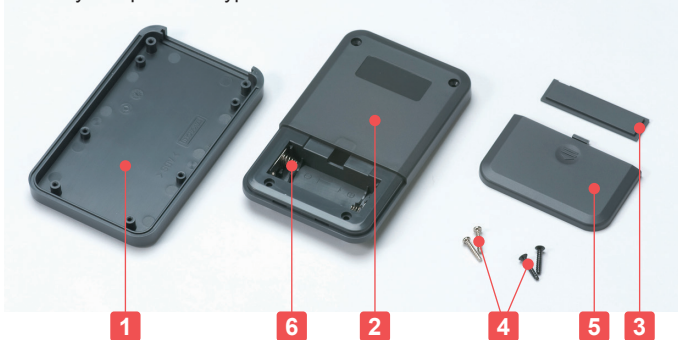

No battery compartment type



Components

No.	Part name	Pcs	Material	Color / Finish
1	Top cover	1	ABS UL94V-0	Off-white • Dark gray
2	Bottom cover	1	ABS UL94V-0	Off-white • Dark gray
3	Panel	1	ABS UL94V-0	Off-white • Dark gray
4	Self-tapping screw	4	Steel M2.6	Nickel plated • Black trivalent chromate
5	Battery cover	1	ABS UL94V-0	Off-white • Dark gray
6	Battery contact	1 set	Brass	Nickel plated
	Battery snap • Cushion sponge (only for 9V models)	1 set	Brass : PVC • Polyurethane foam (UL94HF-1)	Nickel plated • Black

Accessories (Optional parts)



Tapping standoff TPS series
See page 397



PCB mounting screw EM-2.3
See page 398



Belt clip GDH series
See page 390



Key ring • Strap CR-20 • STP series
See page 389




Suspension bracket WM series
See page 391



Neodymium magnet NMG series
See page 392

LC dimensions

■ DXF/DWG/PDF/STP drawings available on our website.

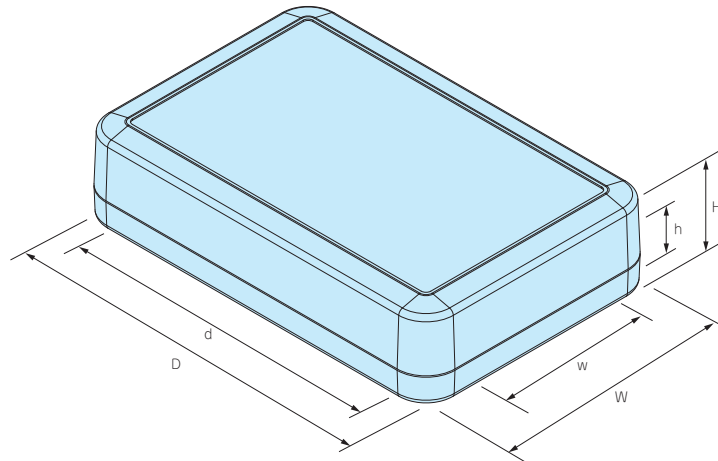

Battery Compartment Type

Type	N None	F2 AAx2	F3 AAx3	F4 AAx4	F6 AAx6	M2 AAx2	M3 AAx3	M4 AAx4	9V 9Vx1
Battery compartment									

Product no. / Details

■ Please suffix color code at the end of the product number.

Product no.		External dimensions			Internal dimensions			Screw	Battery compartment	Weight (g)
● Dark gray	● Off-white	W	H	D	w	h	d			
LC115 -N -D	LC115 -N -W	69	19.5	115	61.5	9.5	86.5	M2.6-14 flat head x 4 pcs	None	70
LC115 -F2 -D	LC115 -F2 -W	69	19.5	115	61.5	9.5	63	M2.6-14 flat head x 2 pcs / M2.6-12 pan head x 2 pcs	AAA x 2	74.5
LC115 -F3 -D	LC115 -F3 -W	69	19.5	115	61.5	9.5	52	M2.6-14 flat head x 2 pcs / M2.6-12 pan head x 2 pcs	AAA x 3	76.5
LC115H -N -D	LC115H -N -W	69	28	115	60.9	18	86.5	M2.6-18 flat head x 4 pcs	None	80
LC115H -F2 -D	LC115H -F2 -W	69	28	115	60.9	18	63	M2.6-18 flat head x 2 pcs / M2.6-14 pan head x 2 pcs	AAA x 2	84.5
LC115H -F3 -D	LC115H -F3 -W	69	28	115	60.9	18	52	M2.6-18 flat head x 2 pcs / M2.6-14 pan head x 2 pcs	AAA x 3	86
LC115H -M2 -D	LC115H -M2 -W	69	28	115	60.9	18	54.8	M2.6-18 flat head x 2 pcs / M2.6-14 pan head x 2 pcs	AA x 2	88.5
LC115H -9V -D	LC115H -9V -W	69	28	115	60.9	18	55.7	M2.6-18 flat head x 2 pcs / M2.6-14 pan head x 2 pcs	9V x 1	88
LC135 -N -D	LC135 -N -W	76	27	135	68.2	16	107	M2.6-18 flat head x 4 pcs	None	95
LC135 -F4 -D	LC135 -F4 -W	76	27	135	68.2	16	59.2	M2.6-18 flat head x 2 pcs / M2.6-14 pan head x 2 pcs	AAA x 4	110
LC135 -M2 -D	LC135 -M2 -W	76	27	135	68.2	16	74.3	M2.6-18 flat head x 2 pcs / M2.6-14 pan head x 2 pcs	AA x 2	108
LC135 -M3 -D	LC135 -M3 -W	76	27	135	68.2	16	59.2	M2.6-18 flat head x 2 pcs / M2.6-14 pan head x 2 pcs	AA x 3	113.5
LC135 -9V -D	LC135 -9V -W	76	27	135	68.2	16	74.3	M2.6-18 flat head x 2 pcs / M2.6-14 pan head x 2 pcs	9V x 1	111.5
LC135H -N -D	LC135H -N -W	76	35	135	67.7	24	107	M2.6-18 flat head x 4 pcs	None	107.5
LC135H -F4 -D	LC135H -F4 -W	76	35	135	67.7	24	59.2	M2.6-18 flat head x 2 pcs / M2.6-14 pan head x 2 pcs	AAA x 4	122
LC135H -M2 -D	LC135H -M2 -W	76	35	135	67.7	24	74.3	M2.6-18 flat head x 2 pcs / M2.6-14 pan head x 2 pcs	AA x 2	121
LC135H -M3 -D	LC135H -M3 -W	76	35	135	67.7	24	59.2	M2.6-18 flat head x 2 pcs / M2.6-14 pan head x 2 pcs	AA x 3	126
LC135H -9V -D	LC135H -9V -W	76	35	135	67.7	24	74.3	M2.6-18 flat head x 2 pcs / M2.6-14 pan head x 2 pcs	9V x 1	123.5
LC145S -N -D	LC145S -N -W	96	20	145	87.9	9.5	112.9	M2.6-14 flat head x 4 pcs	None	110
LC145S -F6 -D	LC145S -F6 -W	96	20	145	88.1	9.2	67.8	M2.6-14 flat head x 2 pcs / M2.6-12 pan head x 2 pcs	AAA x 6	130
LC145 -N -D	LC145 -N -W	96	27	145	87.8	16.5	112.9	M2.6-18 flat head x 4 pcs	None	121
LC145 -F6 -D	LC145 -F6 -W	96	27	145	87.8	16.5	67.8	M2.6-18 flat head x 2 pcs / M2.6-14 pan head x 2 pcs	AAA x 6	141
LC145 -M2 -D	LC145 -M2 -W	96	27	145	87.8	16.5	86.8	M2.6-18 flat head x 2 pcs / M2.6-14 pan head x 2 pcs	AA x 2	135
LC145 -M4 -D	LC145 -M4 -W	96	27	145	87.8	16.5	63.4	M2.6-18 flat head x 2 pcs / M2.6-14 pan head x 2 pcs	AA x 4	142
LC145H -N -D	LC145H -N -W	96	35	145	87.2	24.5	112.9	M2.6-18 flat head x 4 pcs	None	135
LC145H -F6 -D	LC145H -F6 -W	96	35	145	87.2	24.5	67.8	M2.6-18 flat head x 2 pcs / M2.6-14 pan head x 2 pcs	AAA x 6	155.5
LC145H -M2 -D	LC145H -M2 -W	96	35	145	87.2	24.5	86.8	M2.6-18 flat head x 2 pcs / M2.6-14 pan head x 2 pcs	AA x 2	149
LC145H -M4 -D	LC145H -M4 -W	96	35	145	87.2	24.5	63.4	M2.6-18 flat head x 2 pcs / M2.6-14 pan head x 2 pcs	AA x 4	156
LC165 -N -D	LC165 -N -W	80	27	165	72.2	16	137	M2.6-18 flat head x 4 pcs	None	120.5
LC165 -M4 -D	LC165 -M4 -W	80	27	165	72.2	16	79	M2.6-18 flat head x 2 pcs / M2.6-14 pan head x 2 pcs	AA x 4	140
LC165H -N -D	LC165H -N -W	80	35	165	71.7	24	137	M2.6-18 flat head x 4 pcs	None	134.5
LC165H -M4 -D	LC165H -M4 -W	80	35	165	71.7	24	79	M2.6-18 flat head x 2 pcs / M2.6-14 pan head x 2 pcs	AA x 4	153.5



EMC
Shielding



Technical Data

Protection class: IP40
Operating temperature: -10°C ~ +60°C

- LCE series is an EMC shielded version of LC hand-held plastic case coated internally with DOTITE conductive paint (acrylic paint mixed with nickel filler).
- Designed with beveled edges and rounded corners, and manufactured from flame-resistant ABS UL94V-0 material.
- Recommended to be used as measuring instruments, testing devices, wireless communication gadgets, medical equipment, and more.

Components

No.	Part name	Pcs	Material	Color / Finish	Conductive paint
1	Top cover	1	ABS UL94V-0	Dark gray	DOTITE
2	Bottom cover	1	ABS UL94V-0	Dark gray	DOTITE
3	Panel	1	ABS UL94V-0	Dark gray	DOTITE
4	Self-tapping screw	4	Steel M2.6	Black trivalent chromate	—

Accessories (Optional parts)



Silicone cover LCTP • LCSC series
See page 57 ~ 58



Tapping standoff TPS series
See page 397



PCB mounting screw EM-2.3
See page 398




TORX screw MR series
See page 398



Suspension bracket WM series
See page 391

LCE dimensions

■ DXF/DWG/PDF/STP drawings available on our website.

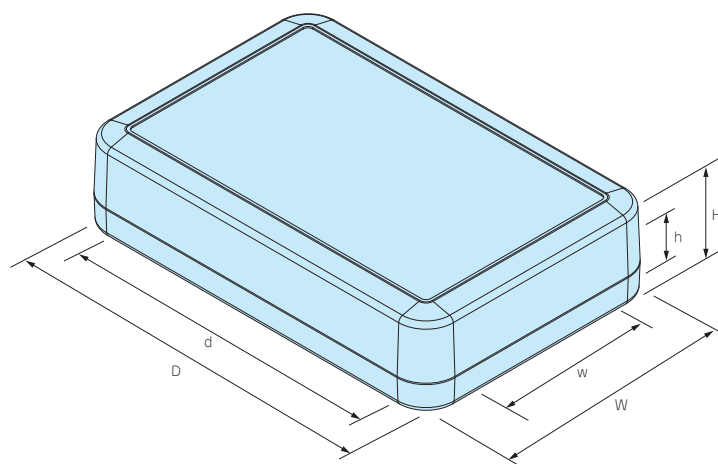

Product no. / Details

Product no.	External dimensions			Internal dimensions			Screw	Weight (g)
	W	H	D	w	h	d		
LCE115 -N -D	69	19.5	115	61.5	9.5	86.5	M2.6-14 flat head x 4 pcs	72.5
LCE115H -N -D	69	28	115	60.9	18	86.5	M2.6-18 flat head x 4 pcs	84
LCE135 -N -D	76	27	135	68.2	16	107	M2.6-18 flat head x 4 pcs	97
LCE145H -N -D	96	35	145	87.2	24.5	112.9	M2.6-18 flat head x 4 pcs	137
LCE165H -N -D	80	35	165	71.7	24	137	M2.6-18 flat head x 4 pcs	139

CONDUCTIVE PAINT CUSTOMIZATION AVAILABLE for LC series

The LCE series are a selected few models of the LC series, customized with conductive paint.

Other LC series enclosures not listed can also be customized with conductive paint.

Contact us for more details.

E-mail : sales@takachi-el.co.jp




LCTP series**SHOCKPROOF SILICONE COVER for LC • LCE****Color Type**

Code	 Orange	 Green	 Navy	 Dark gray
Color				

■ Shock-proof silicone cover for LC and LCE series.

LCTP dimensions

■ DXF/DWG/PDF drawings available on our website.

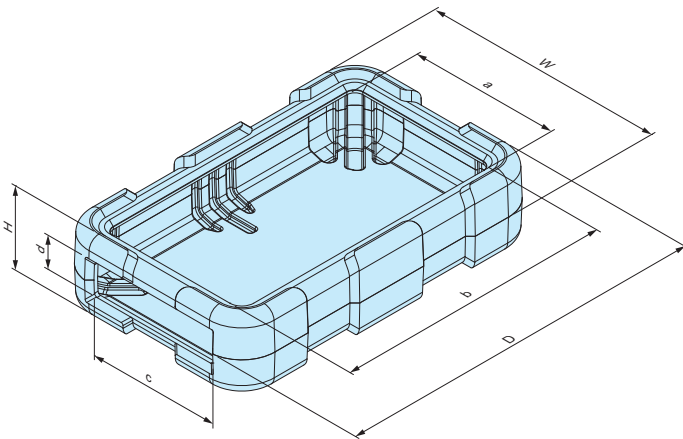**APPLICATION EXAMPLE**

Ultrasonic Hardness Tester

**Components**


Part name	Material	Color
Silicone cover	Silicone	Orange • Green • Navy • Dark gray

Product no. / Details

■ Please suffix color code at the end of the product number.

Product no.	W	H	D	a	b	c	d	Suitable models	Weight (g)
LCTP115 -□	76	28	121.9	55.5	101.5	48.3	12	LC115 • LCE115	53.5
LCTP115H-□	76	36.5	121.9	55.5	101.5	48.3	20.5	LC115H • LCE115H	61
LCTP135 -□	85	40	143.9	59.5	118.5	55	19	LC135 • LCE135	115.5
LCTP135H-□	85	48	143.9	59.5	118.5	55	27	LC135H	124
LCTP145 -□	105	40	153.9	76.5	125.5	71	19	LC145	137.5
LCTP145H-□	105	48	153.9	76.5	125.5	71	27	LC145H • LCE145H	147
LCTP165 -□	89	40	173.9	63.5	148.5	59	19	LC165	143
LCTP165H-□	89	48	173.9	63.5	148.5	59	27	LC165H • LCE165H	151.5


■ Custom color is available from just 1 pc. For 500 pcs or more, manufacturing costs will be similar to a standard color. Please inquire for more details.
For custom color order, please specify **PANTONE®** color code.

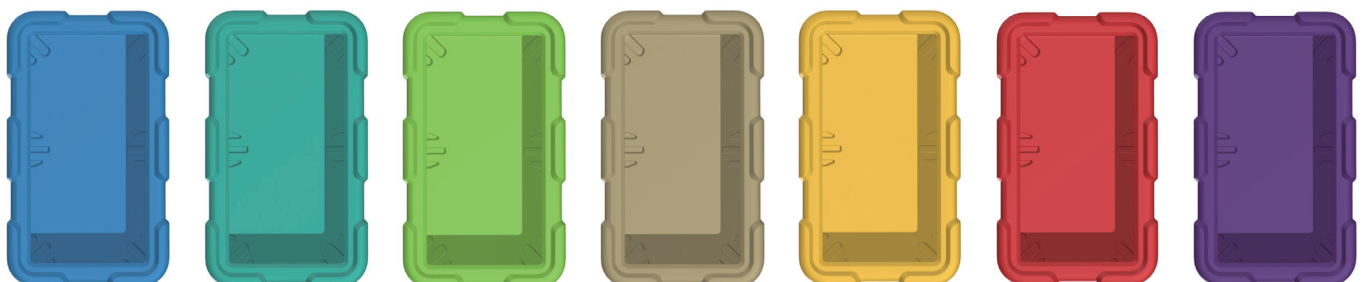

LCSC series**SILICONE COVER for LC • LCE****Color Type**

Code	[R] Red	[G] Green	[B] Blue	[D] Dark gray	[L] Light gray
Color					

■ Silicone cover for LC and LCE series.

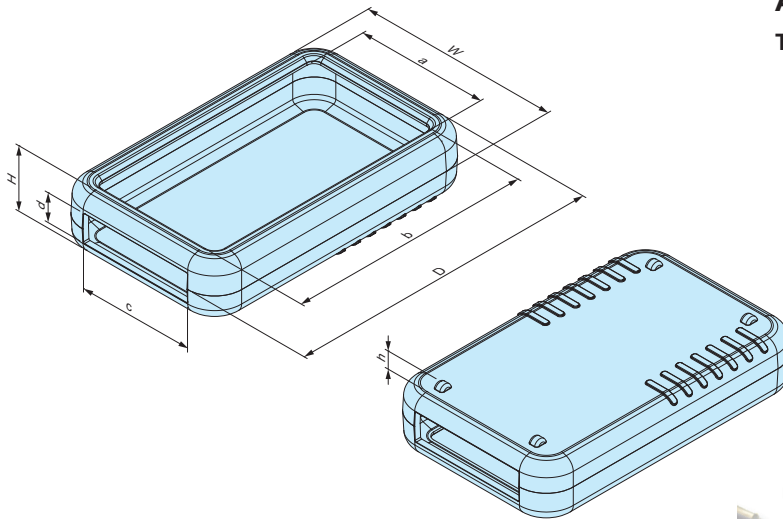LCSC dimensions

■ DXF/DWG/PDF drawings available on our website.

APPLICATION EXAMPLE**Temperature Surveillance Sensor****Components**


Part name	Material	Color
Silicone cover	Silicone	Red • Green • Blue • Dark gray • Light gray

Product no. / Details

■ Please suffix color code at the end of the product number.

Product no.	W	H	D	a	b	c	d	h	Suitable models	Weight (g)
LCSC115 -□	74	24	120	55.5	101.5	48.3	12	2	LC115 • LCE115	43
LCSC115H-□	74	32.5	120	55.5	101.5	48.3	20.5	2	LC115H • LCE115H	50
LCSC135 -□	81	32	141	59.5	118.5	55	19	2.5	LC135 • LCE135	70
LCSC135H-□	81	40	141	59.5	118.5	55	27	2.5	LC135H	75.5
LCSC145 -□	101	32	151	76.5	125.5	71	19	2.5	LC145	81
LCSC145H-□	101	40	151	76.5	125.5	71	27	2.5	LC145H • LCE145H	89
LCSC165 -□	85	32	171	63.5	148.5	59	19	2.5	LC165	82.5
LCSC165H-□	85	40	171	63.5	148.5	59	27	2.5	LC165H • LCE165H	86

■ Custom color is available from just 1 pc. For 500pcs or more, manufacturing costs will be similar to a standard color. Please inquire for more details.
For custom color order, please specify **PANTONE®** color code.

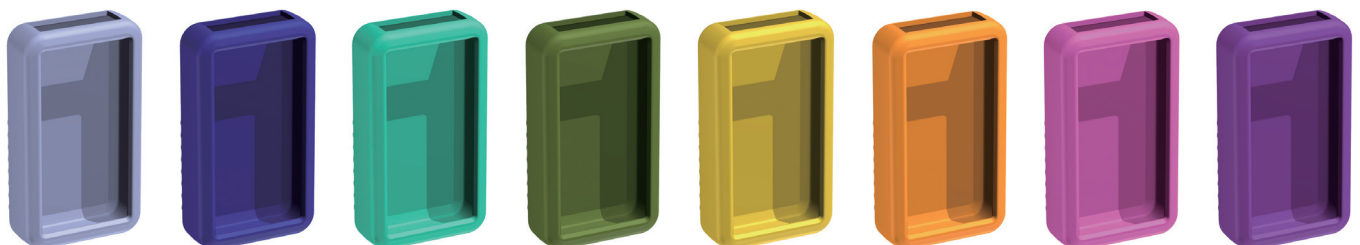

WSC series

IP67 SLOPED PLASTIC CASE




Ergonomic design and streamlined shape

Best suited for desktop operation with its sloped surface.

2 different inclined angles, 13° and 18° are available to select for various operating environments.

Streamlined shape enables the unit to be gripped better when used as a handheld instrument.

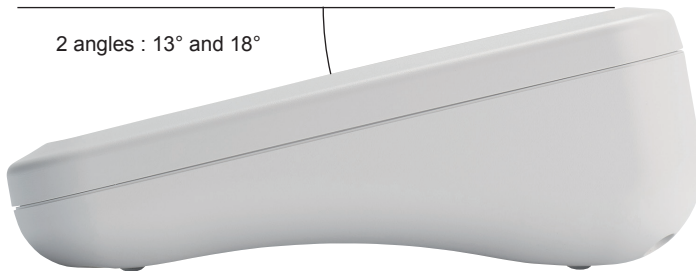

2 angles : 13° and 18°

Photo : 13° type



IP67 water- and dust-proof structure that can withstand various environments

High elasticity and good durability for maintaining waterproofing capability.

Built-in insert nut use for long-lasting protection even after frequent opening and closing.



APPLICATION EXAMPLE

Medical Measurement Device • Medical Controller



Transmitter • Network Equipment



RFID Card Reader



RFID Reader for ICT Entry/Exit System "KIDSNA connect" for Daycare/Preschool



Information on waterproofing after hole milling for switches


The waterproof performance will be lost once hole or cutout is machined on an IP rated enclosure. To ensure it remains waterproof after hole/cutout machining, IP rated membrane pad or overlay is required.



Information on affixing of cables into waterproof enclosures

Please utilize a cable gland from our available range of cable gland accessories.



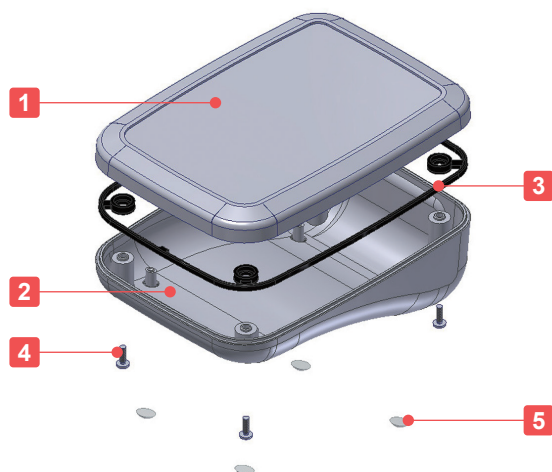

Technical Data

Protection class : IP67
 Operating temperature : -10°C ~ +60°C
 Recommended torque : 0.2 ~ 0.3N · m

- Suitable as a desktop controller or measurement instrument with its ergonomic design.
- Streamlined shape enables the unit to be gripped better when used as a handheld instrument.
- IP67 protection class allows the unit to be used outdoors or under environments with water splashes, such as for medical research or measuring equipment.

Components

No.	Part name	Pcs	Material	Color / Finish
1	Top Cover	1	Flame-resistant ABS UL94V-0	Off-white • Black
2	Bottom base	1	Flame-resistant ABS UL94V-0	Off-white • Black
3	Gasket	1	Silicone	Black
4	Screw	4	Stainless steel binding head M2.5-8	Unfinished
5	Rubber feet	4	Polyurethane	Transparent

Accessories (Optional parts)



PCB mounting screw EM series
See page 398



Adhesive standoff AST series
See page 394




TORX screw MR series
See page 398



Cable gland
See page 181 ~ 193

WSC dimensions

■ DXF/DWG/PDF/STP drawings available on our website.

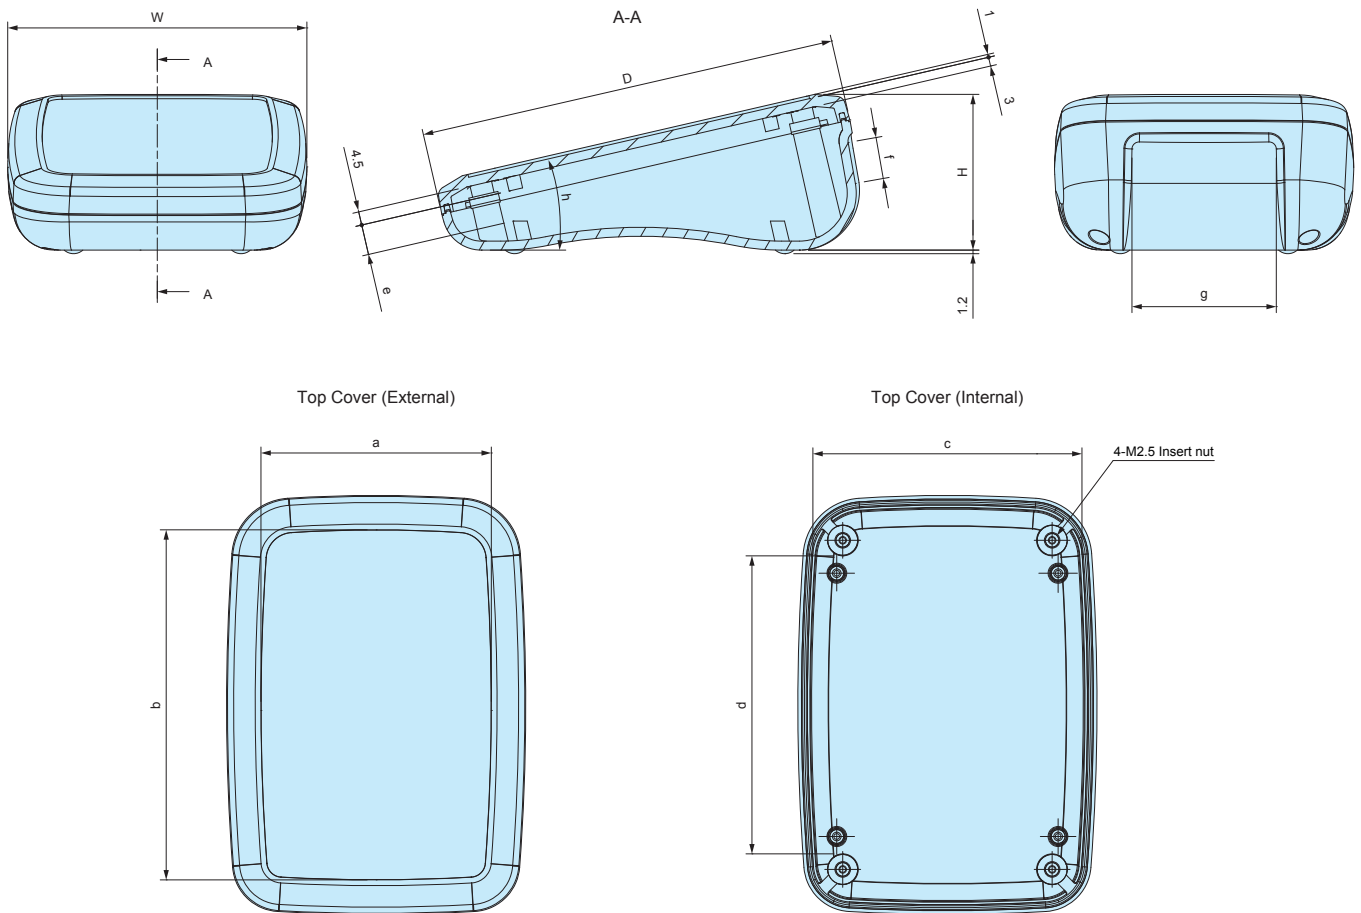


Product no. / Details

Product no.		Dimensions										Face angle	Weight (g)
● Off-white	● Black	W	D	H	a	b	c	d	e	f	g	h	
WSC10-14-5W	WSC10-14-5B	100	140	52	77	117	87	100	10	13.9	48.2	13°	145
WSC10-14-7W	WSC10-14-7B	100	140	72	77	117	87	100	22	27.4	48.2	18°	168
WSC14-14-5W	WSC14-14-5B	140	140	52	117	117	128	100	10	13.8	80.5	13°	190
WSC14-14-7W	WSC14-14-7B	140	140	72	117	117	128	100	22	27.4	80.5	18°	218
WSC18-14-5W	WSC18-14-5B	175	140	52	152	117	163	95	11.3	13.8	103.5	13°	234
WSC18-14-7W	WSC18-14-7B	175	140	72	152	117	163	95	23.7	27.4	103.5	18°	262


Accessories (Optional parts)

WSP-M2.3

INCLINED SPACER for WSC

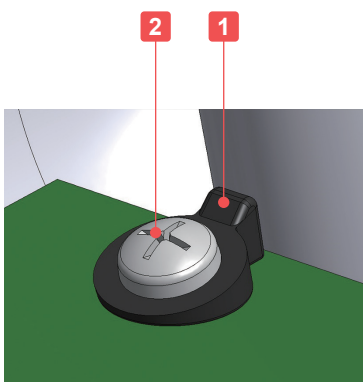

- Due to the sloped shape of the WSC series, boss-tops are also angled. Therefore when mounting PCB on, some gap between the screw head and PCB surface will occur as shown in the diagram. WSP-M2.3 helps to fill the gap.
- EM-2.3-8 as PCB mounting screws are available for bosses in bottom base. (See page 398)



Components

No.	Part name	Pcs	Material	Color / Finish
1	Inclined spacer	4	POM	Black
2	Screw (Tapping M2.3-8)	4	Steel	Trivalent chromate

■ Recommended torque : 0.1N • m

Product no. / Details

Product no.	Suitable models	Pack of
WSP-M2.3	WSC (for bottom base PCB boss)	4

SHOCKPROOF PLASTIC ENCLOSURE

Ensure your industrial tablet, measuring equipment and controllers are protected with the silicone corner guards

PFG series



6 DIFFERENT COLOR COMBINATIONS AVAILABLE

3 corner guard colors and 2 plastic box colors available for a total of 6 color combinations to choose from. Different color combinations can be freely chosen depending on your purpose of use.




HOW TO ASSEMBLE CORNER GUARDS

1. Insert corner guards into designated holes on the top corners.



2. Insert spacers into the holes on the bottom of corner guards. Fasten bottom base and corner guards together with screws.

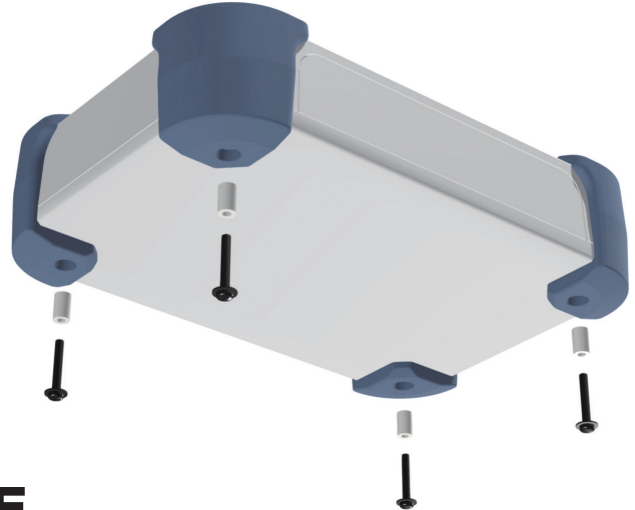

APPLICATION EXAMPLE

Industrial Tablet



Medical Equipment




Network Device





Technical Data

Protection class: IP40
Operating temperature: -10°C ~ +60°C

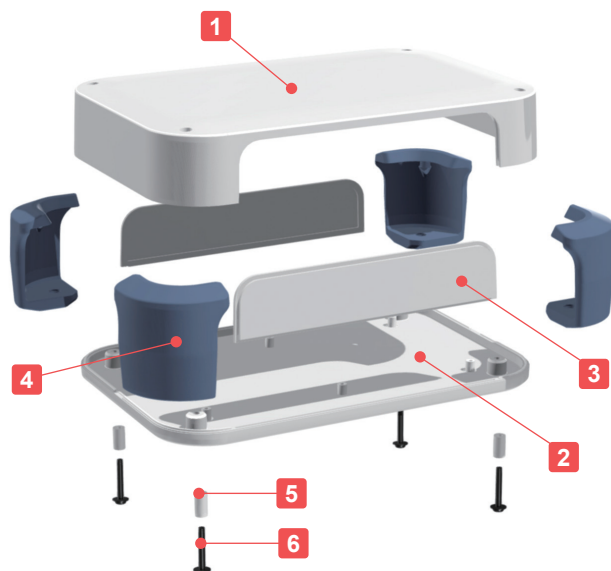

- Network plastic box attached with shockproof silicone corner guards.
- Suitable for industrial tablet, measuring equipment, controller and various other applications.
- A total of 6 color combinations available with 3 corner guard colors - Dark gray, Emerald, Indigo - and 2 plastic box colors - Dark gray and Off-white.

Components


No.	Part name	Pcs	Material	Color / Finish
1	Top cover	1	ABS UL94V-0	Off-white • Dark gray
2	Bottom base	1	ABS UL94V-0	Off-white • Dark gray
3	Panel	2	ABS UL94V-0	Off-white • Dark gray
4	Corner guard	4	Silicone	Dark gray • Emerald • Indigo
5	Spacer	4	PA	White
6	Self-tapping screw	4	Steel	Nickel plated

Color Type

Code	D D Dark gray / Dark gray	D E Dark gray / Emerald	D I Dark gray / Indigo
Color			
Code	W D Off-white / Dark gray	W E Off-white / Emerald	W I Off-white / Indigo
Color			

PFG dimensions

■ DXF/DWG/PDF/STP drawings available on our website.

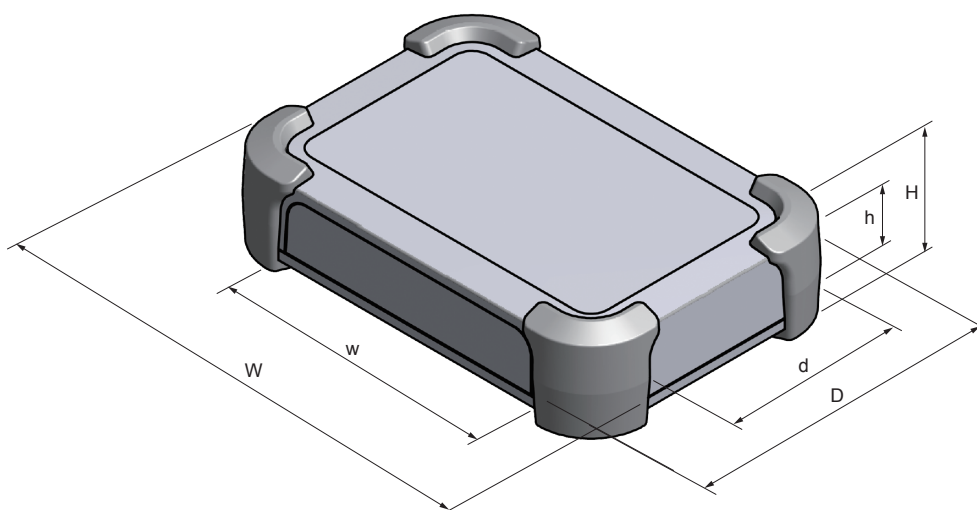

Product no. / Details

■ Please suffix color code at the end of the product number.

Product no.	External dimensions			Internal dimensions			Weight (g)
	W	H	D	w	h	d	
PFG20-4-13 □□	208 (200)	51 (40)	143 (135)	151.6	27.3	124.4	346
PFG20-4-20 □□	208 (200)	51 (40)	208 (200)	151.6	27.3	189.4	450
PFG24-6-17 □□	248 (240)	71.5 (60)	173 (165)	187.6	47	153.2	520
PFG24-6-24 □□	248 (240)	71.5 (60)	248 (240)	187.6	47	228.2	696.5

■ () value = enclosure dimension.

Accessories (Optional parts)



Embedded battery box BC series
See page 381 ~ 383



Tapping standoff TPS series
See page 397



PCB mounting screw EM series
See page 398




Tilt leg TLW series
See page 239

PF series **FLAT NETWORK CASE**

Huge selection, 41 different sizes are now available.

Suitable for IoT device, data transmitter/receiver, and access point.

From 80 x 50 x 22.5 to 320 x 225 x 100 mm.

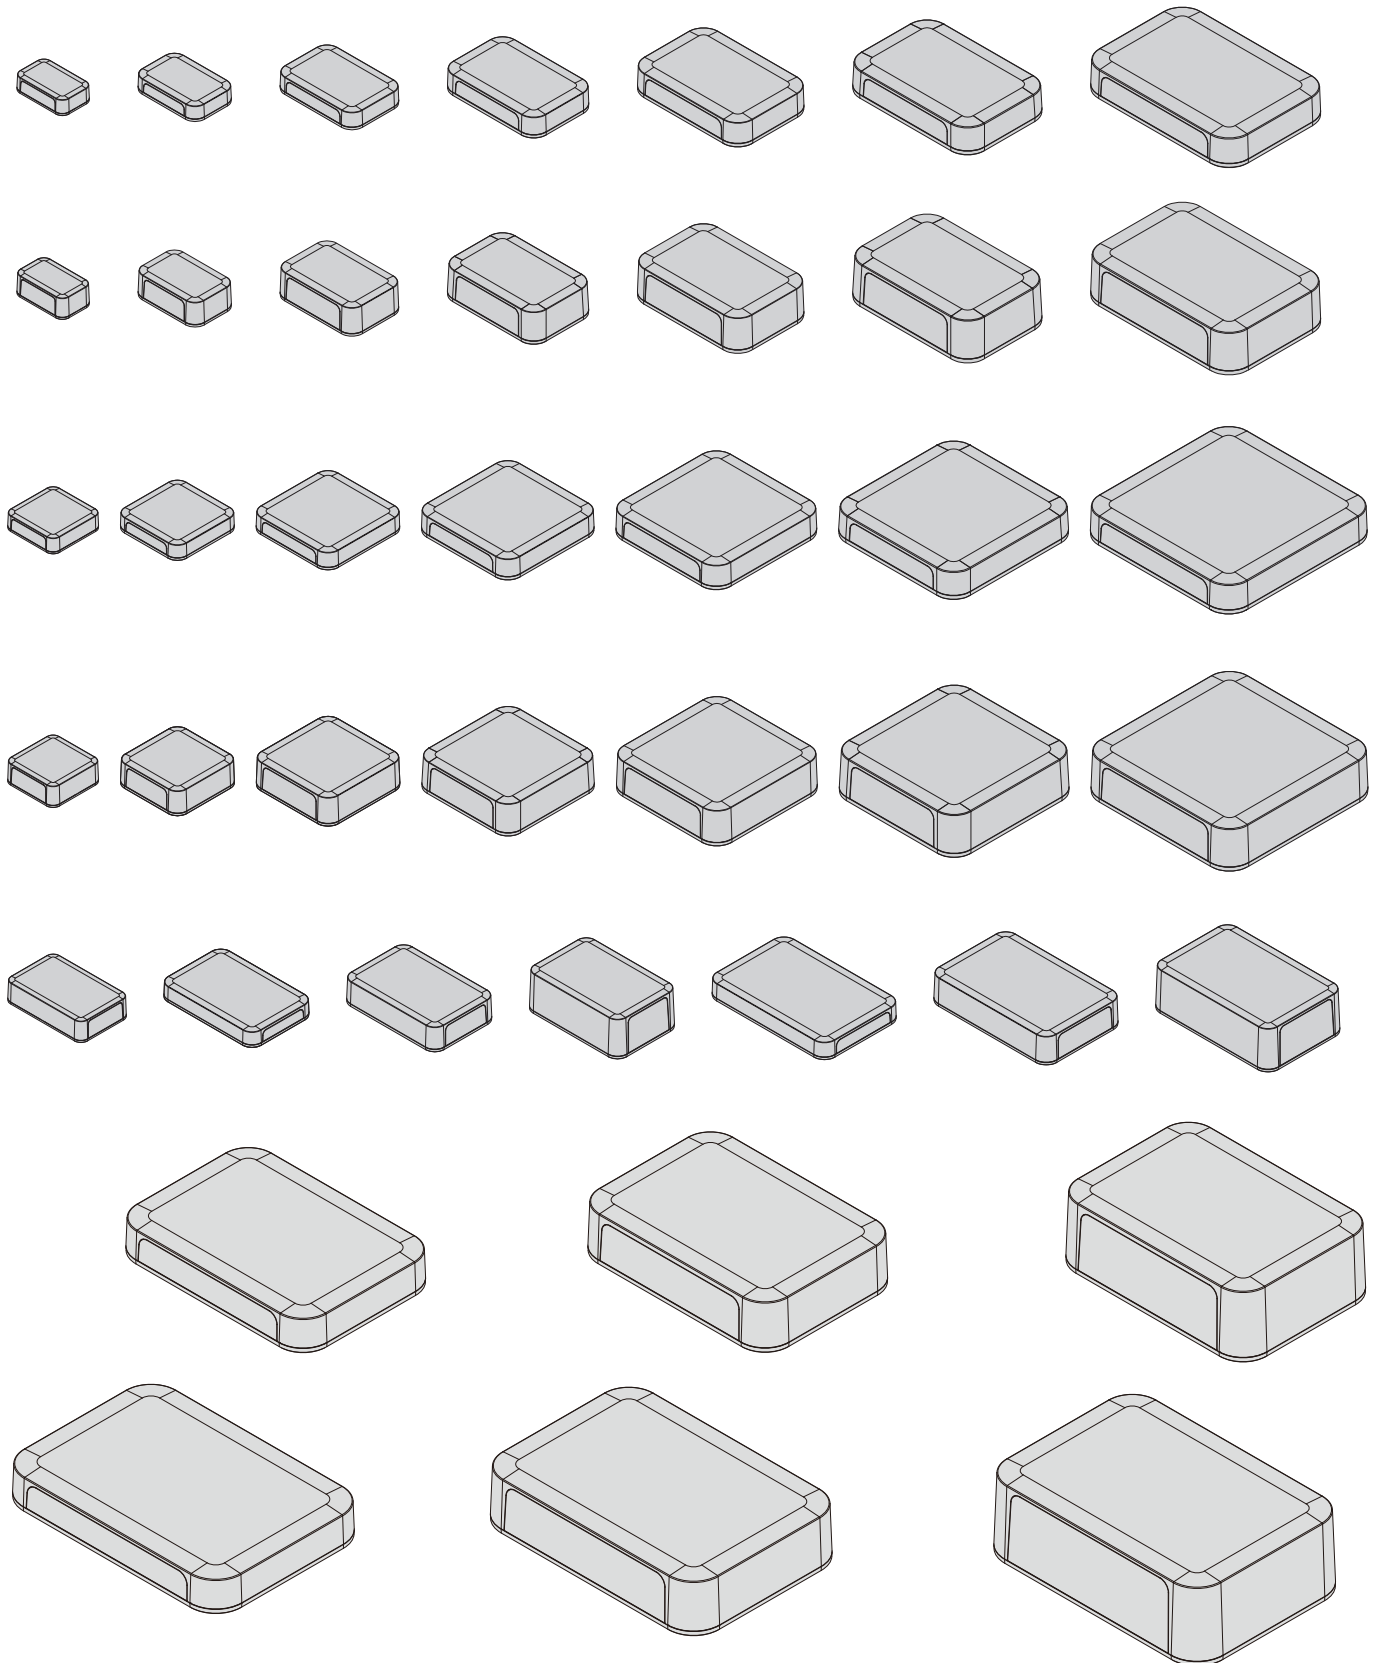


APPLICATION EXAMPLE

WiFi Access Point



USB Power Charging Hub + Data Hub

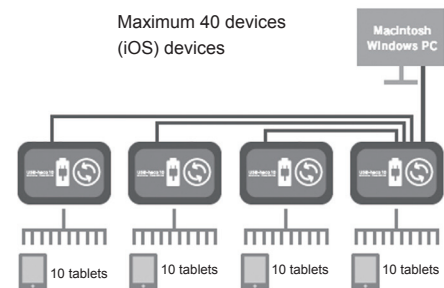

Simultaneous power charging and data transfer is possible.

Front Door Electric Opener System Controller



USB Hemodynamic Research Device



Multi Channel Data Logger



Storage Battery Monitoring System

Wireless CO₂ Monitoring System



Wireless Home Electronics Controller



Wireless Safety Confirmation System



G4 Flight Tracker



Advanced Trigger Station



iCONSE-T IoT and Sensor Network Training System




Wireless Network Data Logger



Analog Serial Converter



"SenSu" Communication Unit with Sensor

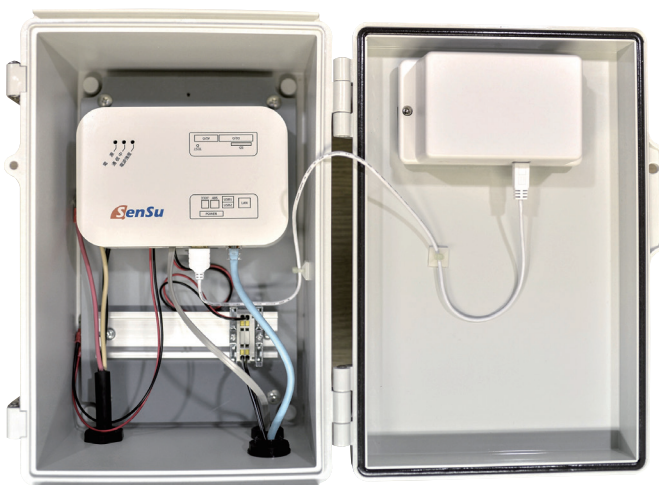

Modbus Converter






Technical Data

Protection class: IP40
Operating temperature: -10°C ~ +60°C

- A total of 41 different sizes available for selection.
- Flat designed plastic case with detachable panels.
- Made of flame-resistant ABS UL94V-0 and available in Off-white and Dark gray colors.
- Equipped with built-in bosses for PCB mounting.
- Suitable for Wi-Fi access point, measuring equipment, controller and various other applications.

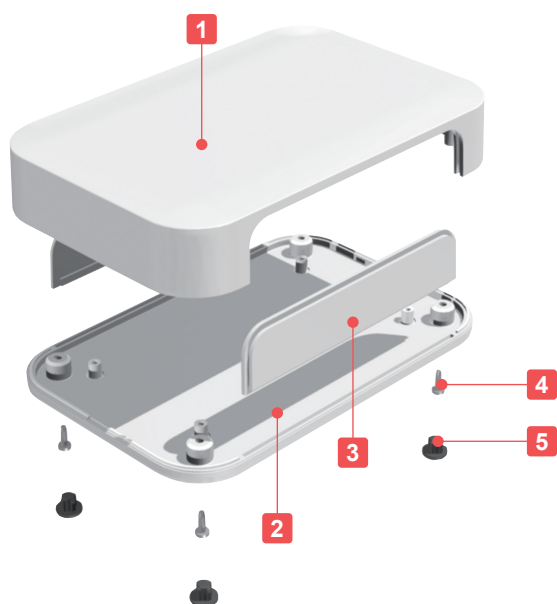

Components

No.	Part name	Pcs	Material	Color / Finish
1	Top cover	1	ABS UL94V-0	Off-white • Dark gray
2	Bottom base	1	ABS UL94V-0	Off-white • Dark gray
3	Panel	2	ABS UL94V-0	Off-white • Dark gray
4	Self-tapping screw	4	Steel	Nickel plated
5	Rubber feet*	4	Elastomer UL94HB	Dark gray

*Rubber feet are not included in PF8-□-5, PF8-□-8, PF8-3-13 models.

Accessories (Optional parts)



Embedded battery box BC series
See page 381 ~ 383



Tapping standoff TPS series
See page 397




PCB mounting screw EM series
See page 398



Suspension bracket WM series
See page 391

PF dimensions

■ DXF/DWG/PDF/STP drawings available on our website.

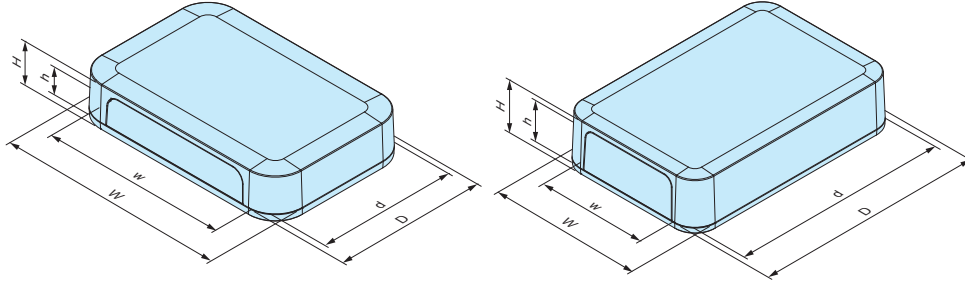

Product no. / Details

Product no.		External dimensions			Internal dimensions			Weight (g)
● Off-white	● Dark gray	W	H	D	w	h	d	
PF 8- 2- 5W	PF 8- 2- 5D	80	22.5	50	55.5	13.5	42.8	36.2
PF 8- 2- 8W	PF 8- 2- 8D	80	22.5	80	55.5	13.5	72.8	53.3
PF 8- 3- 5W	PF 8- 3- 5D	80	30	50	55.5	21	42.3	41.6
PF 8- 3- 8W	PF 8- 3- 8D	80	30	80	55.5	21	72.3	60.1
PF 8- 3-13W	PF 8- 3-13D	80	30	125	55.5	21	117.3	87.3
PF10- 2- 7W	PF10- 2- 7D	100	22.5	67	67.4	11.1	58.4	60
PF10- 2-10W	PF10- 2-10D	100	22.5	100	67.4	11.1	91.4	82.9
PF10- 2-15W	PF10- 2-15D	100	22.5	150	67.4	11.1	141.4	120.2
PF10- 4- 7W	PF10- 4- 7D	100	35	67	67.4	23.6	57.5	65
PF10- 4-10W	PF10- 4-10D	100	35	100	67.4	23.6	90.5	97.1
PF10- 4-15W	PF10- 4-15D	100	35	150	67.4	23.6	140.5	132.6
PF10- 6-15W	PF10- 6-15D	100	55	150	67.4	43.6	139.1	169.1
PF13- 3- 9W	PF13- 3- 9D	125	25	85	92.4	13.5	76.2	90.8
PF13- 3-13W	PF13- 3-13D	125	25	125	92.4	13.5	116.2	127.5
PF13- 3-19W	PF13- 3-19D	125	25	190	92.4	13.5	181.2	186.8
PF13- 4- 9W	PF13- 4- 9D	125	40	85	92.4	28.5	75.2	108.4
PF13- 4-13W	PF13- 4-13D	125	40	125	92.4	28.5	115.2	151.4
PF13- 4-19W	PF13- 4-19D	125	40	190	92.4	28.5	180.2	214.9
PF13- 6-19W	PF13- 6-19D	125	60	190	92.4	48.5	178.8	250.4
PF15- 3-10W	PF15- 3-10D	150	30	100	112.4	17.8	90	145.5
PF15- 3-15W	PF15- 3-15D	150	30	150	112.4	17.8	140	207.5
PF15- 5-10W	PF15- 5-10D	150	45	100	112.4	32.8	88.9	166
PF15- 5-15W	PF15- 5-15D	150	45	150	112.4	32.8	138.9	233.5
PF18- 4-12W	PF18- 4-12D	175	35	120	132.4	22.4	110.3	188.7
PF18- 4-18W	PF18- 4-18D	175	35	175	132.4	22.4	165.3	266.8
PF18- 5-12W	PF18- 5-12D	175	50	120	132.4	37.4	109.3	213.6
PF18- 5-18W	PF18- 5-18D	175	50	175	132.4	37.4	164.3	302.1
PF20- 4-13W	PF20- 4-13D	200	40	135	151.6	27.3	124.4	264
PF20- 4-20W	PF20- 4-20D	200	40	200	151.6	27.3	189.4	368.5
PF20- 6-13W	PF20- 6-13D	200	60	135	151.6	47.3	123	302.5
PF20- 6-20W	PF20- 6-20D	200	60	200	151.6	47.3	188	417
PF24- 4-17W	PF24- 4-17D	240	42.5	165	187.6	29.5	154.5	370.4
PF24- 4-24W	PF24- 4-24D	240	42.5	240	187.6	29.5	229.5	521.4
PF24- 6-17W	PF24- 6-17D	240	60	165	187.6	47	153.2	408.8
PF24- 6-24W	PF24- 6-24D	240	60	240	187.6	47	228.2	568.7
PF28- 5-20W	PF28- 5-20D	280	45	200	223.6	31.4	189.3	564.1
PF28- 7-20W	PF28- 7-20D	280	65	200	223.6	51.4	187.9	618.4
PF28- 9-20W	PF28- 9-20D	280	90	200	223.6	76.4	186.2	709.2
PF32- 5-23W	PF32- 5-23D	320	45	225	259.6	31.3	214.3	697.1
PF32- 7-23W	PF32- 7-23D	320	70	225	259.6	56.3	212.6	782.1
PF32-10-23W	PF32-10-23D	320	100	225	259.6	86.3	210.5	899.8

* H dimension does not include the height of rubber feet. (Rubber feet height = +2mm)

EMC
Shielding

- PFE series is an EMC shielded version of the PF series network plastic box coated internally with DOTITE conductive paint (acrylic paint mixed with nickel filler).
- Flat designed plastic case with detachable panels.
- Made of flame-resistant ABS UL94V-0.
- Equipped with built-in bosses for PCB mounting.
- Suitable for Wi-Fi access point, measuring equipment, controller or various other applications for desktop, wall mounting use and more.

Technical Data

Protection class: IP40
Operating temperature: -10°C ~ +60°C

Components

No.	Part name	Pcs	Material	Color / Finish	Conductive paint
1	Top cover	1	ABS UL94V-0	Off-white	DOTITE
2	Bottom base	1	ABS UL94V-0	Off-white	DOTITE
3	Panel	2	ABS UL94V-0	Off-white	DOTITE
4	Self-tapping screw	4	Steel	Nickel plated	—
5	Rubber feet	4	Elastomer	Dark gray	—

Accessories (Optional parts)



Tapping standoff TPS series
See page 397



PCB mounting screw EM series
See page 398



TORX screw MR series
See page 398




Suspension bracket WM series
See page 391



Embedded battery box BC series
See page 381 ~ 383

PFE dimensions

■ DXF/DWG/PDF/STP drawings available on our website.

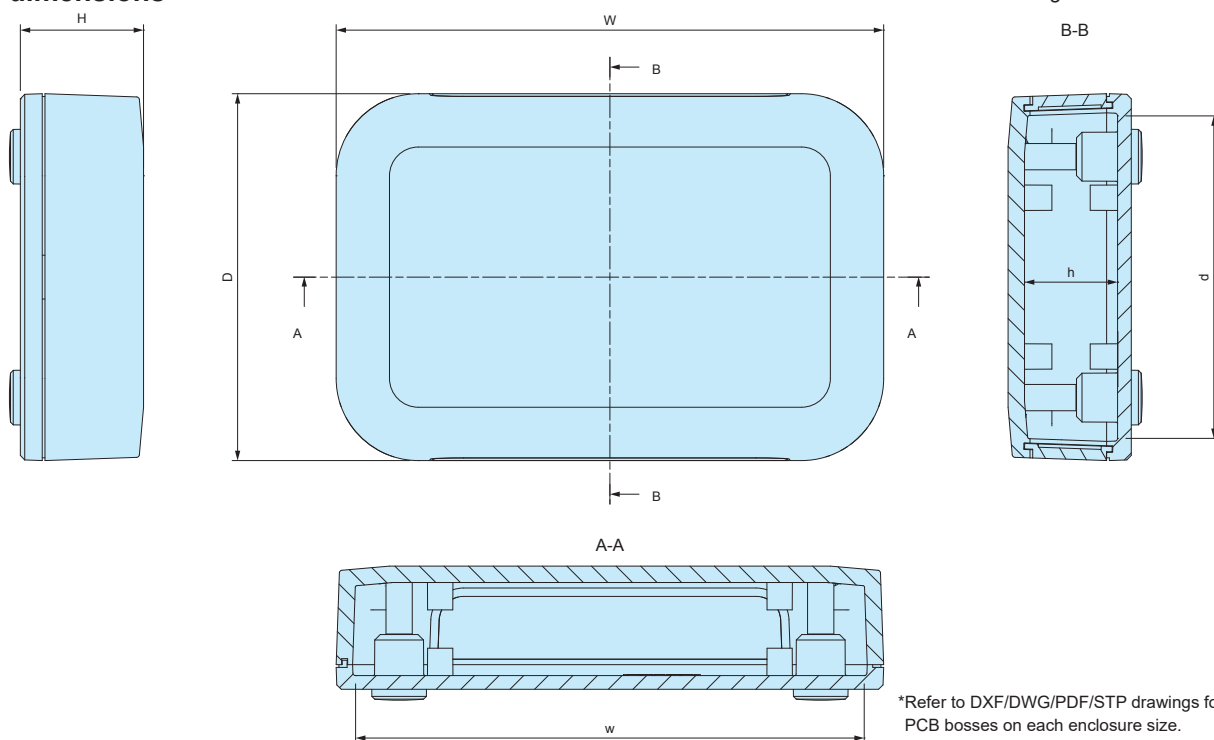

*Refer to DXF/DWG/PDF/STP drawings for number of PCB bosses on each enclosure size.

Product no. / Details

*H dimension does not include the height of rubber feet. (Rubber feet height = +2mm)

Product no.	External dimensions			Internal dimensions			Screw	Weight (g)
	W	H	D	w	h	d		
PFE13-4- 9W	125	40	85	116	75	34.5	M2.5-8 x 4 pcs	114
PFE15-3-10W	150	30	100	142	90	24	M2.5-8 x 4 pcs	152
PFE15-5-15W	150	45	150	141	139	39	M2.5-8 x 4 pcs	244.5
PFE20-4-13W	200	40	135	191.5	124.5	34	M3-8 x 4 pcs	274.5

Accessories (Optional parts)

PFRF series


RUBBER FEET for PF • PFE



- Rubber feet for PF • PFE series.
- Inserted into the screw holes on the underside of box.
- Elastomer material is resistant against color migration.
- PF • PFE boxes comes with PFRF rubber feet. Utilize PFRF as spare or replacement.

PFRF dimensions

■ STP drawings available on our website.

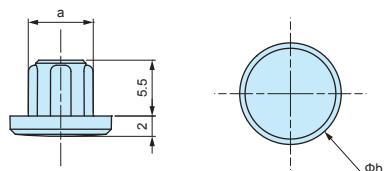

Product no. / Details

Product no.	Dimensions		Suitable models	Material	Color	Pack of
	a	b				
PFRF-M2.5D	6.4	10	PF10-2-7,10-2-10,10-2-15,10-4-7,10-4-10,10-4-15 PF10-6-15,13-3-9,13-3-13,13-3-19,13-4-9,13-4-13 PF13-4-19,13-6-19,15-3-10,15-3-15,15-5-10,15-5-15 PF18-4-12,18-4-18,18-5-12,18-5-18 PFE13-4-9,15-3-10,15-5-15	Elastomer	Dark gray	4
PFRF-M3D	7.2	11	PF20-4-13,20-4-20,20-6-13,20-6-20,24-4-17 PF24-4-24,24-6-17,24-6-24,28-5-20,28-7-20 PF28-9-20,32-5-23,32-7-23,32-10-23 PFE20-4-13	Elastomer	Dark gray	4

TWS series

PLASTIC ENCLOSURE with SILICONE PROTECTOR

Universal plastic enclosure with protective silicone protectors which functions both as an anti-slip grip and impact protection. Available in 9 sizes and selectable in 8 different color combinations. Suitable for measuring instruments, wireless communication devices, portable controller, data logger, and more.

APPLICATION EXAMPLE

Digital Power Amplifier



GPS Data Logger



6 Channel Data Logger



Battery Voltage Recorder



Tester for Photovoltaic System



Solar Cell Bypass Diode Checker



PV Insulation Resistance Checker for Solar Cell




Vibration Monitor





Technical Data

Protection class : IP40
Operating temperature : -10°C ~ +60°C

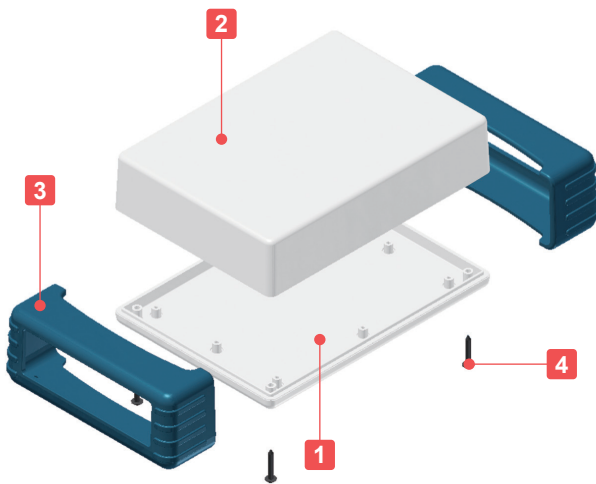

- Universal plastic enclosure with protective silicone protectors which functions both as an anti-slip grip and impact protection.
- Available in 9 sizes and selectable in 8 different color combinations.
- Enclosure is in B (Black - ABS UL94HB) and W (Off-white - ABS UL94V-0) model.
- Plastic case and protective silicone with screw fastening.
*Note: utilize screws packaged with the silicone protectors for assembly.
- Use caution when assembling. Overtightening may damage the enclosure and silicone protectors.
- Custom color silicone protector is available from just 1 set. For 500 sets or more, manufacturing costs will be similar to a standard color. Please inquire for more details.

Components

No.	Part name	Pcs	Material : Color / Finish
1	Cover	1	ABS UL94HB : Black • ABS UL94V-0 : Off-white
2	Bottom base	1	ABS UL94HB : Black • ABS UL94V-0 : Off-white
3	Silicone protector	2	Silicone : Yellow • Navy • Light gray • Black
4	Self-tapping screw	4	Steel M3-20 / Black trivalent chromate

Accessories (Optional parts)



Embedded battery box BC series
See page 381 ~ 383



Adhesive standoff AST series
See page 394



Tapping standoff TPS series
See page 397



PCB mounting screw EM series
See page 398

Color Type

Code	B Y Black / Yellow	B N Black / Navy	B L Black / Light gray	B B Black / Black
Color				
Code	W Y Off-white / Yellow	W N Off-white / Navy	W L Off-white / Light gray	W B Off-white / Black
Color				

ABS UL94HB (Black enclosure)

Product no. / Details

■ Please suffix color code at the end of the product number.

Product no.	W	H	D	Weight (g)
TWS 7-3-13B□	71 (65)	32 (25.6)	136 (130)	117
TWS 7-5-13B□	71 (65)	56 (50.1)	136 (130)	147.5
TWS 9-4-17B□	91.5 (85.5)	41.5 (35.5)	176 (170)	193
TWS 9-6-17B□	91.5 (85.5)	66.5 (60.5)	176 (170)	243
TWS11-5-22B□	116 (110)	51.5 (45.3)	226 (220)	325.5
TWS11-8-22B□	116 (110)	81.5 (75.3)	226 (220)	399
TWS13-5-13B□	131 (125)	51 (45)	131 (125)	269.5
TWS13-5-18B□	131 (125)	51 (45)	181 (175)	322
TWS13-7-18B□	131 (125)	71 (65)	181 (175)	371

■ () value = enclosure dimension.

ABS UL94V-0 (Off-white enclosure)

Product no. / Details


■ Please suffix color code at the end of the product number.

Product no.	W	H	D	Weight (g)
TWS 7-3-13W□	71 (65)	32 (25.6)	136 (130)	126
TWS 7-5-13W□	71 (65)	56 (50.1)	136 (130)	163
TWS 9-4-17W□	91.5 (85.5)	41.5 (35.5)	176 (170)	211
TWS 9-6-17W□	91.5 (85.5)	66.5 (60.5)	176 (170)	266
TWS11-5-22W□	116 (110)	51.5 (45.3)	226 (220)	356.5
TWS11-8-22W□	116 (110)	81.5 (75.3)	226 (220)	438
TWS13-5-13W□	131 (125)	51 (45)	131 (125)	294
TWS13-5-18W□	131 (125)	51 (45)	181 (175)	353
TWS13-7-18W□	131 (125)	71 (65)	181 (175)	407.5

■ () value = enclosure dimension.

TWS dimensions

■ DXF/DWG/PDF/STP drawings available on our website.

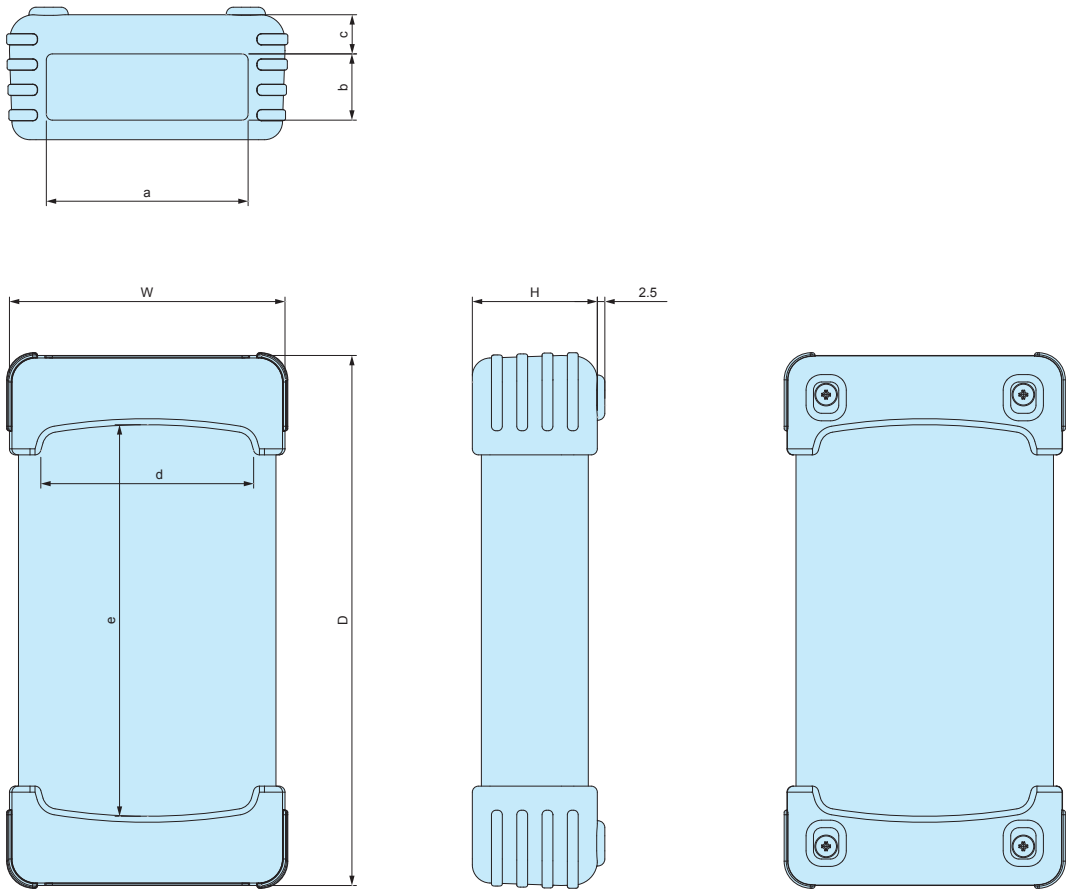


■ Please suffix color code at the end of the product number.

Product no.	W	H	D	a	b	c	d	e
TWS 7-3-13□□	71	32	136	52	13.5	11.8	54	98
TWS 7-5-13□□	71	56	136	52	37.5	11.9	54	98
TWS 9-4-17□□	91.5	41.5	176	67	22	13	71	130
TWS 9-6-17□□	91.5	66.5	176	67	46.5	13.3	71	130
TWS11-5-22□□	116	51.5	226	80	29	14.3	89	166
TWS11-8-22□□	116	81.5	226	80	58	14.5	89	166
TWS13-5-13□□	131	51	131	101	29.5	13.5	104	76
TWS13-5-18□□	131	51	181	101	29.5	13.5	104	126
TWS13-7-18□□	131	71	181	101	48.5	14	104	126

Enclosure dimensions

■ DXF/DWG/PDF/STP drawings available on our website.

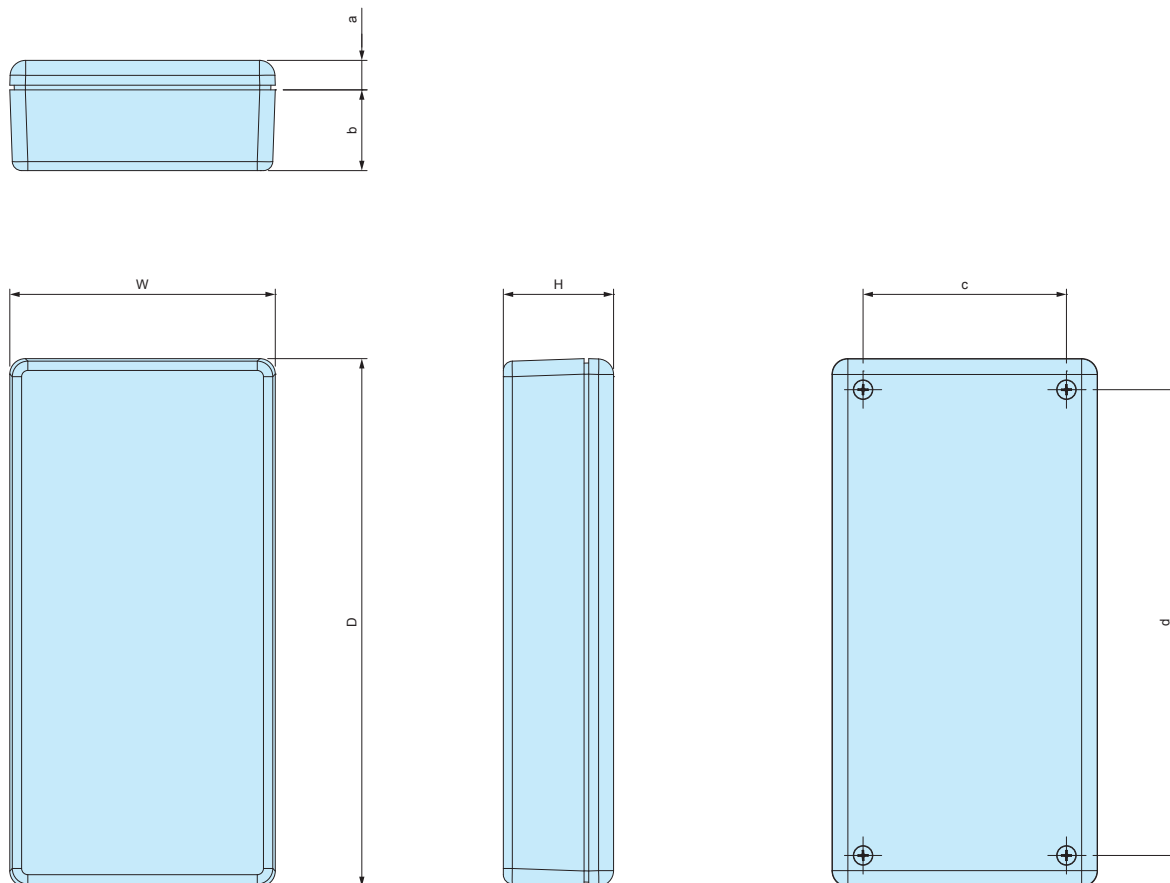


■ Please suffix color code at the end of the product number.

Product no.	W	H	D	a	b	c	d
TWS 7-3-13□□	65	25.6	130	8.1	17.5	47	112
TWS 7-5-13□□	65	50.1	130	8.1	42	47	112
TWS 9-4-17□□	85.5	35.5	170	9.5	26	65.5	150
TWS 9-6-17□□	85.5	60.5	170	9.5	51	65.5	150
TWS11-5-22□□	110	45.3	220	10.3	35	88	198
TWS11-8-22□□	110	75.3	220	10.3	65	88	198
TWS13-5-13□□	125	45	125	8.5	36.5	107	107
TWS13-5-18□□	125	45	175	8.5	36.5	105	155
TWS13-7-18□□	125	65	175	8.5	56.5	105	155



Technical Data

Protection class : IP40
Operating temperature : -10°C ~ +60°C

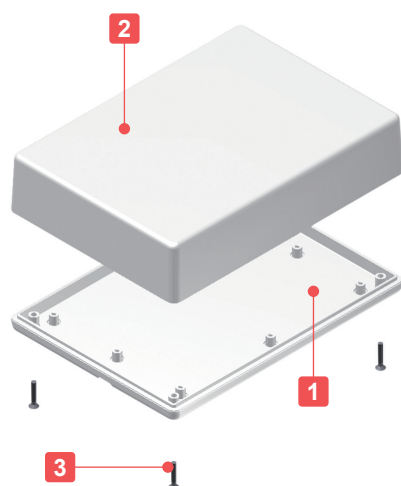

- Universal plastic enclosure with screw fastening.
- 26 sizes are available in 2 colors; Black (ABS UL94HB) and Off-white (ABS UL94V-0).
- Suitable for measuring instruments, testing devices, wireless communication devices, medical devices, and more.

Components

No.	Part name	Pcs	Material : Color / Finish
1	Cover	1	TW : ABSUL94HB / Black
			TWN : ABS UL94V-0 / Off-white
2	Bottom base	1	TW : ABSUL94HB / Black
			TWN : ABS UL94V-0 / Off-white
3	Self-tapping screw	2 or 4	TW : Steel / Black trivalent chromate
			TWN : Steel / Nickel plated


Accessories (Optional parts)




Silicone band SIB series
See page 90



Suspension bracket WM series
See page 391



Embedded battery box BC series
See page 381 ~ 383



Universal PCB PCB series
See website



Adhesive standoff AST series
See page 394




PCB mounting screw EM series
See page 398



Tapping standoff TPS series
See page 397

Color Type

Series	Code	Color	Screw
TW	B	Black	Black trivalent chromate
TWN	W	Off-white	Nickel plated

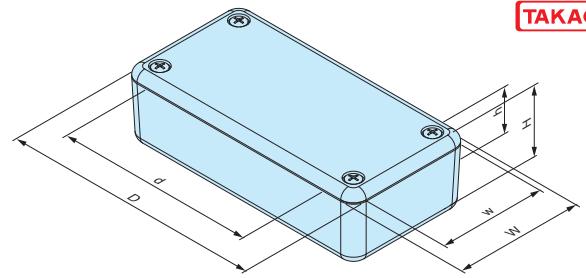

TW series (ABS UL94HB)

■ DXF/DWG/PDF/STP drawings available on our website.

Product no. / Details

Product no.	External dimensions			Internal dimensions			Screw (Self-tapping flat head)	Weight (g)
	W	H	D	w	h	d		
TW 4-2- 5B	35	20	50	28.2	12	32.6	M2.6-12 x 2 pcs	13.5
TW 4-2- 6B	35	20	60	28.2	12	42.6	M2.6-12 x 2 pcs	15.5
TW 4-2- 8B	40.3	20	80.3	33.5	12	62.5	M2.6-12 x 2 pcs	22
TW 5-2- 5B	50	15	50	42.8	7	31.9	M2.6-12 x 4 pcs	18
TW 5-2- 7B	50	15	70	43.2	7	52.9	M2.6-12 x 4 pcs	22
TW 5-3- 5B	50	25	50	42.8	17	31.9	M2.6-12 x 4 pcs	22
TW 5-3- 7B	50	27.5	70	43.2	19.5	52.9	M2.6-12 x 4 pcs	29
TW 5-3- 9B	45	25	90	37.7	16	69.4	M3-12 x 4 pcs	30.5
TW 5-3-10B	50	30	100	42.4	20.8	80.8	M2.6-12 x 4 pcs	41.5
TW 5-4- 7B	50	40	70	42.5	32	52.9	M2.6-12 x 4 pcs	35
TW 7-2-11B	70	20	105	61.2	10.5	83	M2.6-14 x 4 pcs	56.5
TW 7-3-13B	65	25.6	130	55.3	14.3	105	M3-16 x 4 pcs	76
TW 7-4-11B	70	35	105	61.2	25.5	83	M2.6-14 x 4 pcs	70
TW 7-5-11B	70	50	105	61.1	40.5	83	M2.6-14 x 4 pcs	83
TW 7-5-13B	65	50.1	130	55.3	38.8	105	M3-16 x 4 pcs	100
TW 8-2- 8B	80	20	80	71.6	10.5	59	M2.6-12 x 4 pcs	49
TW 8-4- 8B	80	40	80	71.6	30.5	59	M2.6-12 x 4 pcs	65
TW 9-4-17B	85.5	35.5	170	75.7	24	143	M3-16 x 4 pcs	133
TW 9-6-17B	85.5	60.5	170	75.7	49	143	M3-16 x 4 pcs	168
TW11-5-22B	110	45.3	220	100.1	33.8	191	M3-16 x 4 pcs	223
TW11-8-22B	110	75.3	220	99.3	63.8	191	M3-16 x 4 pcs	277
TW13-3-13B	125	25	125	114.5	13.7	100	M3-16 x 4 pcs	135
TW13-3-18B	125	25	175	114.5	13.7	148	M3-16 x 4 pcs	184.5
TW13-5-13B	125	45	125	114.5	33.7	100	M3-16 x 4 pcs	165.5
TW13-5-18B	125	45	175	114.5	33.7	148	M3-16 x 4 pcs	218
TW13-7-18B	125	65	175	114.2	53.7	148	M3-16 x 4 pcs	254

TWN series (ABS UL94V-0)

Product no. / Details

Product no.	External dimensions			Internal dimensions			Screw (Self-tapping flat head)	Weight (g)
	W	H	D	w	h	d		
TWN 4-2- 5W	35	20	50	28.2	12	32.6	M2.6-12 x 2 pcs	16.5
TWN 4-2- 6W	35	20	60	28.2	12	42.6	M2.6-12 x 2 pcs	18
TWN 4-2- 8W	40.3	20	80.3	33.5	12	62.5	M2.6-12 x 2 pcs	26
TWN 5-2- 5W	50	15	50	42.8	7	31.9	M2.6-12 x 4 pcs	20
TWN 5-2- 7W	50	15	70	43.2	7	52.9	M2.6-12 x 4 pcs	24.5
TWN 5-3- 5W	50	25	50	42.8	17	31.9	M2.6-12 x 4 pcs	26
TWN 5-3- 7W	50	27.5	70	43.2	19.5	52.9	M2.6-12 x 4 pcs	33
TWN 5-3- 9W	45	25	90	37.7	16	69.4	M3-16 x 4 pcs	35
TWN 5-3-10W	50	30	100	42.4	20.8	80.8	M2.6-12 x 4 pcs	46.5
TWN 5-4- 7W	50	40	70	42.5	32	52.9	M2.6-12 x 4 pcs	39.5
TWN 7-2-11W	70	20	105	61.2	10.5	83	M2.6-14 x 4 pcs	64.5
TWN 7-3-13W	65	25.6	130	55.3	14.3	105	M3-16 x 4 pcs	85
TWN 7-4-11W	70	35	105	61.2	25.5	83	M2.6-14 x 4 pcs	80
TWN 7-5-11W	70	50	105	61.1	40.5	83	M2.6-14 x 4 pcs	94.5
TWN 7-5-13W	65	50.1	130	55.3	38.8	105	M3-16 x 4 pcs	115.5
TWN 8-2- 8W	80	20	80	71.6	10.5	59	M2.6-12 x 4 pcs	55.5
TWN 8-4- 8W	80	40	80	71.6	30.5	59	M2.6-12 x 4 pcs	75
TWN 9-4-17W	85.5	35.5	170	75.7	24	143	M3-16 x 4 pcs	151
TWN 9-6-17W	85.5	60.5	170	75.7	49	143	M3-16 x 4 pcs	191
TWN11-5-22W	110	45.3	220	100.1	33.8	191	M3-16 x 4 pcs	254
TWN11-8-22W	110	75.3	220	99.3	63.8	191	M3-16 x 4 pcs	316
TWN13-3-13W	125	25	125	114.5	13.7	100	M3-16 x 4 pcs	156.5
TWN13-3-18W	125	25	175	114.5	13.7	148	M3-16 x 4 pcs	206.5
TWN13-5-13W	125	45	125	114.5	33.7	100	M3-16 x 4 pcs	190
TWN13-5-18W	125	45	175	114.5	33.7	148	M3-16 x 4 pcs	249
TWN13-7-18W	125	65	175	114.2	53.7	148	M3-16 x 4 pcs	290.5




TWSC series**SILICONE PROTECTOR for TW•TWN****Color Type**

Code	Y Yellow	N Navy	L Light gray	B Black
Color				

- Silicone Protector for TW and TWN series. Selectable in 4 colors.
- Available as a set of 2 pcs.
- Use caution when assembling. Overtightening may damage the enclosure and silicone protectors.

TWSC dimensions

■ DXF/DWG/PDF drawings available on our website.

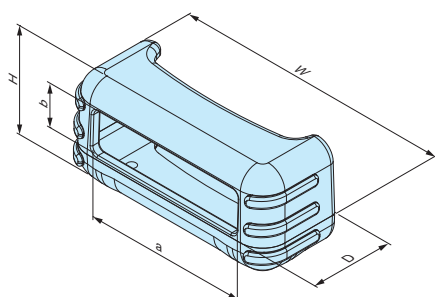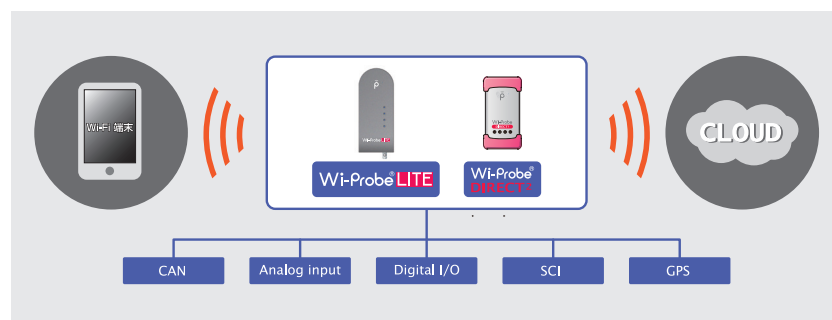**APPLICATION EXAMPLE****Wi-Probe DIRECT2 Monitoring Device**

*Pink shown above is custom color.

Components


Part name	Pcs	Material	Color / Finish
Silicone protector	1 set (2 pcs)	Silicone	Yellow • Navy • Light gray • Black
Self-tapping screw	4	Steel M3-20	Black trivalent chromate

Product no. / Details

■ Please suffix color code at the end of the product number.

Product no.	W	H	D	a	b	Suitable models	Weight (g)
TWSC 7-3□	71	32	27	52	13.5	TW • TWN 7-3-13	41
TWSC 7-5□	71	56	27	52	37.5	TW • TWN 7-5-13	47.5
TWSC 9-4□	91.5	41.5	33	67	22	TW • TWN 9-4-17	60
TWSC 9-6□	91.5	66.5	33	67	46.5	TW • TWN 9-6-17	75
TWSC11-5□	116	51.5	40	80	29	TW • TWN11-5-22	102.5
TWSC11-8□	116	81.5	40	80	58	TW • TWN11-8-22	122
TWSC13-5□	131	51	38	101	29.5	TW • TWN13-5-13 TW • TWN13-5-18	104
TWSC13-7□	131	71	38	101	48.5	TW • TWN13-7-18	117

- Custom color is available from just 1 set. For 500 sets or more, manufacturing costs will be similar to a standard color. Please inquire for more details. For custom color order, please specify **PANTONE®** color code.

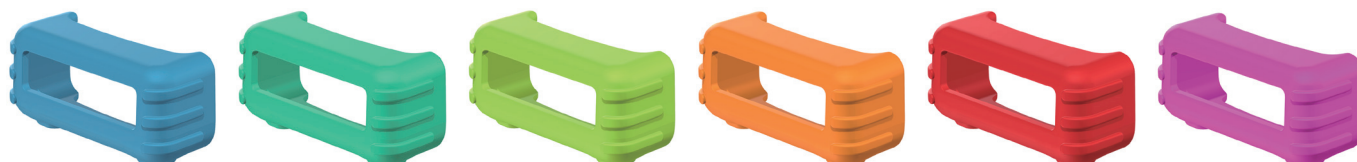

SIB series**SILICONE BAND**


Utilization example



- Silicone band designed to fit TW and TWN series.
Refer to the table below for size suitability.
- Silicone band provides both shock resistance and non-slip grips for the TW & TWN enclosures.

Color Type

Code	R Red	O Orange	Y Yellow	G Green	C Cyan	N Navy	L Light gray	B Black
Color								

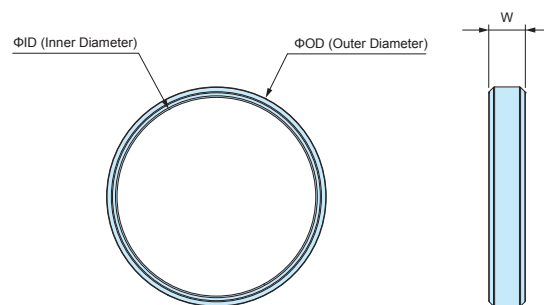SIB dimensions**Components**

Part name	Pcs	Material	Color
Silicone band	Pair (2 pcs)	Silicone	Red • Orange • Yellow • Green • Cyan • Navy • Light gray • Black

Product no. / Details

■ Please suffix color code at the end of the product number.

Product no.	W	ID	OD	Suitable models	Weight (g)
SIB-21□	6	21	25	TW • TWN4-2-5 • 4-2-6 • 4-2-8 • 5-2-5 • 5-2-7 • 5-3-9	2
SIB-38□	7	38	42	TW • TWN5-3-5 • 5-3-7 • 5-4-7 • 5-3-10 • 7-2-11 • 7-4-11 7-3-13 • 8-2-8	4
SIB-58□	8	58	63	TW • TWN7-5-11 • 7-5-13 • 8-4-8 • 9-4-17	10
SIB-72□	10	72	77	TW • TWN9 -6-17 • 11-5-22 • 11-8-22 • 13-3-13 • 13-5-13 13-3-18 • 13-5-18 • 13-7-18	14

TWF series FLANGED PLASTIC ENCLOSURE

Multi-purpose flanged enclosure designed for use as a wall-mounted device/terminal.

23 different sizes in 2 colors available.

Recommended to be used as measurement instruments, wireless communication gadgets, controller devices and more.

APPLICATION EXAMPLE

EtherCAT Device



Solar Panel Charge Controller



Wireless RFID Tag Search Device



RFID Tag



CO₂ Sensor



Temperature • Humidity Sensor



Remote Power Control Unit



Communication Converter



Roof Sprinkler Controller




LED Lighting RGB Controller



Private LoRA Gateway




Contact Relay Output Converter

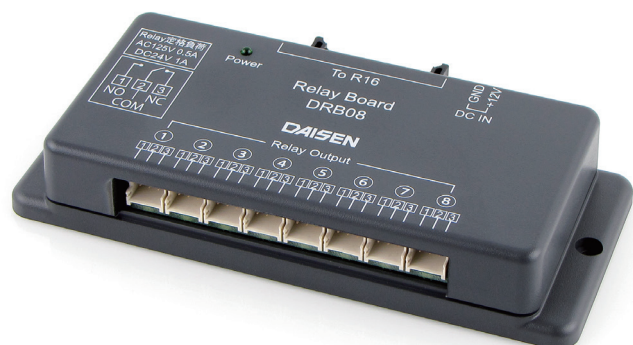



Technical Data

Protection class: IP40
Operating temperature: -10°C ~ +60°C

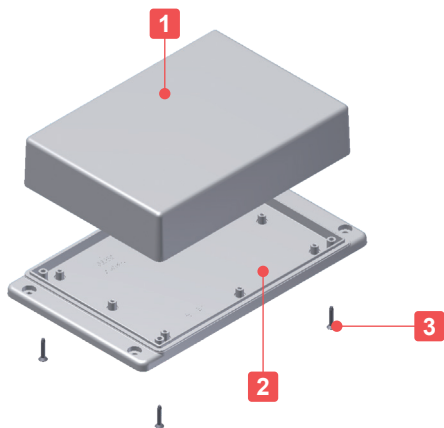

- Multi-purpose flanged enclosure designed for use as a wall-mounted device/terminal.
- 23 different sizes in 2 colors. Made of ABS UL94V-0.
- Equipped with screwing bosses for PCB.
- Recommended to be used as measurement instruments, wireless communication gadgets, controller devices and more.

Components

No.	Part name	Pcs	Material	Color / Finish
1	Cover	1	ABS UL94V-0	Off-white • Dark gray
2	Flanged base	1	ABS UL94V-0	Off-white • Dark gray
3	Self-tapping screw	2 / 4	Steel	Nickel plated • Black trivalent chromate

Accessories (Optional parts)



Tapping standoff TPS series
See page 397




PCB mounting screw EM-2.3
See page 398



TORX screw MR series
See page 398

TWF dimensions

■ DXF/DWG/PDF/STP drawings available on our website.

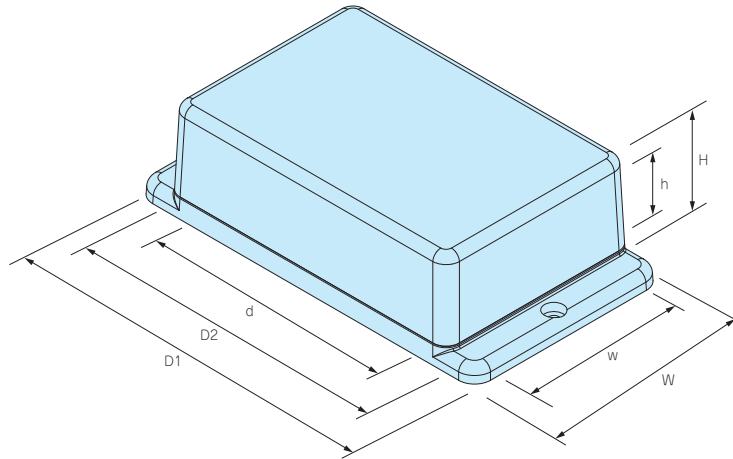

Color Type


Code	Cover	Flanged base	Screw
W	Off-white	Off-white	Nickel plated
D	Dark gray	Dark gray	Black trivalent chromate

Product no. / Details

Product no.		External dimensions				Internal dimensions			Screw	Weight (g)
● Off-white	● Dark gray	W	H	D1	D2	w	h	d		
TWF 4-2- 5W	TWF 4-2- 5D	35.4	22	70.4	50	27.2	13.2	32.4	M2.6-12 x 2 pcs	19.7
TWF 5-2- 5W	TWF 5-2- 5D	50.4	17	70.4	50	42.7	8	31.9	M2.6-12 x 4 pcs	21.5
TWF 5-2- 7W	TWF 5-2- 7D	50.4	17	90.4	70	43.1	8	52.9	M2.6-12 x 4 pcs	29
TWF 5-3- 5W	TWF 5-3- 5D	50.4	27	70.4	50	42.7	18	31.9	M2.6-12 x 4 pcs	26.5
TWF 5-3- 7W	TWF 5-3- 7D	50.4	29.5	90.4	70	43.1	20.5	52.9	M2.6-12 x 4 pcs	36
TWF 5-3- 9W	TWF 5-3- 9D	45.6	27.5	111	90	37.2	17.5	70.4	M2.6-12 x 4 pcs	43
TWF 5-4- 7W	TWF 5-4- 7D	50.4	42	90.4	70	42.5	33	52.9	M2.6-12 x 4 pcs	43.5
TWF 7-2-11W	TWF 7-2-11D	70.6	20.5	127	105	61.4	10.5	83	M2.6-12 x 4 pcs	66.5
TWF 7-3-13W	TWF 7-3-13D	65.5	25.5	150	130	57.7	14.2	105	M3 -16 x 4 pcs	87
TWF 7-4-11W	TWF 7-4-11D	70.6	35.5	127	105	61.4	25.5	83	M2.6-12 x 4 pcs	82
TWF 7-5-11W	TWF 7-5-11D	70.6	50.5	127	105	61.1	40.5	83	M2.6-12 x 4 pcs	96.5
TWF 7-5-13W	TWF 7-5-13D	65.5	50	150	130	55.9	38.7	105	M3 -16 x 4 pcs	114
TWF 8-2- 8W	TWF 8-2- 8D	80.6	23.5	100.6	80	71.5	13.5	59	M2.6-12 x 4 pcs	62
TWF 8-4- 8W	TWF 8-4- 8D	80.6	43.5	100.6	80	71.5	33.5	59	M2.6-12 x 4 pcs	82
TWF 9-4-17W	TWF 9-4-17D	86	35	190	170	76.5	23.7	143	M3 -16 x 4 pcs	150
TWF 9-6-17W	TWF 9-6-17D	86	60	190	170	75.7	48.7	143	M3 -16 x 4 pcs	184
TWF11-5-22W	TWF11-5-22D	110.3	45	250.6	220	100.8	33.7	191	M3 -16 x 4 pcs	250
TWF11-8-22W	TWF11-8-22D	110.3	75	250.6	220	99.3	63.7	191	M3 -16 x 4 pcs	303
TWF13-3-13W	TWF13-3-13D	125.6	25	155.6	125	114.5	13.7	100	M3 -16 x 4 pcs	155
TWF13-3-18W	TWF13-3-18D	125.6	25	205.6	175	114.5	13.7	148	M3 -16 x 4 pcs	199
TWF13-5-13W	TWF13-5-13D	125.6	45	155.6	125	114.5	33.7	100	M3 -16 x 4 pcs	189
TWF13-5-18W	TWF13-5-18D	125.6	45	205.6	175	114.5	33.7	148	M3 -16 x 4 pcs	242
TWF13-7-18W	TWF13-7-18D	125.6	65	205.6	175	114.2	53.7	148	M3 -16 x 4 pcs	281

STP series

STRAP

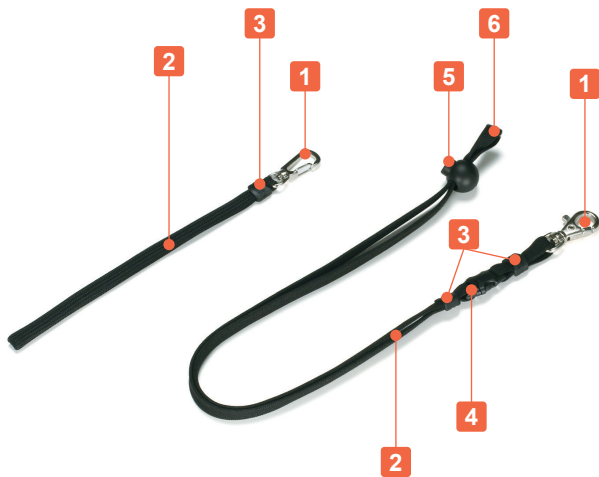

- Strap with a metal hook
- Recommended to be used with CR key ring.


Wrist strap (STP-200)



Neck strap (STP-450)



Neck strap detail

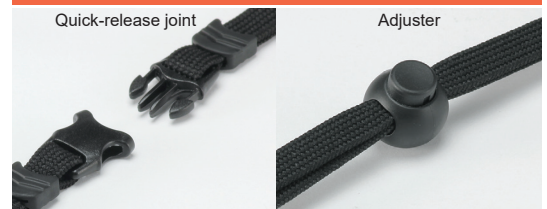

- Only the neck strap has a joint and an adjuster.

Components

No.	Part name	Pcs	Material	Color / Finish
1	Metal hook	1	Diecast zinc & steel	Nickel plated
2	Strap	1	Nylon / Polyester	Black
3	Cap	1 / 2	Polyurethane / Elastomer	Black
4	Joint (Neck strap only)	1	Polyacetal	Black
5	Adjuster (Neck strap only)	1	Nylon	Black
6	Clamp (Neck strap only)	1	PE	Black

Product no. / Details

Product no.	Strap width	Strap length	Strap material	Cap material
STP-200	8	200	Nylon	Polyurethane x 1
STP-450	10	450	Polyester	Elastomer x 2


CR-20

KEY RING




- Hole milling is required for case installation.

CR-20 dimensions



- DXF/DWG/PDF drawings available on our website.

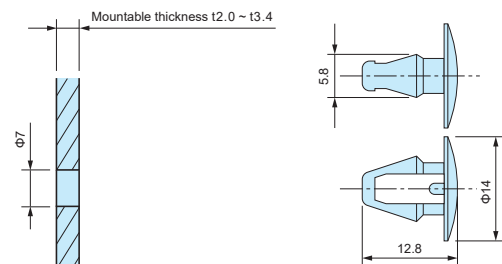

Components

Part name	Material	Color / Finish
Ring	SWRM 6 Steel	Nickel plated
Insert clip	Nylon	Black

Product no. / Details

Product no.	Ring Φ	Installation hole	Mounting thickness
CR-20	Φ19	Φ7	t2.0 ~ t3.4


PROTECTION CLASS (IP RATING)

IP67
is


● IEC60529 standard is a system for classifying the degrees of protection provided by the enclosures of electrical equipment, such as against dust and water.

IP

First digit : Solid particle protection





No.	Protection against ingress of solid foreign objects	Protection against access to hazardous parts
0	No Protection	No Protection
1	 Protected against solid objects over 50mm.	 Protected against accidental touch by a large surface of the body, such as by hands. (Tested with a 50mm diameter steel ball.)
2	 Protected against solid objects over 12.5mm.	 Protected against accidental touch by fingers or similar objects (Tested with a 12mm diameter, 80mm long articulated finger)
3	 Protected against solid objects over 2.5mm.	 Protected against accidental touch by tools or thick wires. (Tested with a 2.5mm diameter, 100mm long bar)
4	 Protected against solid objects over 1.0mm.	 1.0 Protected against accidental touch by most wires and screws. (Tested with a 1.0mm diameter, 100mm long wire)
5	 Protected against dust; limited ingress, no harmful deposits.	
6	 Complete protection against dust.	

69K



80 to 100 barrel steam jets at 80°C (±5°C) from a 0°, 30°, 60°, and 90° angle, at a distance of 100 ~ 150mm for 30 sec x 5 sets

Second digit: Liquid ingress protection


No.	Protection against ingress of liquid
0	No Protection
1	 Dripping water (vertically falling drops) for 10 minutes.
2	 Vertically dripping water when tilted at 15° for 10 minutes (2.5 minutes per position).
3	 Spraying water (at any angle) of 0.07l/min up to 60° from the vertical for 10 minutes.
4	 Spraying water of 0.07l/min from all directions for 10 minutes.
5	 Jets of water projected by a φ6.3 nozzle of 12.5l / min from all directions at 1 min / 1m for at least 3 minutes.
6	 Powerful jets of water projected by a φ12.3 nozzle of 100l / min from all directions at 1 min / 1m for at least 3 minutes.
7	 Immersion, up to 1 meter depth (for 30 mins).
8	 Immersion (test depth and duration beyond IPX7 requirements)

A point of note for Waterproof Boxes

- For outdoor use, direct sunlight will accelerate the degradation of the box. For more information, please see page Outdoor Use - 1.
- For customers planning to attach their own original mounting brackets onto the waterproof boxes, it is recommended to mill larger holes with enough clearance to attach the bracket. If the milled hole and clearance is too small, it may cause irreparable damage to the box.
- Waterproof boxes made of Polycarbonate or ABS plastic material may be damaged if certain types of washing chemicals, solvents, oils, or thread locking adhesives are present on the box. Furthermore, paint not suitable to be used on plastic materials may also cause damage.

TAKACHI

SHOW IT THROUGH SKELETON CASE

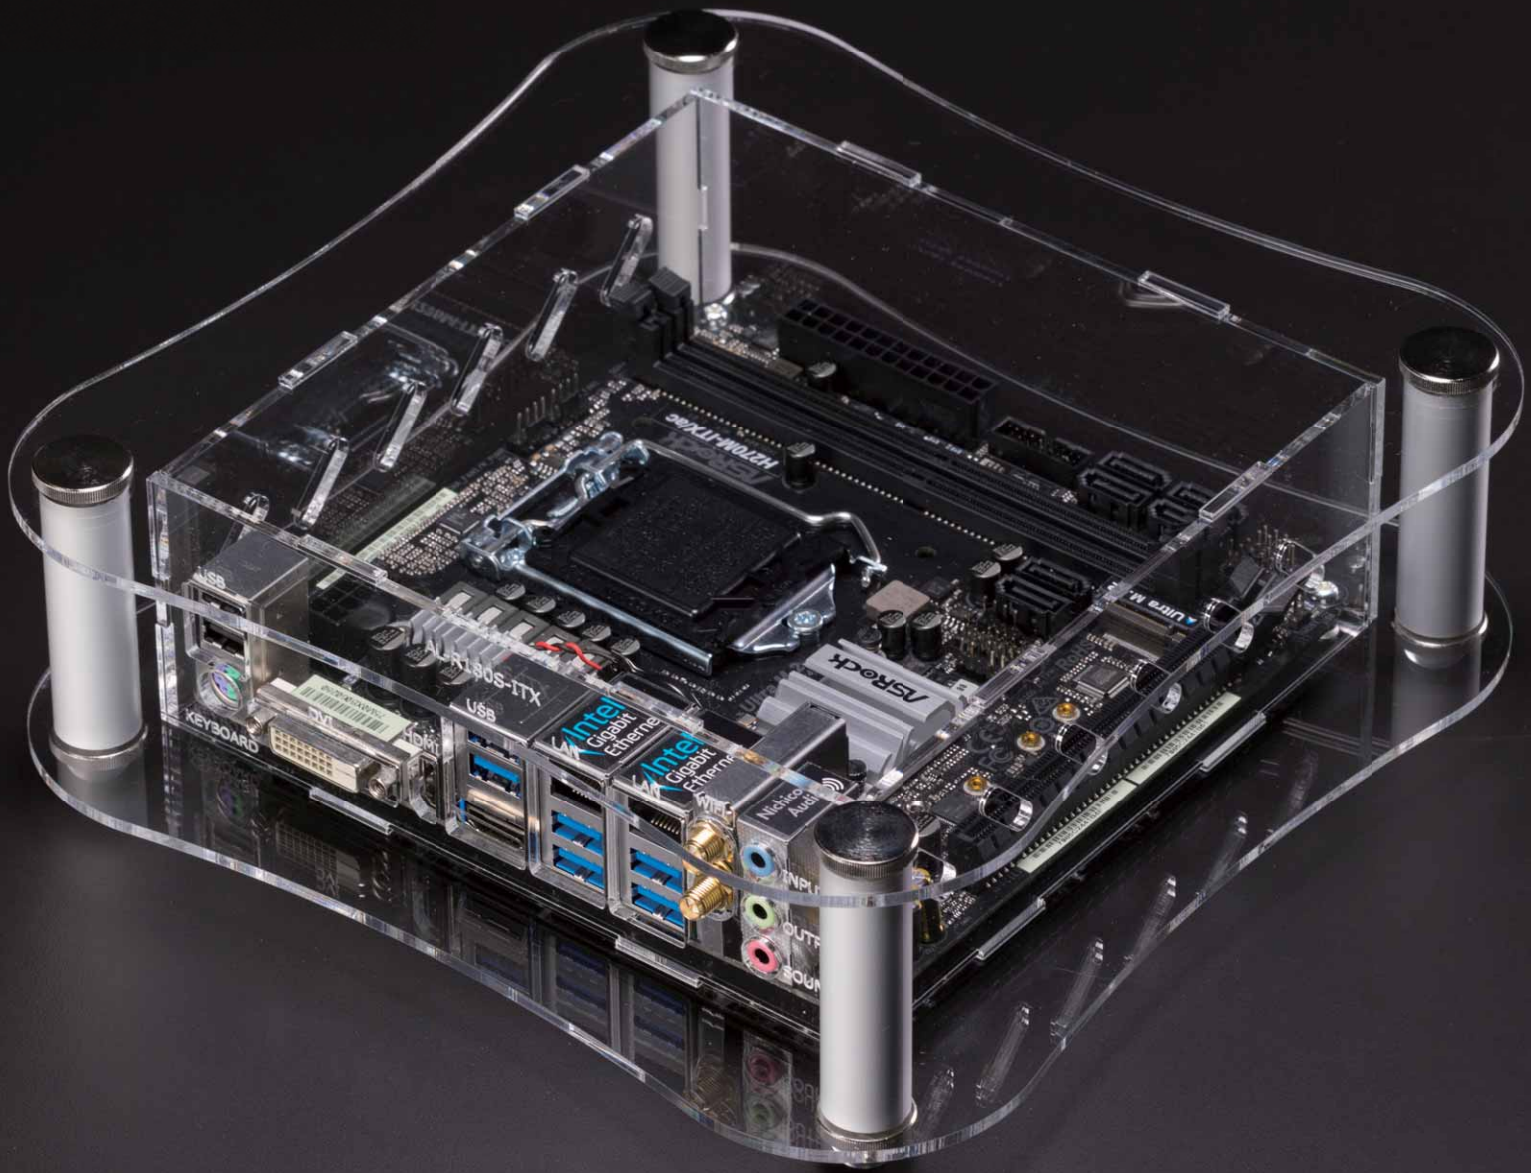


CASE BOX RACK & CUSTOM

TAKACHI ELECTRONICS ENCLOSURE CO., LTD.

SHOW IT THROUGH SKELETON CASE

An elegant and sophisticated curved design acrylic case with stylish aluminium pillars at the corners. Perfect for exhibitions or demonstration events to both showcase the internals and provide a unique product visual appeal.

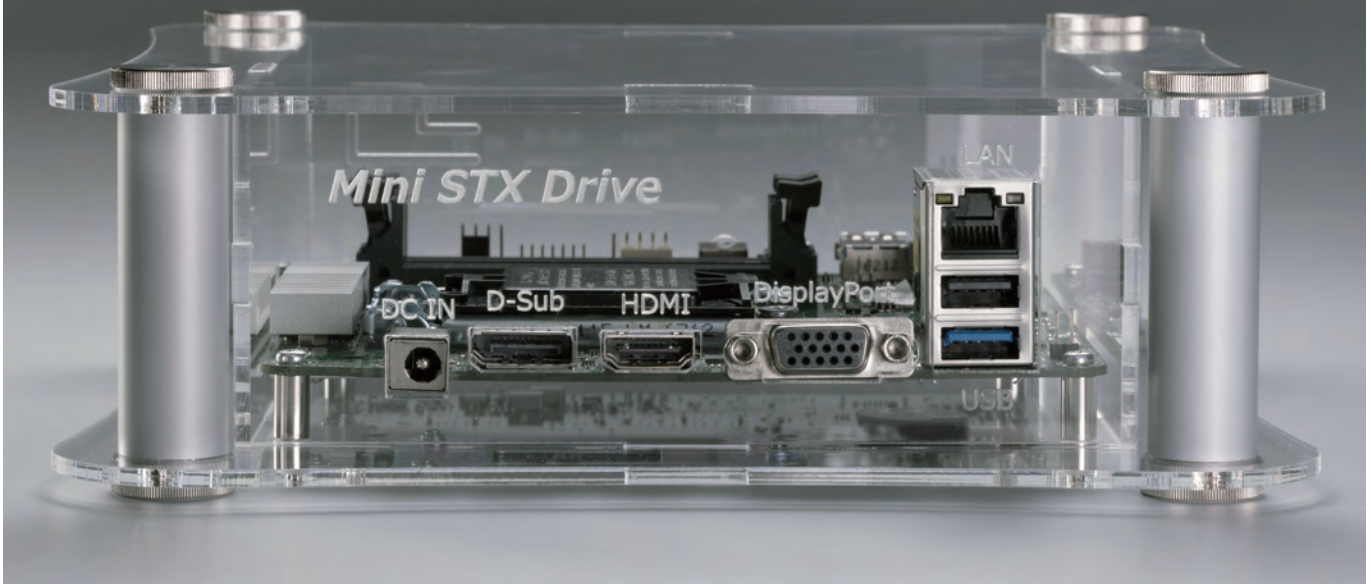

Easy Assembly Curved Design Case



Custom Sized Cases Available

Custom sized cases are available 50 ~ 500 width / length(depth) and 30 ~ 500 height in 1mm intervals.

See SKLF series on our website for further details.



CUSTOMIZATION POSSIBILITIES



Printing


Print your logo, text and more using our customization services, such as inkjet printing.



Color Variation

Available in different color types, as well as smoked / tinted shades.

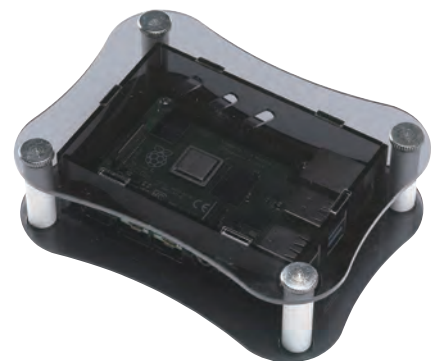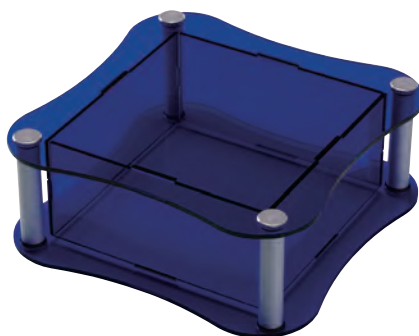

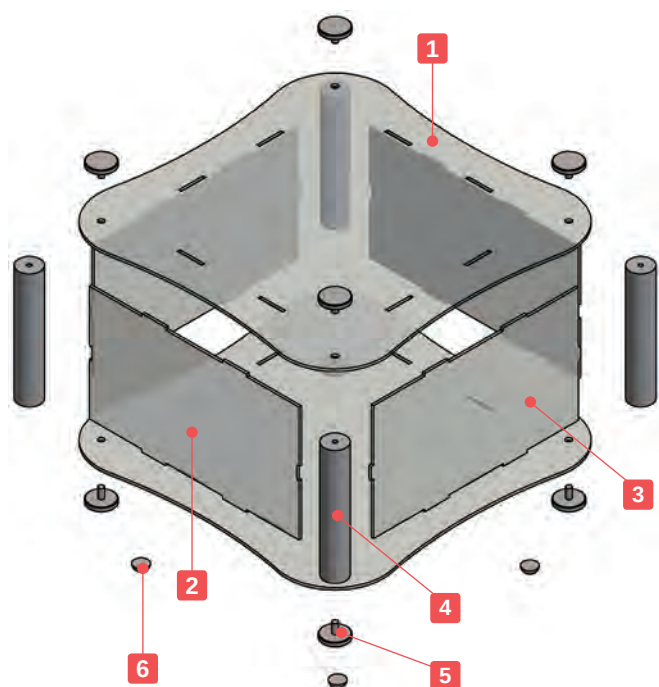

- Curved transparent acrylic case with corner support columns.
- 5 different sizes are available.
- Usable as a display enclosure for a unique and luxurious outlook.
- SKL11-5-17 and 11-8-17 models are compatible with the Euro Board.
SKL18-7-18 and 18-10-18 models are compatible with the Mini ITX board.
- Possible to be used in a flat layout, or a standing layout.
- Knurled thumb screws for easy hand assembly.
- Custom sized cases are available. See SKLF series on our website for further details.


※Ethanol or other alcoholic solvents may cause the acrylic panel to crack. Use a neutral cleaner or specialized acrylic cleaning solvent for cleaning.

Components

No.	Part name	Pcs	Material	Color / Finish
1	Top · Bottom cover	1 each	Acrylic	Transparent
2	W panel	2	Acrylic	Transparent
3	D panel	2	Acrylic	Transparent
4	Pillar	4	Extruded aluminium A6063S-T5	Silver / Anodized
5	Knurled thumb screw	8	Brass	Nickel plated
6	Rubber feet	4	Polyurethane	Transparent

SKL dimensions


■ DXF/DWG/PDF/STP drawings available on our website.

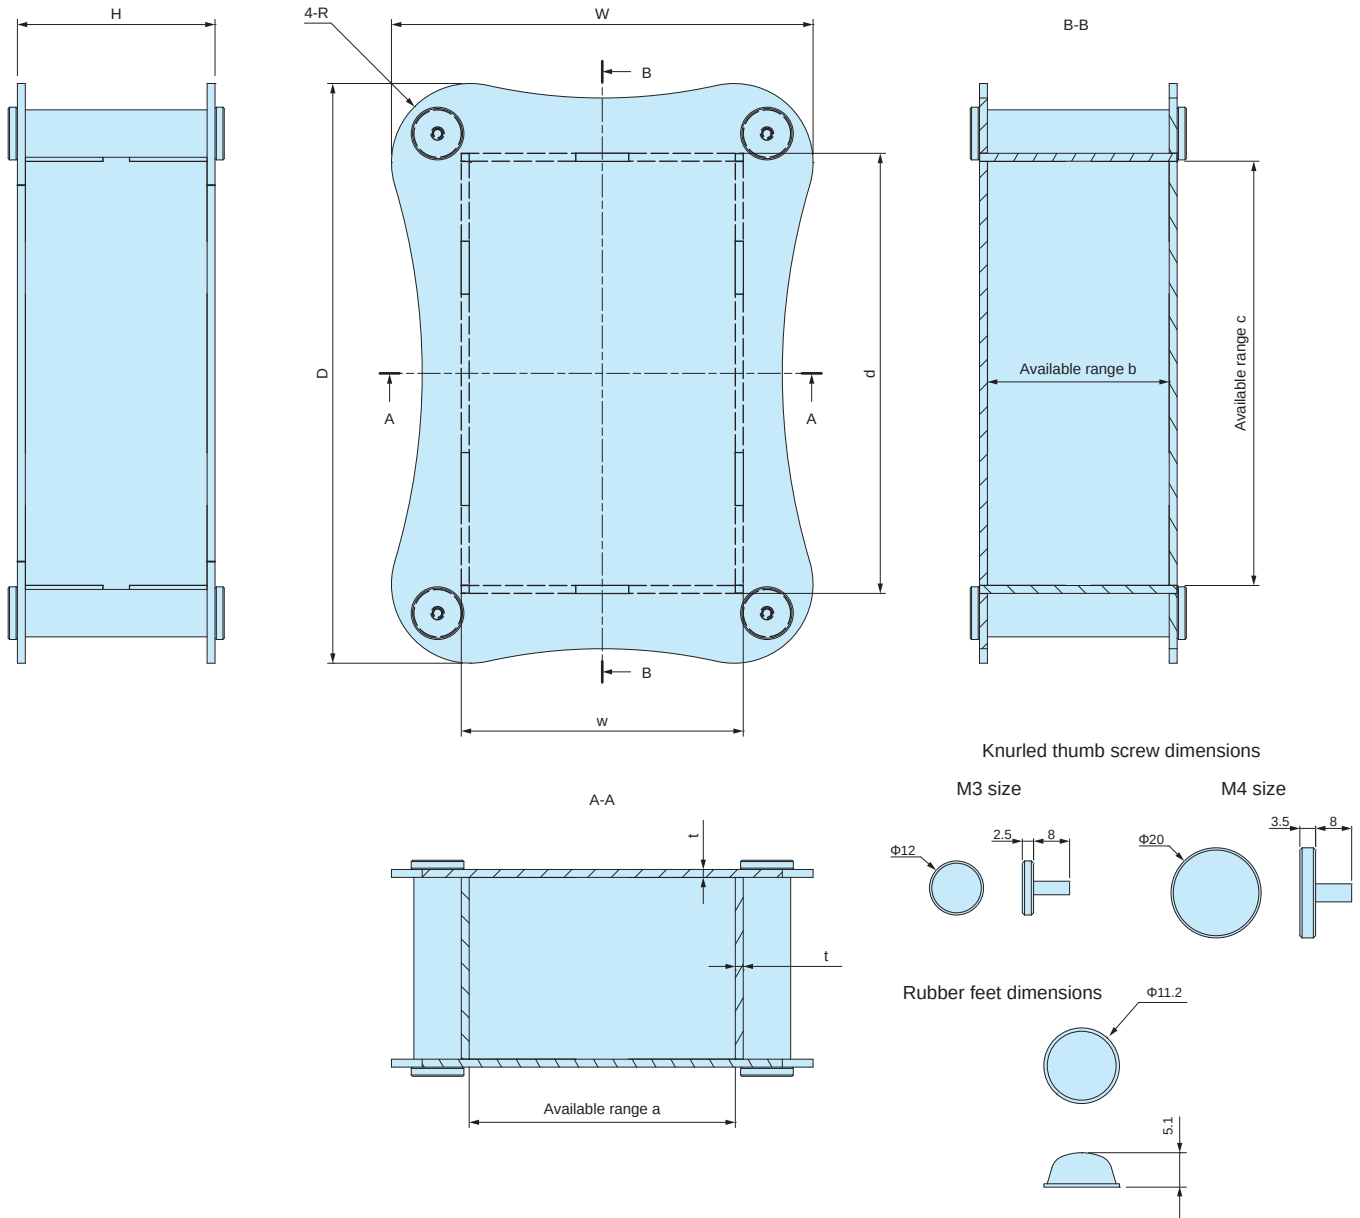


Product no. / Dimensions


Product no.	External dimensions			Case dimensions		Available range			R	t	Screw size	Weight (g)
	W	H	D	w	d	a	b	c				
SKL10- 5-10	141	51	141	105	105	101	47	101	25	2	M3	191.5
SKL11- 5-17	165	47	225	107	167	101	41	161	25	3	M4	507
SKL11- 8-17	165	77	225	107	167	101	71	161	25	3	M4	643
SKL18- 7-18	239	67	239	177	177	171	61	171	40	3	M4	762
SKL18-10-18	239	102	239	177	177	171	96	171	40	3	M4	940.5

Accessories (Optional parts)

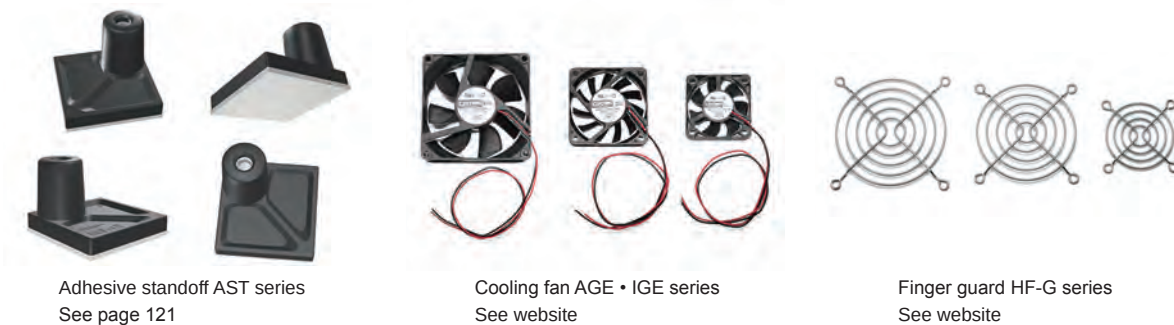

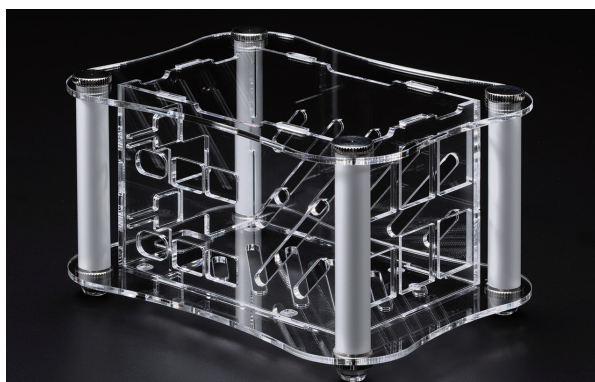

RPA-4B-1F is compatible with VESA Mount Standards (100 x 100mm), and can be installed on the back side of PC displays, etc.

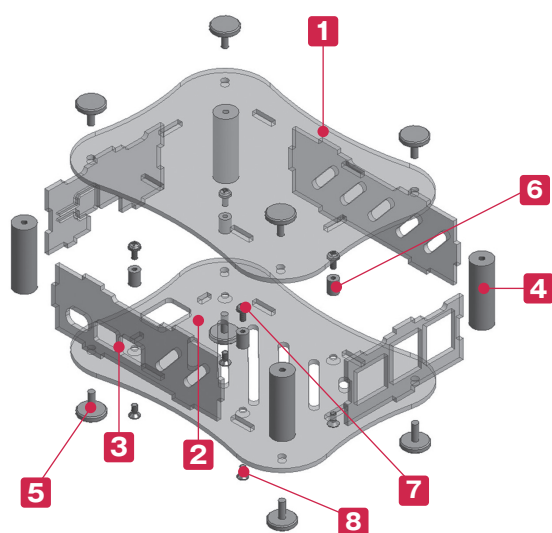

- Exclusively for use with Raspberry Pi models.
- 3 different types - Single desktop, Dual desktop, and Single flanged - are available.
- New size for Raspberry Pi 5 is now available.
- The panel power button part may easily bend when the board is not installed.
- Raspberry Pi board is not included.

※Ethanol or other alcoholic solvents may cause the acrylic panel to crack.
Use a neutral cleaner or specialized acrylic cleaning solvent for cleaning.

Technical Data

Operating temperature : -30°C ~ +60°C

※Included screws :

RPA-4B • 5-1 Knurled thumb screw x 8

RPA-4B • 5-2 Knurled thumb screw x 8

RPA-4B • 5-1F Knurled thumb screw x 4


M3-8 flat head, Trivalent chromate x 4

Components


No.	Part name	Pcs	Material	Color / Finish
1	Top cover	1	Acrylic t=2.0	Transparent
2	Bottom cover	1	Acrylic t=2.0	Transparent
3	Panel	4	Acrylic t=2.0	Transparent
4	Pillar	4	Extruded aluminium A6063S-T5	Silver / Anodized with clear coating
5	Knurled thumb screw (M3-8)※	4 / 8	Brass	Nickel plated
6	Standoff (for board)	4	Brass	Nickel plated
7	Screw for Board (M2.5-4 pan head)	4	Steel	Trivalent chromate
8	Screw for Standoffs (M2.5-5 flat head)	4	Steel	Trivalent chromate

RPA dimensions


RPA-4B-1
RPA-5-1 (Single desktop)

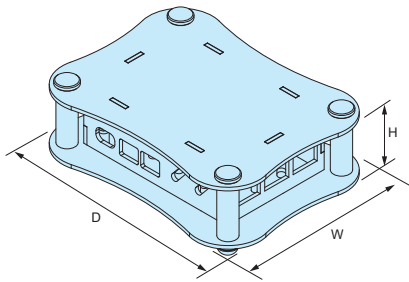

RPA-4B-2
RPA-5-2 (Dual desktop)

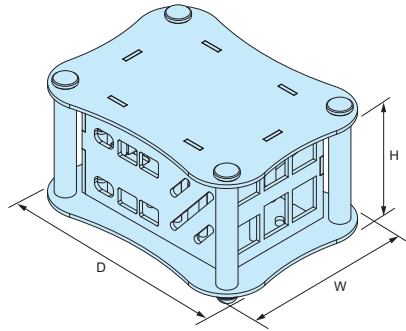

RPA-4B-1F
RPA-5-1F (Single flanged)

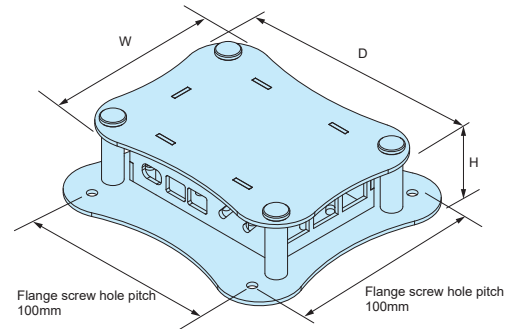

■ DXF/DWG/PDF/STP drawings available on our website.

Product no. / Details

Product no.	External Dimension			Suitable model	Included accessory	Weight(g)
	W	H	D			
RPA-4B-1	95	34	125	Raspberry Pi 4B	Rubber feet	118
NEW RPA-5-1	95	34	125	Raspberry Pi 5	Rubber feet	113.5
RPA-4B-2	95	62	125	Raspberry Pi 4B	Rubber feet Round spacer (M2.5-25)	171.5
NEW RPA-5-2	95	62	125	Raspberry Pi 5	Rubber feet Round spacer (M2.5-25)	166.5
RPA-4B-1F	95	34	125	Raspberry Pi 4B	—	118.5
NEW RPA-5-1F	95	34	125	Raspberry Pi 5	—	113.5

■ Rubber feet : Synthetic rubber / Semi-transparent • Round spacer : Brass / Nickel plated

Raspberry Pi Case Customization

Unique Logo (Inkjet printing)


See page Custom-7~8, as well as our website for further details.

Various print processing methods are available, with no Minimum Order Quantity requirement!



Color Variation

Available in different color types, as well as smoked / tinted shades.

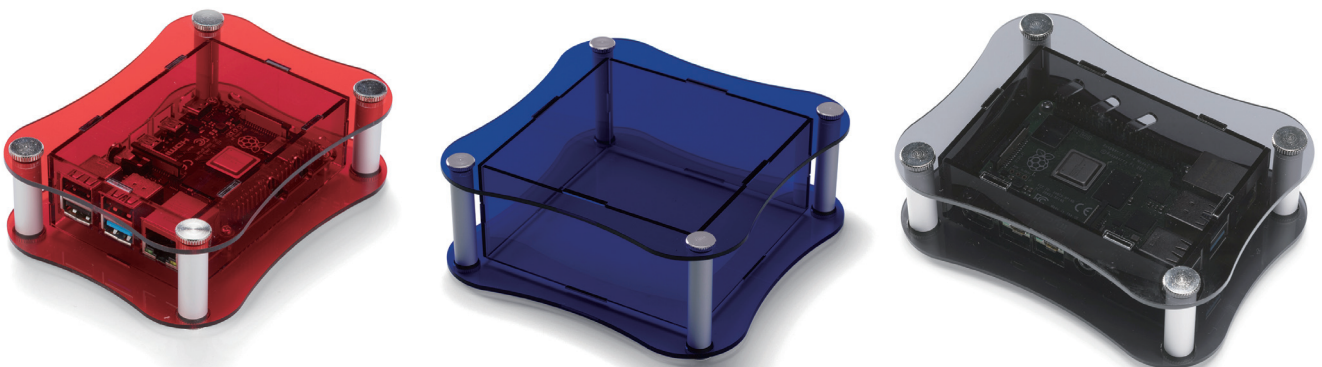


SW•SW-N•SW-T

COMPACT SNAP-IN PLASTIC CASE



Technical Data

Protection class: IP40
 Operating temperature:
 SW-SW-N: -10°C ~ +60°C
 SW-T: -10°C ~ +100°C

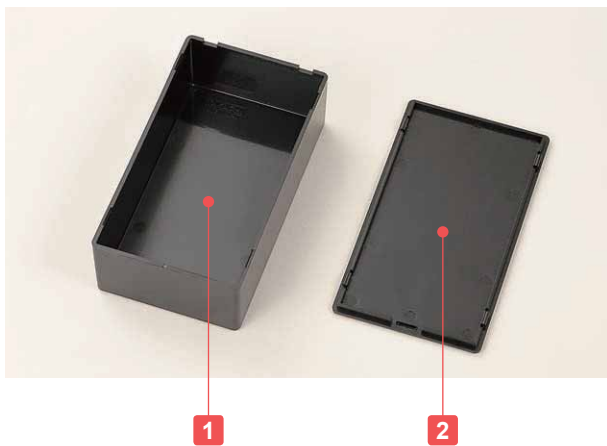

- No screws required; simple snap on / off cover.
- General purpose compact type case.
- Ample interior space.
- Exclusive PCB is available.
- 3 different material types (standard, flame-resistant, and heat-resistant) are available.

Components

No.	Part name	Material / Color
1	Base	SW : ABS UL94HB / Light gray • Black
		SW-N : ABS UL94V-1 : UL94V-0 / Gray
		SW-T : ABS heat-resistant / Black
2	Cover	SW : ABS UL94HB / Light gray • Black
		SW-N : ABS UL94V-1 : UL94V-0 / Gray
		SW-T : ABS heat-resistant / Black


Accessories (Optional parts)



Adhesive standoff T-600, 700, ASR
 See page Standoff-1

Neodymium magnet NMG series
 See page NMG-1

SW•SW-N•SW-T dimensions



■ Drawings below are reference examples only.
DXF/DWG/PDF drawings available on our website.

Color Type

Series	Code	Color
SW	S	Light gray
	B	Black
SW-N	G	Gray
SW-T	B	Black

SW standard (ABS UL94HB)

Product no. / Dimensions

Product no.		Dimensions			Weight (g)
● Light gray	● Black	W	H	D	
SW- 15S	SW- 15B	10	10	15	1
SW- 20S	SW- 20B	15	15	20	2
SW- 30S	SW- 30B	20	18	30	4
SW- 40S	SW- 40B	30	20	40	10
SW- 50S	SW- 50B	35	25	50	14
SW- 53S	SW- 53B	36	11	53	10
SW- 55S	SW- 55B	40	20	55	17
SW- 60S	SW- 60B	18	17	60	9
SW- 65S	SW- 65B	45	25	65	21
SW- 75S	SW- 75B	50	30	75	32
SW- 85S	SW- 85B	60	40	85	43
SW- 90S	SW- 90B	25	21	90	17
SW- 95S	SW- 95B	58	18	95	34
SW-100S	SW-100B	65	35	100	55
SW-120S	SW-120B	60	24	120	50
SW-125S	SW-125B	70	40	125	77
SW-130S	SW-130B	40	25	130	43

SW-N flame-resistant (ABS UL94V-1 : UL94V-0)

Product no. / Dimensions

Product no.	W	H	D	UL class	Weight (g)
SW-N 20G	15	15	20	UL94V-1	3
SW-N 30G	20	18	30	UL94V-1	5
SW-N 40G	30	20	40	UL94V-0	11
SW-N 50C	35	25	50	UL94V-0	17
SW-N 55G	40	20	55	UL94V-0	19
SW-N 65G	45	25	65	UL94V-0	23
SW-N 75G	50	30	75	UL94V-0	35
SW-N 85G	60	40	85	UL94V-0	50
SW-N 95G	58	18	95	UL94V-0	37
SW-N100C	65	35	100	UL94V-0	60
SW-N120G	60	24	120	UL94V-0	56
SW-N125C	70	40	125	UL94V-0	85
SW-N130G	40	25	130	UL94V-0	48

※Cross out products are discontinued.

SW-T heat-resistant (ABS heat distortion temperature 100°C)


Product no. / Dimensions

Product no.	W	H	D	Weight (g)
SW-T 20B	15	15	20	2
SW-T 40B	30	20	40	9
SW-T 55B	40	20	55	16
SW-T 75B	50	30	75	30
SW-T 95B	58	18	95	31
SW-T100B	65	35	100	50



Technical Data

Protection class: IP40
Operating temperature: -10°C ~ +60°C

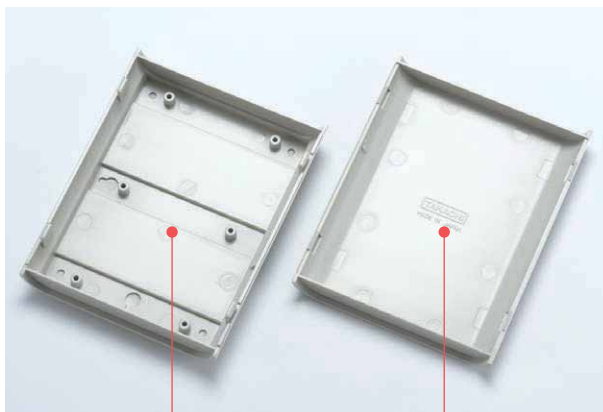

2

1

- Rounded shape design.
- Suitable for wall-mount communication device usage.
- Snap on / off cover. No screws are required.

Components

No.	Part name	Material	Color / Finish
1	Cover	ABS UL94HB	Light gray • White
2	Base	ABS UL94HB	Light gray • White

Accessories (Optional parts)



Tapping standoff TPS series
See page TPS • MT-1




PCB mounting screw EM series
See page EM • MR-1


SU dimensions

■ DXF/DWG/PDF drawings available on our website.

SU-140

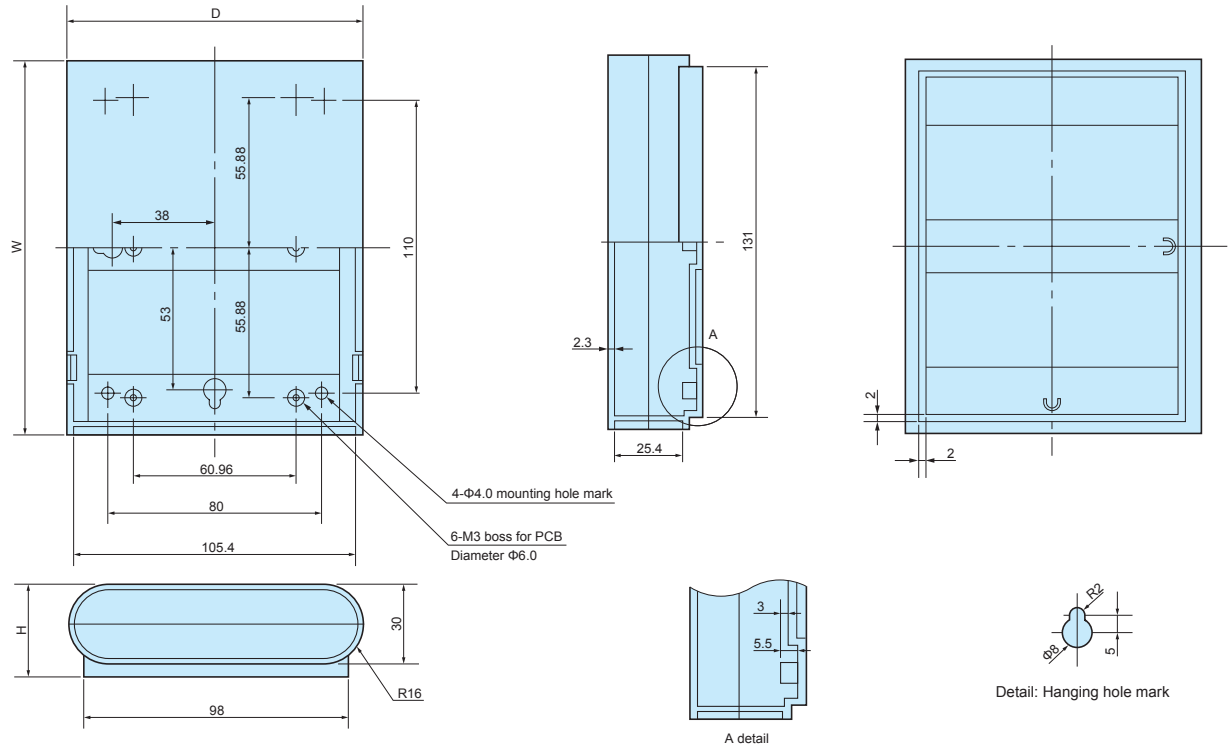

SU-180

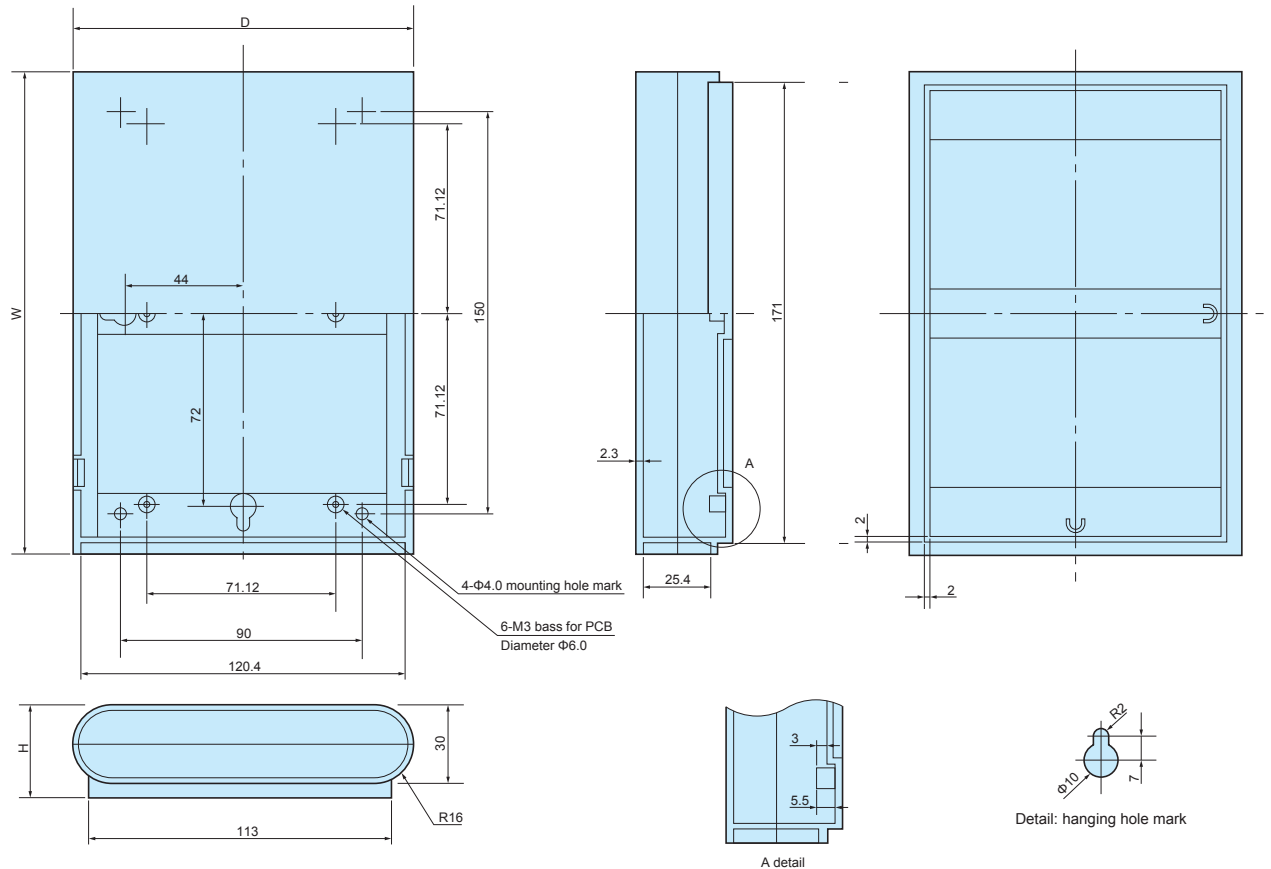

Product no. / Dimensions

Product no.		Dimensions			Weight (g)
● Light gray	● White	W	H	D	
SU-140G	SU-140W	140	35	110	100
SU-180G	SU-180W	180	35	125	140

OP SERIES

OPEN-CLOSING PLASTIC BOX




OP dimensions

■ Drawings below are reference examples only.
DXF/DWG/PDF drawings available on our website.

Technical Data

Operating temperature: -10°C ~ +60°C

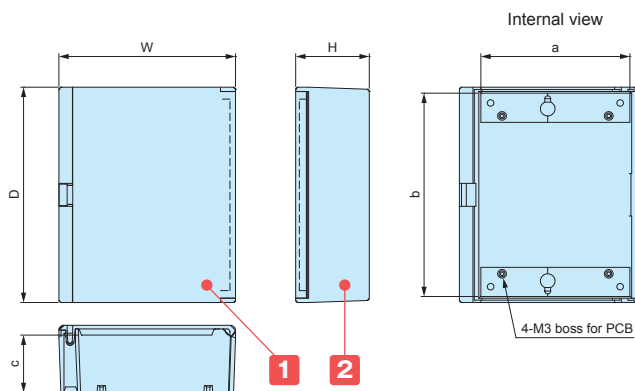

■ Plastic case with hinged door.

■ General purpose case for desk-top, wall-mount, and so on.

Components


No.	Part name	Material	Color / Finish
1	Top cover	ABS UL94HB	Light gray • Black
2	Base	ABS UL94HB	Light gray • Black

Product no. / Dimensions

Product no.		Dimensions						Weight (g)
● Light gray	● Black	W	H	D	a	b	c	
OP-125G	OP-125B	100	45	125	81.2	116.6	35.7	130
OP-150G	OP-150B	120	50	150	101.2	141.6	40.7	185
OP-180G	OP-180B	145	55	180	128.8	174	43	275

Accessories (Optional parts)

OPP mounting plate



Product no. / Dimensions

Product no.	W	D	a	b	Material	Color / Finish	Suitable box
OPP-125	72.5	109	52.5	85	Aluminium A1050P t = 1.5	Unfinished	OP-125
OPP-150	92.5	134	72.5	110	Aluminium A1050P t = 1.5	Unfinished	OP-150
OPP-180	115.5	164	98	140	Aluminium A1050P t = 1.5	Unfinished	OP-180

■ Included screw : M3-6 Steel pan head tapping • Trivalent chromate x 4 pcs

TLW series

TILT LEG



APPLICATION EXAMPLE

- Double shot injection molded feet with soft and well-designed rounded shape.
- Non-slip design with Elastomer (TPE) pad.
- Available in 3 different color patterns (2 color patterns for TLW-70 models).
- TLW-70E models are exclusively for use with width 185mm or larger bottom covers of EXP • EXPE • EXW • EX • EXH • EXHE aluminium enclosures.

Technical Data


Max load : 7kg

Components




No.	Part name	Pcs	Material	Color / Finish
1	Front foot	2	PC + ABS UL94V-0 • TPE	Black & Black • Navy & Gray • Light gray & Gray
2	Rear foot	2	PC + ABS UL94V-0 • TPE	Black & Black • Navy & Gray • Light gray & Gray
-	Screw	4	Steel M3-8 pan head	Black trivalent chromate
-	Nut	4	Steel M3	Black trivalent chromate

TLW dimensions

Mounting hole (Front)





Mounting hole (Rear)



1

2

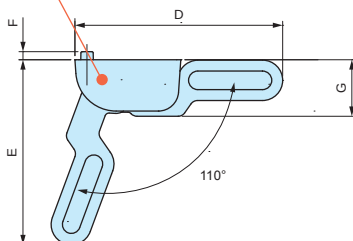


- DXF/DWG/PDF/STP drawings available on our website.

- TLW-70E□□ models are for installation (with M3 nut) into the built-in grooves on bottom-covers of EXP • EXPE 20-6, EXH • EXHE • EX 19-4 or larger models.

- Hole milling is required to install TLW-46□□ and TLW-70□□ models.

- Max installation panel thickness : t = 3.5mm

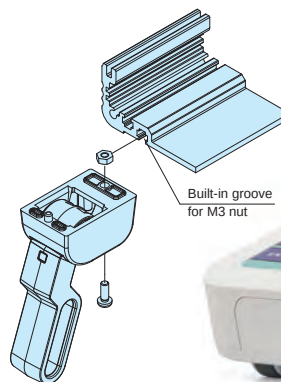

Built-in groove for M3 nut



Product no. / Dimensions


Product no.	A	B	C	D	E	F	G	H	I	J	K	L	Color (plastic)	Color (TPE)	Weight (g)
TLW-46BB	19	19	12	51.2	45.9	2	14	13	19	27	14	2	Black	Black	23
TLW46-NG	19	19	12	51.2	45.9	2	14	13	19	27	14	2	Navy	Gray	23
TLW-46LG	19	19	12	51.2	45.9	2	14	13	19	27	14	2	Light gray	Gray	23
TLW-70EBB	-	25	16	75.4	69	3	21.5	-	25	39	21.5	3	Black	Black	59
TLW-70ENG	-	25	16	75.4	69	3	21.5	-	25	39	21.5	3	Navy	Gray	59
TLW-70ELG	-	25	16	75.4	69	3	21.5	-	25	39	21.5	3	Light gray	Gray	59
TLW-70BB	30	25	16	75.4	69	2	21.5	20	25	39	21.5	2	Black	Black	59
TLW-70LG	30	25	16	75.4	69	2	21.5	20	25	39	21.5	2	Light gray	Gray	59

TI SERIES

TILT STAND



Installation Example

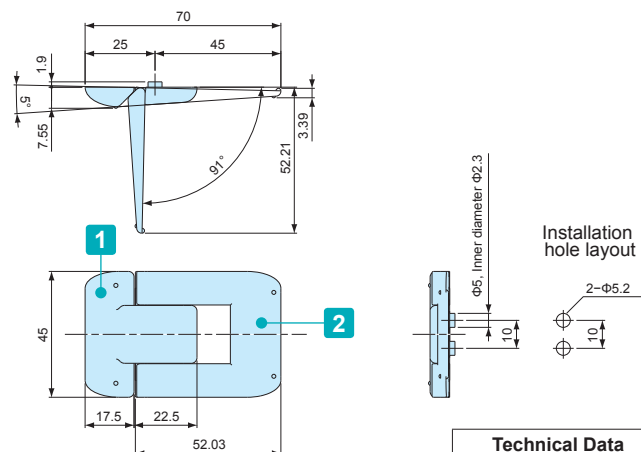

Technical Data

Max load : 3kg

Components

No.	Part name	Pcs	Material	Color / Finish
1	Body	1	ABS UL94HB	Black • Light gray
2	Leg	1	ABS UL94HB	Black • Light gray
—	Screw (M3-6 Pan head tapping)	2	Steel	Trivalent chromate


Product no.

Product no.	
● Black	● Light Gray
TI-70B	TI-70S

WM series

SUSPENSION BRACKET

How to install

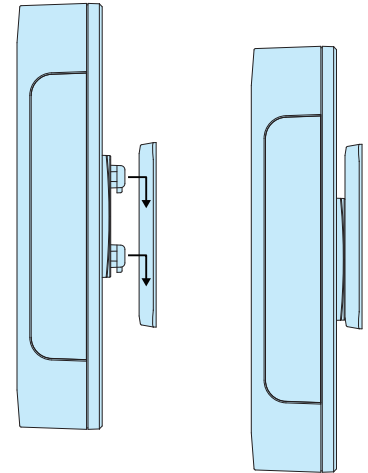

- Plastic wall mounting bracket. Easy attachment and removal.
- Large and small bracket types are available.
- Applicable to be used on plastic or metallic enclosures with a panel thickness of 0.8 ~ 3.5mm.
- To attach the suspension hook onto the enclosure, hole milling is required.
- Please be aware of the insertion direction of the suspension hook against the mounting base when attaching.


Technical Data

Max load : 2 kg - WM-1
5 kg - WM-2


*The max load values listed are static load values only. Use caution when handling.

WM dimensions

WM-1

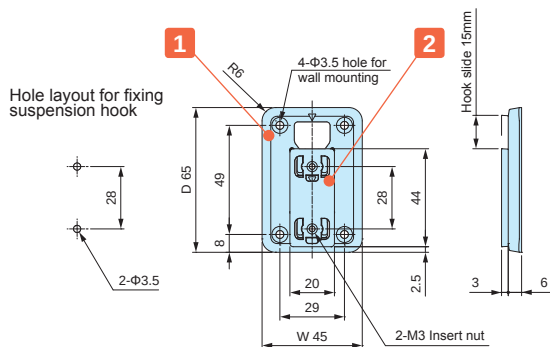

WM-2

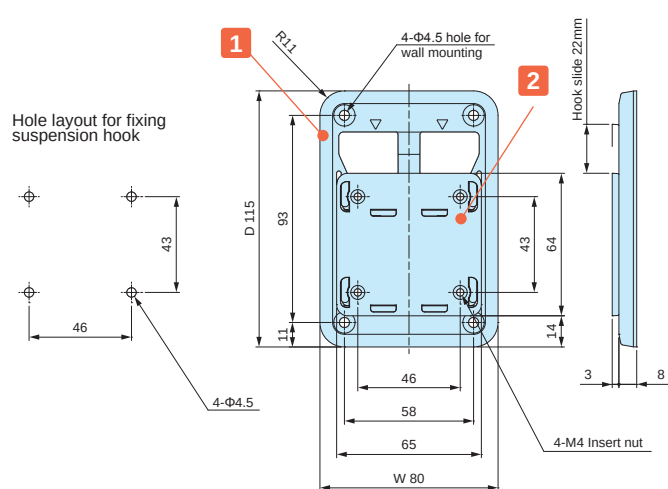

■ DXF/DWG/PDF/STP drawings available on our website.

Components

No.	Part name	Pcs	Material	Color / Finish
1	Mounting base	1	PC + ABS UL94HB	Off-white • Dark gray
2	Suspension hook	1	PC + ABS UL94HB	Off-white • Dark gray
-	Screw	2 (WM-1) 4 (WM-2)	Steel	Nickel plated

Included Screw WM-1□ : Bind M3-8
WM-2□ : Bind M4-8

Product no. / Dimensions

Product no.		W	D	Mountable thickness	Weight (g)
● Off-white	● Dark gray				
WM-1W	WM-1D	45	65	t0.8 ~ t3.5	11.5
WM-2W	WM-2D	80	115	t0.8 ~ t3.5	48

NMG series**NEODYMIUM MAGNET****Round magnet**


■ DXF/DWG/PDF drawings available on our website.



- Material / Finish: Neodymium / Nickel plated
- Please attach using a strong adhesive.

Product no. / Details


Product no.	a	b	Weight (g)	Flux Density	Absorption
NMG3-15N	15	3	4	214.4 mT	2.44 kgf
NMG3-20N	20	3	7.1	170.7 mT	3.26 kgf
NMG5-22N	22	5	11.4	247.2 mT	5.91 kgf
NMG5-25N	25	5	18.4	221.9 mT	6.89 kgf

NMG dimensions**Round magnet with countersunk hole**

- Please fasten with a screw.

**Product no. / Details**



Product no.	a	b	c	Countersunk size	Weight (g)	Flux Density	Absorption
NMG3-15M3	15	3.2	3	M3	3.8	214.3 mT	2.33 kgf
NMG3-20M3	20	3.2	3	M3	6.9	170.6 mT	3.17 kgf
NMG5-22M4	22	4.3	5	M4	13.7	247.2 mT	5.68 kgf
NMG5-25M5	25	5.3	5	M5	17.6	221.9 mT	6.58 kgf

**Rectangular magnet with countersunk holes**

- Please fasten with a screw.

**Product no. / Details**

Product no.	a	b	c	Countersunk size	Weight (g)	Flux Density	Absorption
NMG3-50M3	50	10	3	M3	11.3	210.0 mT	9.1 kgf

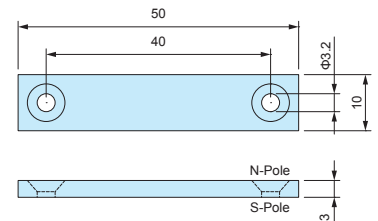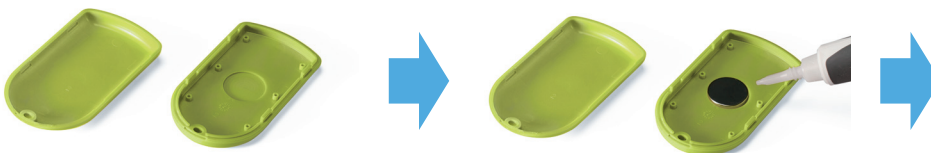
**Example 1** The magnetic force remains strong even through plastic.

Make recessed pocket on the inside wall.

Glue on.



Attach onto a metallic surface.

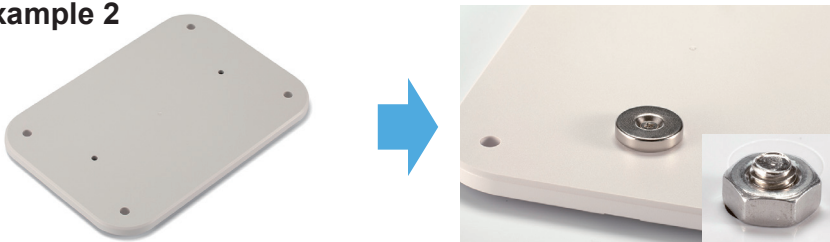Example 2

Make holes

Fasten with a screw and nut.



Attach onto a metallic surface.

CAUTION: Handle with care to avoid personal injury or damage to the magnet.


GDH series

PLASTIC BELT CLIP



GDH dimensions

■ DXF/DWG/PDF drawings available on our website.

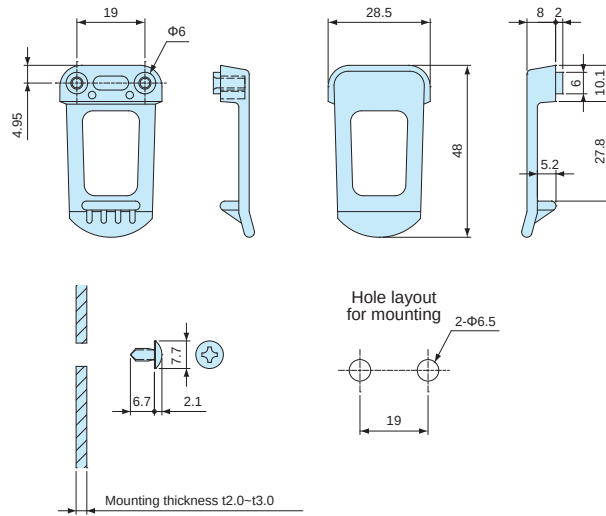

Components

No.	Part name	Pcs	Material	Color / Finish
1	Clip	1	ABS UL94HB	White • Black
2	Screw	2	Steel M3.5-6	Zinc plated

Product no. / Dimensions

Product no.		W	H	D
● White	● Black			
GDH-1W	GDH-1B	28.5	10	48

DK series

STEEL BELT CLIP





DK dimensions

■ DXF/DWG/PDF drawings available on our website.



DK-1

DK-2

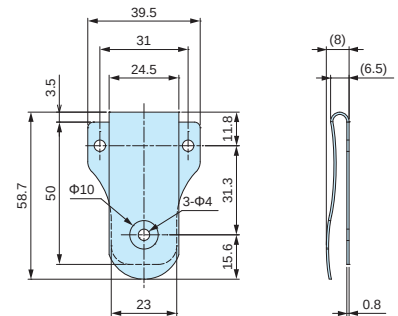
Hole layout
for mountingHole layout
for mounting

Product no. / Dimensions

Product no.	Material	Finish
DK-1	Steel SPCC t=1.0	Chrome plated
DK-2	Steel SPCC t=0.8	Chrome plated

DRA series


DIN-RAIL MOUNTING BASE

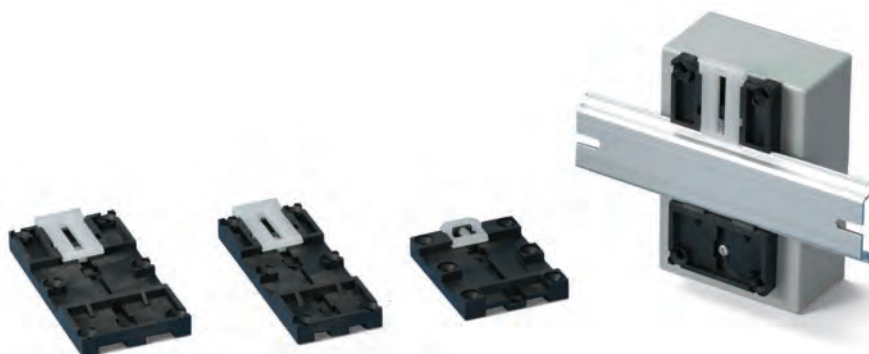

- For installation of enclosures, PCB and other parts onto a DIN rail.
- Simple installation and removal via the pull lever.

■ NOTE

Before installation, please ensure that the lever is not fully hidden behind the enclosure




Technical Data


Max load : 5kg

DRA dimensions


DRA-1

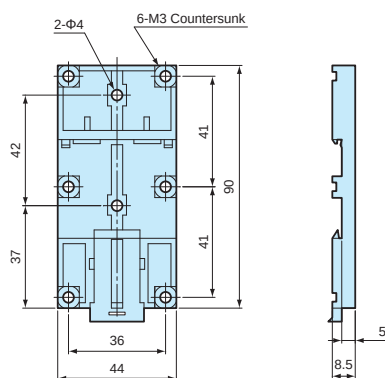

DRA-2

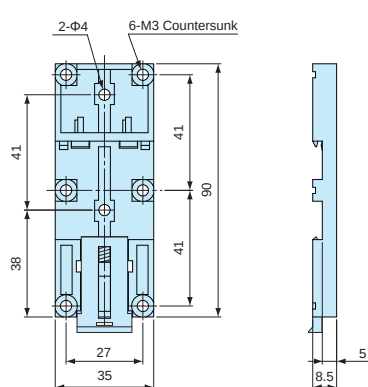

DRA-3

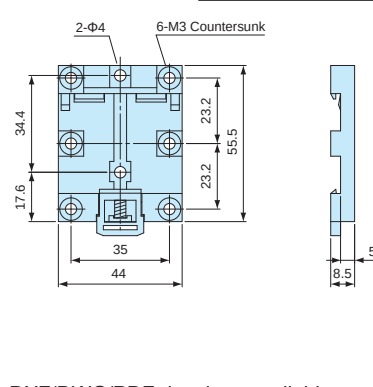

- DXF/DWG/PDF drawings available on our website.

Product no. / Dimensions


Product no.	Material (body)	Material (lever)	Color	Weight (g)
DRA-1	PPE : SB UL94V-1	Nylon 66 UL94V-2	Black : White	16.4
DRA-2	PPE : SB UL94V-1	Nylon 66 UL94V-2	Black : White	14.5
DRA-3	PPE : SB UL94V-1	Nylon 66 UL94V-2	Black : White	10.4

DRT series

DIN-RAIL MOUNTING BASE

DRT dimensions


- DXF/DWG/PDF drawings available on our website.



- For installation of enclosures, PCB and other parts onto a DIN rail.
- Simple installation and removal by tilting the case at an angle and sliding it in/out.

■ NOTE

Before installation, please ensure that the length (from top) of the enclosure is equal to, or less than 100mm from the center of the mounting base.



Technical Data



Max load : 1kg
Operating temperature: -20°C ~ +70°C

Product no. / Dimensions

Product no.	Material	Color	Weight (g)
DRT-1	PC/ABS UL94V-0	Light gray	7.3


DRT series**DIN RAIL MOUNTING BASE****Installation example**

■ DXF/DWG/PDF/STP drawings available on our website.

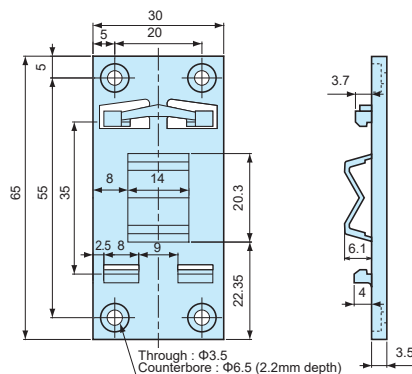

■ NOTE

Before installation, please ensure that the length (from top) of the enclosure is equal to, or less than 100mm from the center of the mounting base.



- For installation of enclosures, PCB and other parts onto a DIN Rail.
- Simple installation and removal by tilting the case at an angle and sliding it in/out.

Technical Data





Max load : 1kg

Product no. / Details

Product no.	Material	Color	Weight (g)	Pack of
DRT-1	PC/ABS UL94V-0	Light gray	7.3	1
DRT-1-P	PC/ABS UL94V-0	Light gray	7.3 (1pc)	50

CKD series**DIN RAIL MOUNTING FEET****Installation example**

■ DXF/DWG/PDF drawings available on our website.

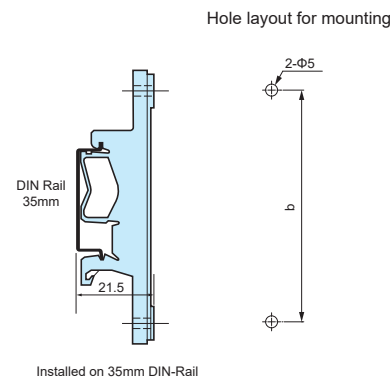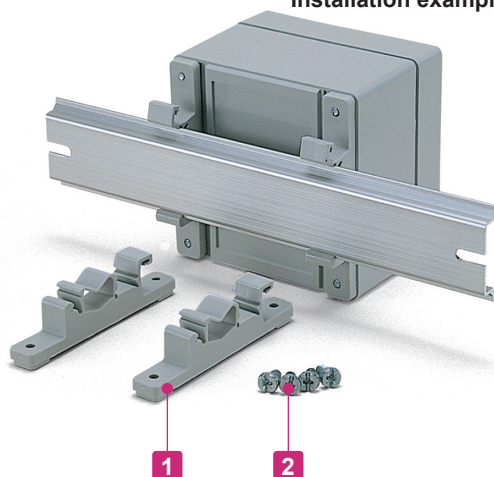

- Mounting feet for installation of enclosures, PCB and other parts onto a DIN Rail. Can be easily detached.

Technical Data

Max load : 3kg / 2pcs

Components



No.	Part name	Pcs	Material	Color / Finish
1	Mounting feet	2	Polyamide	White gray
2	Screw (special type 4.2 x 9.5)	4	Steel	Unichrome plated

Product no. / Details

Product no.	W	a	b	c	d	Weight (g)	Pack of
CKD-120	117	115	106	96	37	21 (2pcs)	2
CKD-160	157	155	147	136	57	24 (2pcs)	2

ULCK series**SCREWLESS PCB ADHESIVE STANDOFF**

Application example

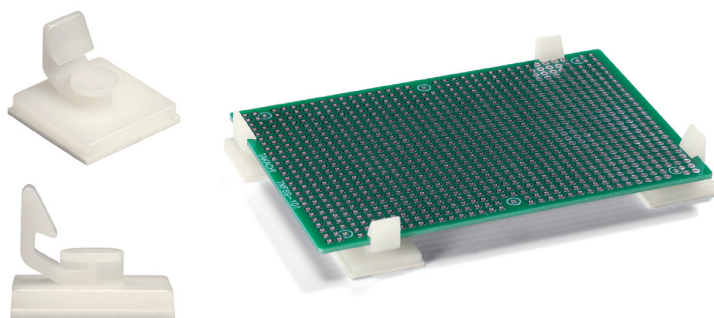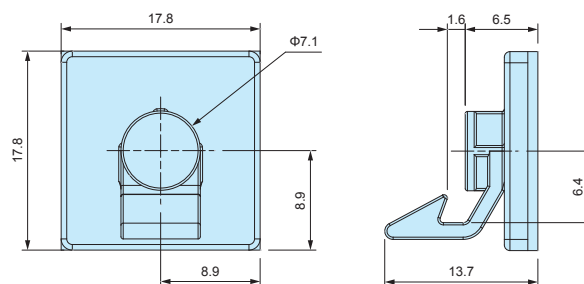**ULCK dimensions**

■ DXF/DWG/PDF drawings available on our website.

- Securing of a 1.6mm thick PCB made easy by simply snapping it in.
- Adhesive standoff can be freely and easily affixed on.
- Once removed, it cannot be adhered on again.

Product no. / Details

■ Material / Color : PA66 UL94V-2 / Natural



Product no.	Weight (g)	Pack of
ULCK-6.4	1.3 (1 pc)	4

CUBE series**CUBE STANDOFF**

■ DXF/DWG/PDF/STP drawings available on our website.

CUBE10-M3

CUBE10-M4

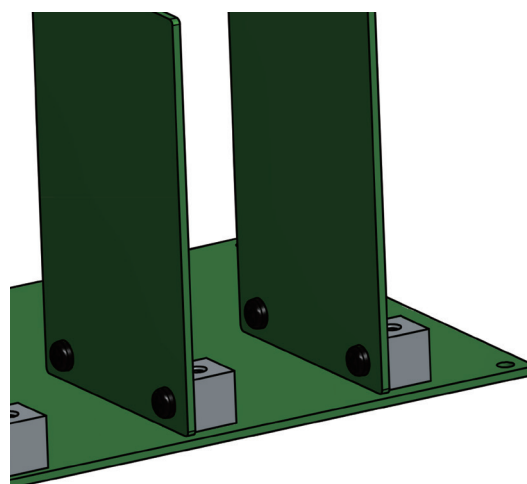


- 10mm threaded cube shape standoff with a thread on 4 faces.
- M3 and M4 thread models available.
- Conveniently usable when installing PCB or metal plate upright.
- CUBE can also be used to make a simple housing by vertically aligning the plates.

Product no. / Details



■ Zinc diecast : Glossy barrel finish

Product no.	Pack of
CUBE10-M3	2
CUBE10-M4	2
CUBE10-M3-P	20
CUBE10-M4-P	20

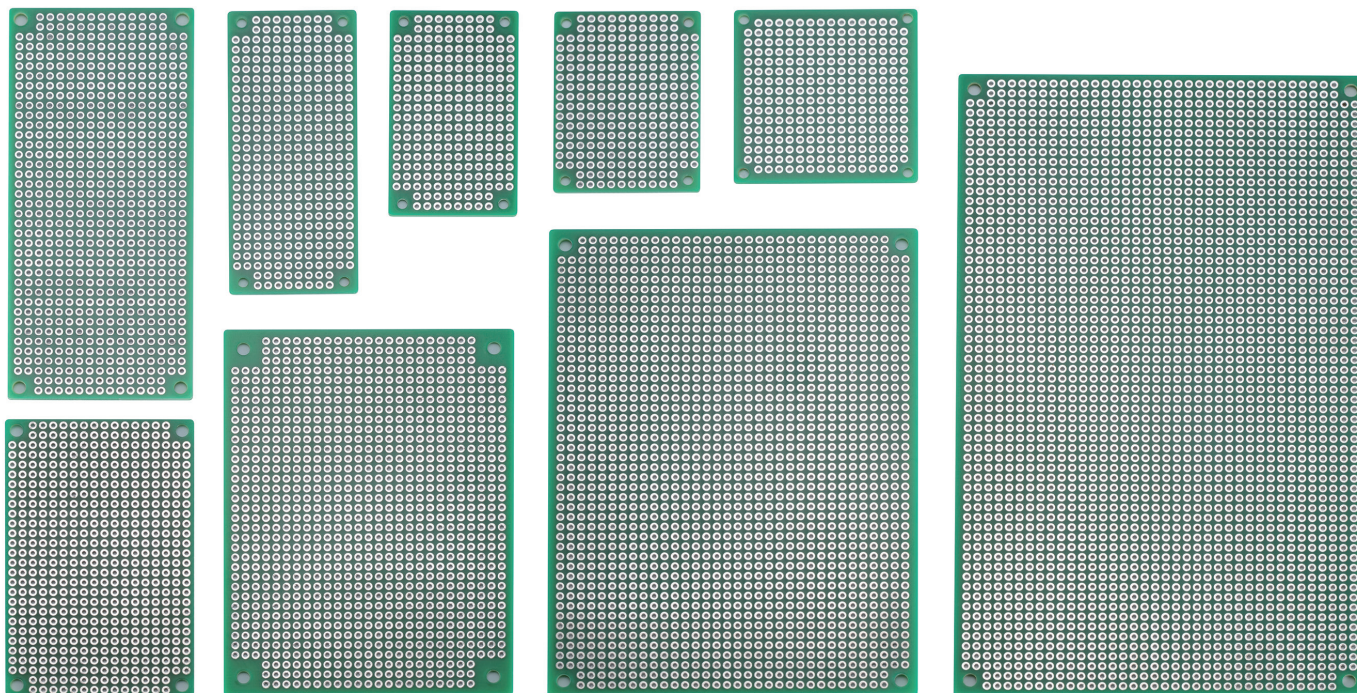

- Plated Through Hole (PTH) type PCB with a 2.54mm hole-to-hole pitch.
Inexpensive and economical PCB made with robust, heat-resistant and non-conductive glass epoxy material.
- Easily mounted onto bosses or standoffs with the mounting holes at each corner.
- Made with environmentally friendly lead-free solder. RoHS3 compliant.
- 4 new sizes added to extend the lineup to a total of 9 sizes. PCB100-160 is Eurocard (3U) format size.
- 3 new SIC and SIM plastic case series compatible sizes have been released, now with 4 compatible sizes available.
- DXF/DWG/PDF drawings available on our website.

Installation Example

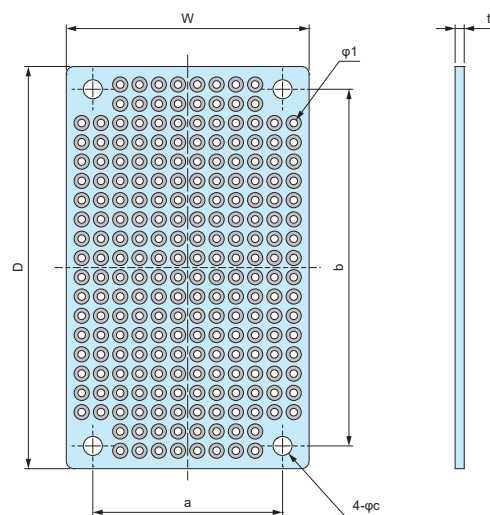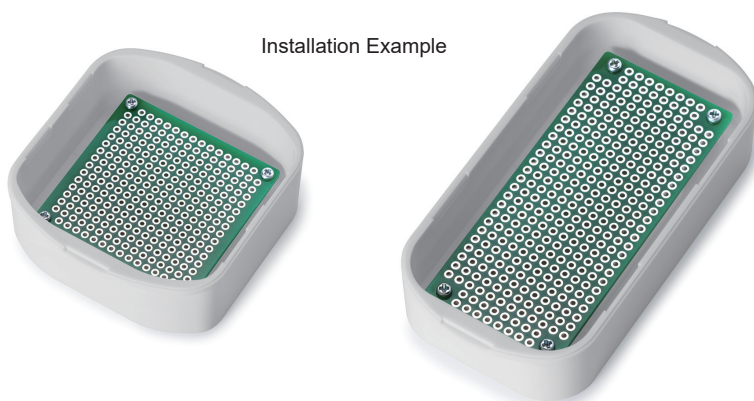

Material / Finish : Glass epoxy (FR-4) / Through-hole - Lead-free solder resist


*When installing PCB46-101 with M2 mounting screws, use EM-B2 (see page 398).

Product no. / Details

Product no.	W	D	a	b	c	t	Mounting screw	Weight (g)	Compatible SIC & SIM size
PCB 32- 53	32	53	25	47	2.5	1.2	M2 / M2.5	3.9	SIC • SIM5- 7-□
NEW PCB 32- 73	32	73	25	67	2.5	1.2	M2 / M2.5	5.2	SIC • SIM5- 9-□
NEW PCB 36- 47	36	47	30	41	2.5	1.2	M2 / M2.5	3.7	—
NEW PCB 45- 45	45	45	40	40	2.5	1.2	M2 / M2.5	4.6	SIC • SIM6- 7-□
NEW PCB 46-101	46	101	40	95	3.2	1.6	M2 / M2.5 / M3	13.2	SIC • SIM6-12-□
PCB 47- 72	47	72	41	66	3.2	1.2	M3	7.4	—
PCB 72- 95	72	95	62	85	3.2	1.2	M3	15.7	—
PCB 90-120	90	120	82	112	3.2	1.6	M3	32.5	—
PCB100-160	100	160	92	152	3.2	1.6	M3	49.2	—

TNF SERIES

LEAD-FREE UNIVERSAL PCB

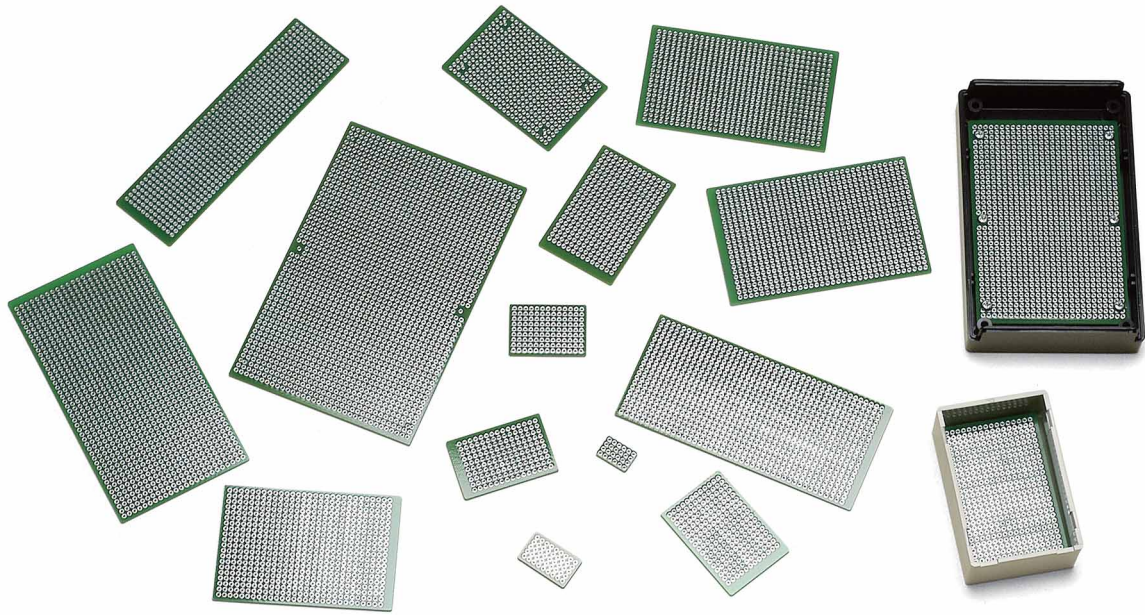

- Material / Finish : Glass epoxy (FR-4) / Through-hole - Lead-free solder resist
- Environmentally friendly lead-free solder.
- 25 different sizes available. See chart on page TNF-2 for suitable cases/boxes.
- TNF160-240 is for multi-size use. Cut it to fit your needs when using.

Accessories (Optional parts)



Tapping standoff TPS series
See page TPS • MT-1








Adhesive standoff T-600, 700 series
See page Standoff-1



Adhesive standoff ASR series
See page Standoff-1



PCB mounting screw EM series
See page EM • MR-1

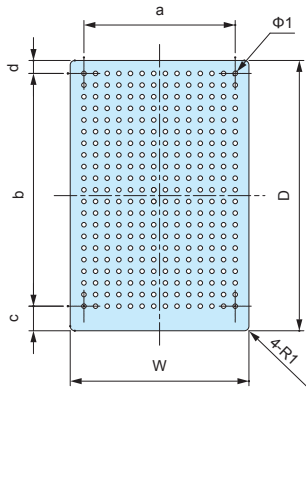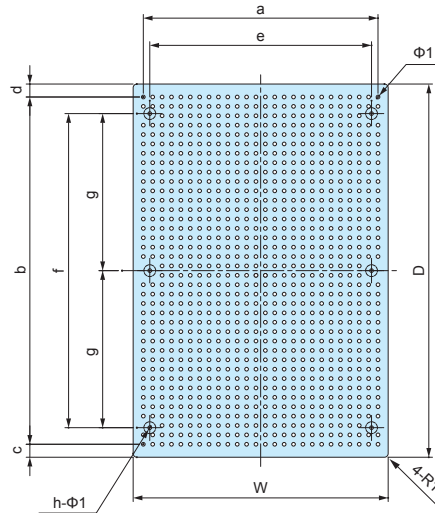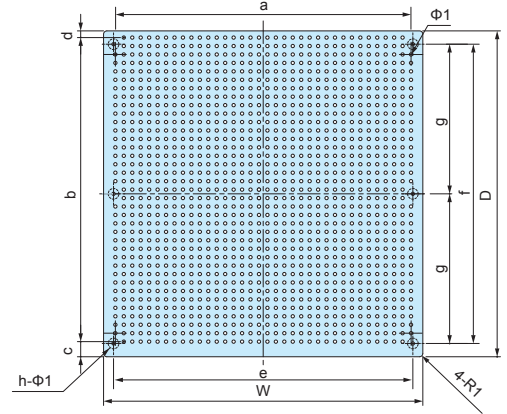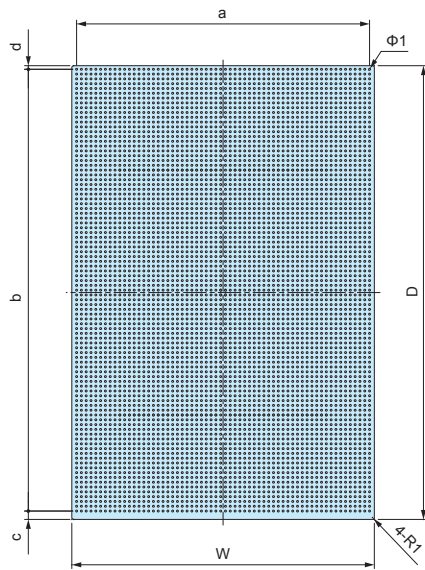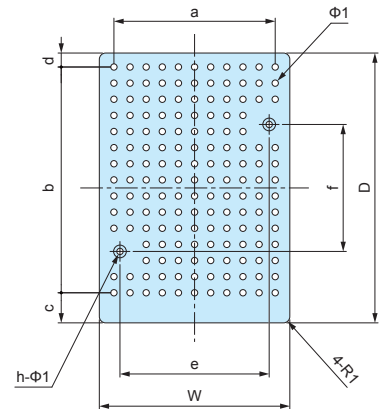Pattern A**Pattern B****Pattern C****Pattern D****Pattern E****Product no. / Dimensions**

■ Pattern B, C, and E PCBs come with holes for boss mounting.

Product no.	W	D	a	b	c	d	e	f	g	h	Holes	Pattern	Suitable case
TNF 11- 16	10.7	15.8	7.62	12.7	1.55	1.55	—	—	—	—	4 x 6	A	SW-20
TNF 15- 25	15	25	10.16	20.32	2.34	2.34	—	—	—	—	5 x 9	A	SW-30
TNF 25- 35	25	35	20.32	30.48	2.26	2.26	—	—	—	—	9 x 13	A	SW-40
TNF 29- 32	29.5	32.5	25.4	25.4	4.82	2.28	23.5	20	—	2	11 x 11 ■	E	TW • TWN4-2-5
TNF 29- 42	29.5	42.5	25.4	35.56	4.74	2.2	23.5	20	—	2	11 x 15 ■	E	TW • TWN4-2-6
TNF 29- 44	29	44	22.86	35.56	5.49	2.95	—	—	—	—	10 x 15	A	SW-50 • 53
TNF 34- 49	34	49	27.94	40.64	5.45	2.91	—	—	—	—	12 x 17	A	SW-55
TNF 34- 62	34.5	62.5	30.48	55.88	4.58	2.04	28.5	40	—	2	13 x 23 ■	E	TW • TWN4-2-8
TNF 34-124	34	124	27.94	116.84	4.85	2.31	—	—	—	—	12 x 47	A	SW-130
TNF 39- 59	39	59	33.02	50.8	5.37	2.83	—	—	—	—	14 x 21	A	
TNF 39- 70	39.5	70	33.02	60.96	5.79	3.25	27.94	58.42	—	4	14 x 25	A	TW • TWN5-3-9
TNF 43- 66	43	66	38.1	58.42	3.79	3.79	30	50	—	4	16 x 24 ■	B	
TNF 43- 79	43.5	79.5	38.1	73.66	2.92	2.92	—	—	—	—	16 x 30	A	TW5-3-10
TNF 44- 69	44	69	38.1	60.96	5.29	2.75	—	—	—	—	16 x 25	A	SW-75
TNF 52- 89	52	89	45.72	81.28	3.86	3.86	—	—	—	—	19 x 33	A	SW-95
TNF 53- 79	53	79	48.26	71.12	5.21	2.67	—	—	—	—	20 x 29	A	SW-85 • TW • TWN7-□-11
TNF 53-114	53	114	48.26	106.68	4.93	2.39	—	—	—	—	20 x 43	A	SW-120
TNF 59- 94	59	94	53.34	86.36	5.09	2.55	—	—	—	—	22 x 35	A	SW-100
TNF 63-119	63	119	58.42	111.76	4.89	2.35	—	—	—	—	24 x 45	A	SW-125
TNF 69-101	69	101	63.5	93.98	3.51	3.51	60	—	42.5	6	26 x 38 ■	B	
TNF 89-136	89	136	83.82	129.54	3.23	3.23	80	—	60	6	34 x 52 ■	B	
TNF 96- 98	96	98	88.9	91.44	4.55	2.01	90	90	45	6	36 x 37 ■	C	
TNF122- 99	122	99	116.84	91.44	3.78	3.78	—	—	—	—	47 x 37	A	
TNF128-136	136	128	129.54	121.92	4.31	1.77	130	120	60	6	52 x 50 ■	C	
TNF160-240	160	240	154.94	233.68	3.93	2.39	—	—	—	—	62 x 93	D	


AST series**INSERT NUT ADHESIVE STANDOFF**

- Double-sided adhesive tape allows the standoff to be mounted quickly and easily; allows PCB mounting in non-boss enclosures.
- Convenient for installing PCBs into enclosures without the need for customization.
- Please ensure that surface is cleaned and grease-free before adhering.
- Once removed, it cannot be adhered on again.


AST dimensions

■ DXF/DWG/PDF/STP drawings available on our website.


AST2.5-□

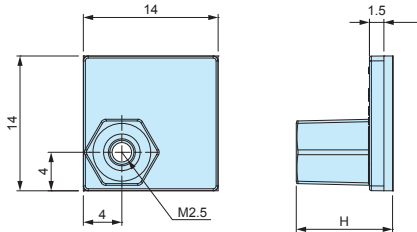

AST3-□





AST4-□

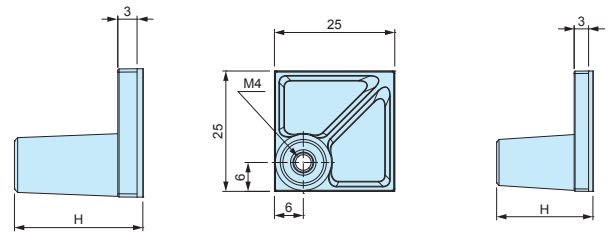**Product no. / Details****Bulk package**

Product no	H dimension	Included screw	Recommended PCB thickness (mm)	Recommended torque (N · m)	Weight (g)	Pack of	Product no	Pack of
AST2.5-5B	5	M2.5-5 pan head	1.0 ~ 2.0	0.3	0.6 (1 piece)	4	AST2.5-5B-P	100
AST2.5-10B	10	M2.5-5 pan head	1.0 ~ 2.0	0.3	0.8 (1 piece)	4	AST2.5-10B-P	100
AST3-6B	6	M3-6 pan head	1.0 ~ 3.0	0.4	1.5 (1 piece)	4	AST3-6B-P	100
AST3-10B	10	M3-6 pan head	1.0 ~ 3.0	0.4	1.6 (1 piece)	4	AST3-10B-P	100
AST3-15B	15	M3-6 pan head	1.0 ~ 3.0	0.4	1.8 (1 piece)	4	AST3-15B-P	100
AST3-20B	20	M3-6 pan head	1.0 ~ 3.0	0.4	2.1 (1 piece)	4	AST3-20B-P	100
AST4-10.5B	10.5	M4-8 pan head	1.0 ~ 3.5	0.8	2.6 (1 piece)	4	AST4-10.5B-P	50
AST4-20B	20	M4-8 pan head	1.0 ~ 3.5	0.8	3.2 (1 piece)	4	AST4-20B-P	50

- Base material / color : Nylon 66 (UL94V-2) / Black
- Nut • screw material / finish : Steel / Trivalent chromate

- Bulk packaging is available. See "Bulk package" column above.
- Screws are not included for bulk packages.

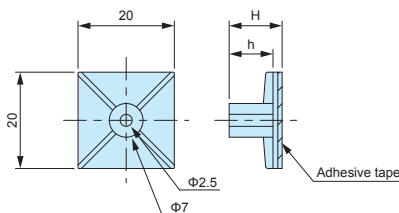ASR series**ADHESIVE PCB STANDOFF****ASR dimensions**

■ DXF/DWG/PDF drawings available on our website.

Technical Data

Recommended torque : 0.4N · m

- M3 tapping screw use adhesive standoff.
Recommended to be used with EM-3 or EM-3-6 self-tapping screws (See page 398).
- Please ensure that surface is cleaned and grease-free before adhering.
- Once removed, it cannot be adhered on again.


Product no. / Details

■ Material / Color: Nylon 66 (UL94V-2) / Natural

Product no	H	h	Weight (g)	Pack of
ASR- 5	5.1	3.1	0.9 (1 piece)	10
ASR- 6	6.4	4.4	1.0 (1 piece)	10
ASR- 7	7.2	5.1	0.9 (1 piece)	10
ASR- 8	8.1	6.3	0.9 (1 piece)	10
ASR- 9	9	7	1.0 (1 piece)	10
ASR-11	11	9	1.0 (1 piece)	10
ASR-13	12.7	10.7	1.2 (1 piece)	10
ASR-14.5	14.7	12.8	1.1 (1 piece)	10
ASR-16	15.9	13.9	1.3 (1 piece)	10
ASR-19	19.1	17.1	1.4 (1 piece)	10

TPS series

TAPPING STANDOFF

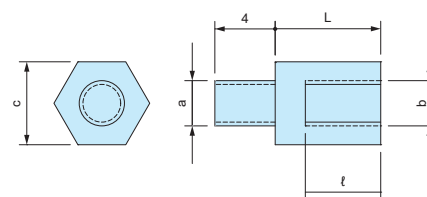

■ Tapping screw head allows for easy installation onto existing enclosure boss mount.

■ DXF/DWG/PDF drawings available on our website.

■ 4 different sizes available : M2.3, M2.6, M3 and M4 size.

Product no. / Details


■ Material / Finish : Brass / Unfinished

Product no.	Screw size (a)	Screw size (b)	c	L	ℓ	Weight (g)	Pack of	Suitable models
TPS-M2.3-4	2.3	M2.3	5	4	3	0.7	4	WH series • PFE series LC • LCE • LCS • LCT series PF • PFF series (M2.3 boss models) TW • TWN • TWF series (M2.3 boss models) WP series (M2.3 boss models)
TPS-M2.3-5	2.3	M2.3	5	5	3	0.9	4	
TPS-M2.3-6	2.3	M2.3	5	6	4	1	4	
TPS-M2.3-7	2.3	M2.3	5	7	5	1.2	4	
TPS-M2.3-8	2.3	M2.3	5	8	6	1.3	4	
TPS-M2.3-10	2.3	M2.3	5	10	6	1.7	4	
TPS-M2.3-12	2.3	M2.3	5	12	6	2	4	PF • PFF series (M2.6 boss models) WP series (M2.6 boss models)
TPS-M2.6-4	2.6	M2.6	5	4	3	0.7	4	
TPS-M2.6-5	2.6	M2.6	5	5	3	0.8	4	
TPS-M2.6-7	2.6	M2.6	5	7	5	1.1	4	
TPS-M2.6-10	2.6	M2.6	5	10	6	1.6	4	SU • OP TWS • TW • TWN • TWF series (M3 boss models)
TPS-M2.6-12	2.6	M2.6	5	12	6	2	4	
TPS-M3-4	3	M3	5.5	4	3	0.8	4	
TPS-M3-5	3	M3	5.5	5	3	1.1	4	
TPS-M3-6	3	M3	5.5	6	4	1.2	4	
TPS-M3-7	3	M3	5.5	7	5	1.3	4	
TPS-M3-8	3	M3	5.5	8	5	1.6	4	BCAS • BCAP • BCPC • BCPK series (M4 boss models) BCAR • BCPR series (M4 boss models) SPCP • SPCM • WG • WGV • WGPC
TPS-M3-10	3	M3	5.5	10	6	1.9	4	
TPS-M3-12	3	M3	5.5	12	6	2.3	4	
TPS-M4-6	4	M4	7	6	4	2	4	
TPS-M4-10	4	M4	7	10	6	3.1	4	
TPS-M4-15	4	M4	7	15	8	4.7	4	
TPS-M4-20	4	M4	7	20	10	6.5	4	



■ Please use a suitable sized socket driver to both secure and loosen the tapping standoff.

Installation example



MT series

PCB MOUNTING SCREWS for TPS




■ Pan head PCB mounting Screws for TPS tapping standoffs.

Product no. / Details


Product no.	M	L	Material	Finish	Pack of
MT2.3-4	2.3	4	Steel	Trivalent chromate	20
MT2.3-6	2.3	6	Steel	Trivalent chromate	20
MT2.6-4	2.6	4	Steel	Trivalent chromate	20
NEW MT2.6-6	2.6	6	Steel	Trivalent chromate	20
MT3-4	3	4	Steel	Trivalent chromate	20
NEW MT3-6	3	6	Steel	Trivalent chromate	20
NEW MT4-4	4	4	Steel	Trivalent chromate	20
NEW MT4-6	4	6	Steel	Trivalent chromate	20

EM series**PCB MOUNTING SCREW**

Pan head



Bind head



- Self-tapping screws for mounting PCB on bosses or standoffs.
- EM-3-6 self-tapping screws are suitable for mounting 1.6mm or thicker PCB.


Product no. / Details

■ Material / Finish : Steel / Trivalent chromate


Product no.	M	L	Head type	Suitable models	Pack of
EM-1.6	1.6	4	Pan	SMW • CSS • CS SIC • SIM • WC • PS (M1.6 boss models)	50
EM-2	2	5	Pan	PS • TW • TWN • TWF SIC • SIM • PF • WC • WP (M2 boss models)	50
NEW EM-B2	2	5	Bind	SIC • SIM (M2 boss models) SIC • SIM6-12-□ (when installing PCB46-101)	50
EM-2.3	2.3	6	Pan	DRC • WH • LC • LCT • LCS • LCE • PFE WSC (Top cover bosses) PF • PFF (M2.3 boss models) TW • TWN • TWF (M2.3 boss models) WP (M2.3 boss models)	50
EM-2.3-8	2.3	8	Pan	WSC (Bottom base bosses)	50
EM-2.6	2.6	6	Pan	PF • PFF • WP (M2.6 boss models)	50
EM-3	3	5	Pan	SU • OP	50
EM-3-6	3	6	Pan	TWS • TW • TWN • TWF (M3 boss models)	50

MR series**TORX SCREW**

Flat head




Pan head



With pin



★ Without pin



- Self-tapping torx screws for securing of the enclosure.

★ : MR1.6-6S, MR2.6-10□, MR3-5Z□ and MR3-14□ are without pin.

Product no. / Details

★ Mark = Without pin


Product no.	M	L	Head no.	Head style	Material	Finish	Suitable models	Pack of
MR1.6-6S★	1.6	6	T3	Pan	Steel	Nickel plated	CSS • CS	20
MR2.5-8PS	2.5	8	T8	Pan	Steel	Nickel plated	PF • PFE • PFF (M2.5 size)	20
MR2.6-10S★	2.6	10	T8	Flat	Steel	Nickel plated	TW • TWN (M2.6 size)	20
MR2.6-10B★	2.6	10	T8	Flat	Steel	Black trivalent chromate	TWF (M2.6 size)	20
MR2.6-12PS	2.6	12	T8	Pan	Steel	Nickel plated	MX • MXA • MXB • MXF (M2.6 size)	20
MR2.6-14PS	2.6	14	T8	Pan	Steel	Nickel plated	LCT • LCS • LC115-F2 / F3 LCT • LCS • LC145S-F6	20
MR2.6-14S	2.6	14	T8	Flat	Steel	Nickel plated	LCT • LCS • LC115H-F2 / F3 / M2 / 9V LCT • LCS • LC135-F4 / M2 / M3 / 9V LCT • LCS • LC135H-F4 / M2 / M3 / 9V LCT • LCS • LC145-F6 / M2 / M4 LCT • LCS • LC145H-F6 / M2 / M4 LCT • LCS • LC165-M4 LCT • LCS • LC165H-M4	20
MR2.6-18S	2.6	18	T8	Flat	Steel	Nickel plated	LCT • LCS • LC115-N / F2 / F3 LCT • LCS • LC145S-F6 / 145S-N LCE115-N TW • TWN7-2-11 / 7-4-11 / 7-5-11 TWF7-2-11 / 7-4-11 / 7-5-11 / 8-2-8 / 8-4-8	20
MR-1S	3	5	T10	Flat	Steel	Nickel plated	LCT • LCS • LC115H-N / F2 / F3 / M2 / 9V LCT • LCS • LC135-N / F4 / M2 / M3 / 9V LCT • LCS • LC135H-N / F4 / M2 / M3 / 9V LCT • LCS • LC145-N / F6 / M2 / M4 LCT • LCS • LC145H-N / F6 / M2 / M4 LCT • LCS • LC165-N / M4 LCT • LCS • LC165H-N / M4 LCE115H-N • LCE135-N • LCE145H-N • LCE165H-N	20
MR-1B	3	5	T10	Flat	Steel	Black trivalent chromate	UC	20
MR3-5ZS★	3	5	T10	Slotted raised countersunk	Steel	Nickel plated	FC • HY • HYR • HYRH (M3 size)	20
MR3-5ZB★	3	5	T10	Flat	Steel	Black trivalent chromate	CF	20
MR3-8PS	3	8	T10	Pan	Steel	Nickel plated	PF • PFE • PFF (M3 size)	20
MR3-14S★	3	14	T10	Flat	Steel	Nickel plated	TW • TWN (M3 size)	20
MR3-14B★	3	14	T10	Flat	Steel	Black trivalent chromate	TWF (M3 size) MX • MXA • MXB • MXF (M3 size)	20



Technical Data

Operating temperature: -10°C ~ +60°C

Mount Example

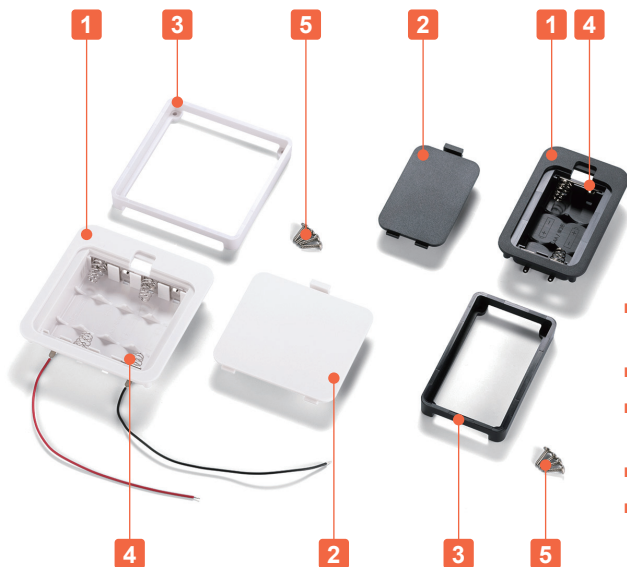


- Suitable to be installed into enclosures with material thickness of 1.0mm to 3.5mm.
- Cover can be opened/closed without any tool for easy battery replacement.
- 5 different battery layouts are available as AA x 2, AA x 3, AA x 4, AAA x 2 and AAA x 4. Each layout comes in 2 models: with lead-wire, and without lead-wire.
- ⊕⊖ markings prevents incorrect placement of battery.
- The dimensions of alkaline or manganese batteries may vary depending on country and brand. Use optional battery cushion sponge to prevent rattling.

Components

No.	Part name	Pcs	Material	Color / Finish
1	Box	1	ABS UL94V-0	Black • Off-white
2	Cover	1	ABS UL94V-0	Black • Off-white
3	Frame	1	ABS UL94V-0	Black • Off-white
4	Battery contact Lead wire (BC-L models)	1 set	Battery contact : Brass & steel wire Lead wire : PVC + Copper wire (UL1007 AWG26)	Nickel plated Black • Red
5	Self-tapping screw	4	Steel	Nickel plated

BC dimensions

- DXF/DWG/PDF/STP drawings available on our website.
- The shape and position of battery contacts vary by model.

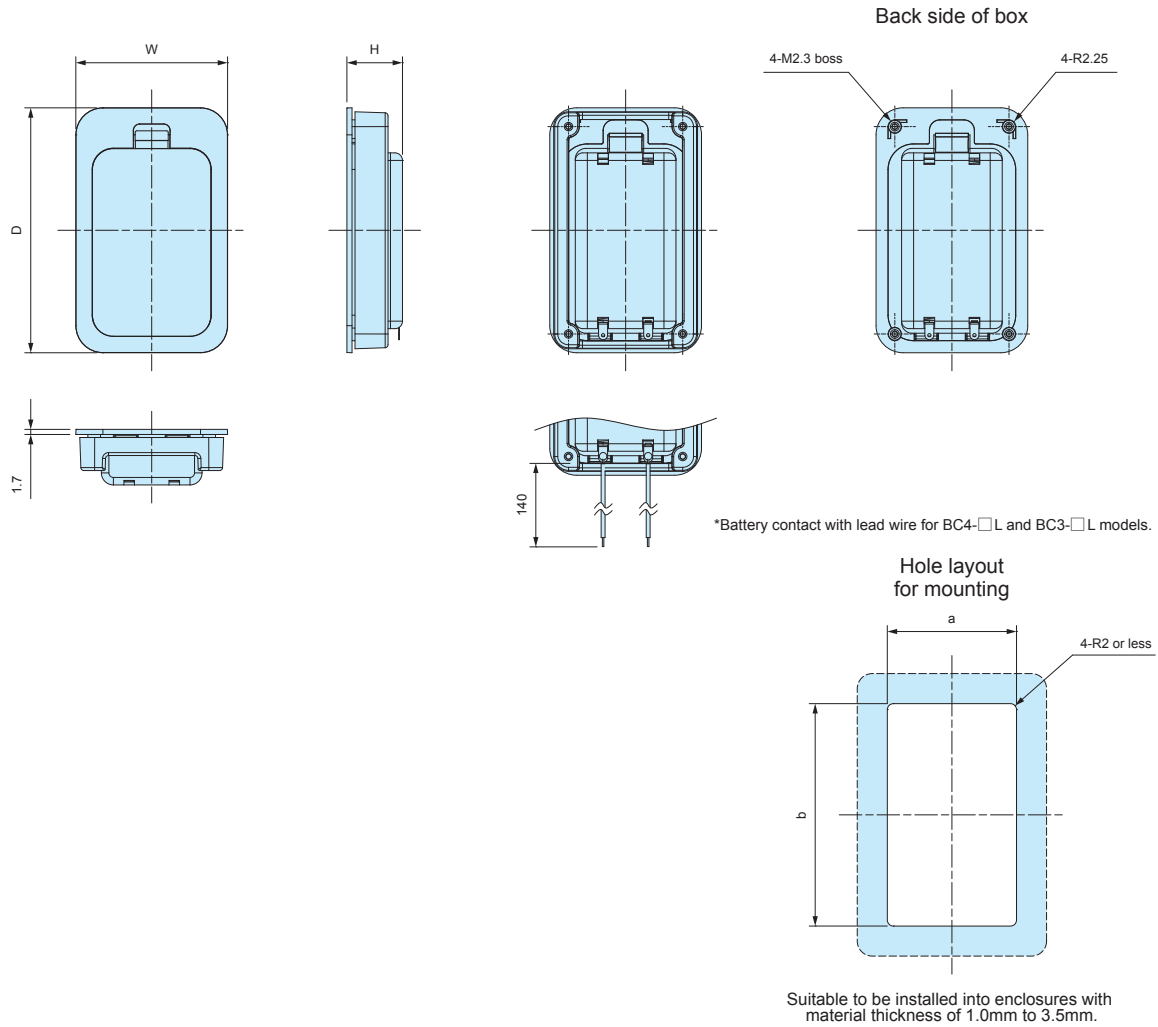

Type: Without Lead Wire

Product no. / Details

Product no.		Dimensions					Battery layout	Weight (g)
● Black	● Off-white	W	H	D	a	b		
BC4-2-B	BC4-2-W	40	14.8	78.5	32.5	71	*AAA x 2	24.5
BC4-4-B	BC4-4-W	62	14.8	78.5	54.5	71	*AAA x 4	34.5
BC3-2-B	BC3-2-W	50.5	18.5	81.5	43	74	*AA x 2	31.5
BC3-3-B	BC3-3-W	65.5	18.5	81.5	58	74	*AA x 3	39
BC3-4-B	BC3-4-W	80.5	18.5	81.5	73	74	*AA x 4	46

*Alkaline or manganese batteries

Type: With Lead Wire


Product no. / Details

Product no.		Dimensions					Battery layout	Weight (g)
● Black	● Off-white	W	H	D	a	b		
BC4-2L-B	BC4-2L-W	40	14.8	78.5	32.5	71	*AAA x 2	25.5
BC4-4L-B	BC4-4L-W	62	14.8	78.5	54.5	71	*AAA x 4	35.5
BC3-2L-B	BC3-2L-W	50.5	18.5	81.5	43	74	*AA x 2	32.5
BC3-3L-B	BC3-3L-W	65.5	18.5	81.5	58	74	*AA x 3	40
BC3-4L-B	BC3-4L-W	80.5	18.5	81.5	73	74	*AA x 4	47


*Alkaline or manganese batteries

How to mount on the enclosures

- Insert battery box into the milled hole first, and fit the frame on the back side. Once mounted, secure the frame with screws.

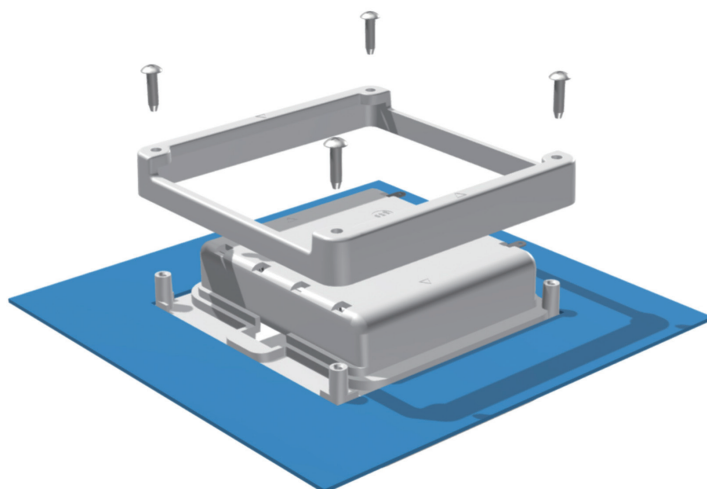


- For BC3-4□ models, ▷ markings are shown on the frame. Install by matching the markings.

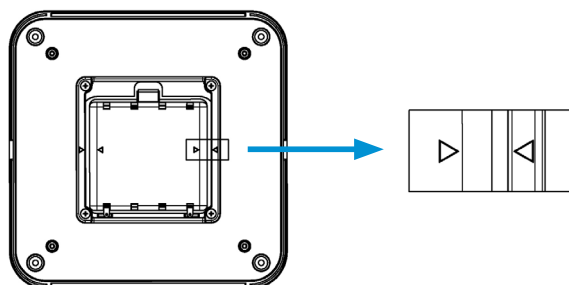


Parallel circuit conversion on BC series battery box

- BC-3□ models can be converted from a series to a parallel circuit. See below illustration for further details.
- IT series (IT-3 models) optional battery contacts can be used for parallel circuit conversion. (See website for more information)
- Use caution when installing or replacing the terminals to avoid the damage to the material.
- Parallel series conversion is available via our customization services.


Conversion Example

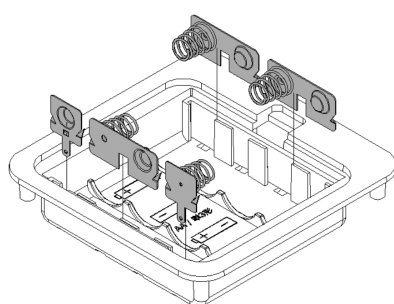

Series Circuit (Standard)

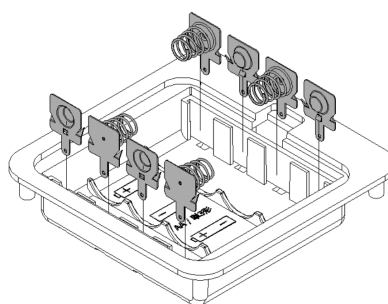


Parallel Circuit (4 batteries)

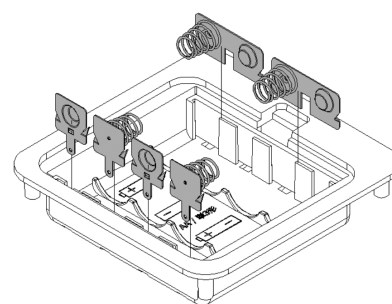

Parallel Circuit (2 batteries x 2)

Customization Available

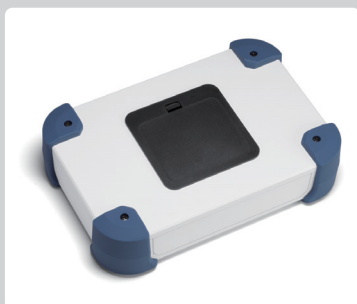

For more information, contact us here:

Online form: https://www.takachi-enclosure.com/contact/form_contact
E-mail : sales@takachi-el.co.jp

Mount Example




■ BC series battery boxes can also be mounted on aluminium enclosures.

CJCV series


USB DUST COVER FLAP




- USB TYPE-A connector dust cover plug with stopper cord.
- Hole milling is required for flap installation.

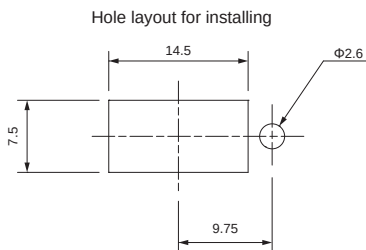

How to Install

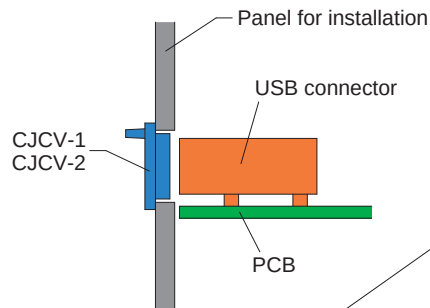

Incorrect Position



- The USB connector should be mounted such that it does not protrude out from the panel's inner side.

Product no. / Feature

■ DXF/DWG/PDF drawings available on our website.

Product no.	Material	Color	Panel thickness	Pack of
CJCVC-1	TPU	Black	0.5 ~ 2.0mm	10
CJCVC-2	TPU	Black	2.0 ~ 12.0mm	10

USBC series

USB DUSTPROOF BLIND PLUG



USB TYPE-A

USBC-2 (Pull-tab type)



USBC-8 (No pull-tab type)



- Easy insertion plug for USB type-A connector.


Product no. / Feature

■ DXF/DWG/PDF drawings available on our website.

Product no.	Material	Color	Pack of
USBC-2	ABS UL94HB	Black	10
USBC-8	PA66 UL94V-2	Black	10

USB TYPE-B

USBC-1 (Pull-tab type)



USBC-3 (No pull-tab type)



Product no. / Feature

■ DXF/DWG/PDF drawings available on our website.

Product no.	Material	Color	Pack of
USBC-1	ABS UL94HB	Black	10
USBC-3	PP UL94HB	Black	10

USB TYPE-C

USB Type-C connector



Product no. / Feature

■ DXF/DWG/PDF drawings available on our website.

Product no.	Material	Color	Pack of
NEW USBC-3C	PE	Black	10

USB 3.0 Micro B

USB 3.0 Micro B connector


**Accessories (Optional parts)****Product no. / Feature**

■ DXF/DWG/PDF drawings available on our website.

Product no.	Material	Color	Pack of
NEW USBC-21	TPE	Black	10

MICRO USB

USBC-31

**MINI USB**

USBC-10

**Product no. / Feature**

■ DXF/DWG/PDF drawings available on our website.

Product no.	Material	Color	Pack of
USBC-31	PE	Black	10
USBC-10	TPE	Black	10

KPS•USB3C series**USB DUSTPROOF CONNECTOR COVER****USB TYPE-A****Product no. / Feature**

Product no.	Material	Color	Pack of
KPS-6	PE	Natural	10

USB TYPE-C**Product no. / Feature**

Product no.	Material	Color	Pack of
NEW USB3C-3	PE	Natural	10

MICRO USB**Product no. / Feature**

Product no.	Material	Color	Pack of
KPS-21	PE	Natural	10


■ DXF/DWG/PDF drawings available on our website.

DTC series

D-SUB•DVI DUSTPROOF CONNECTOR COVER



DTC dimensions

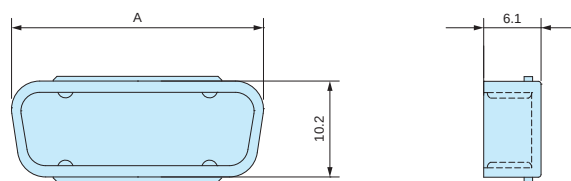


■ DXF/DWG/PDF drawings available on our website.

Product no. / Dimensions / Feature


Product no.	Matching connector	A	Material	Color	Pack of
DTC- 9F	D-sub 9 pin	18.5	PP UL94HB	Gray	10
DTC-15F	D-sub 15 pin • DVI	26.8	PP UL94HB	Gray	10
DTC-25F	D-sub 25 pin	40.6	PP UL94HB	Gray	10

PLC-3TV

POWER INLET DUSTPROOF BLIND PLUG

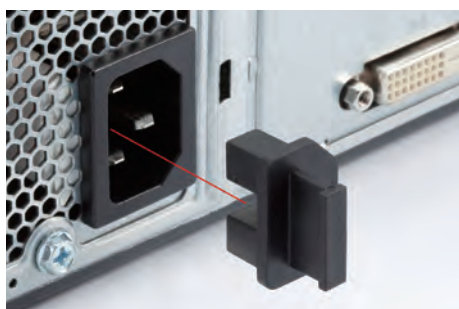

PLC-3TV dimensions

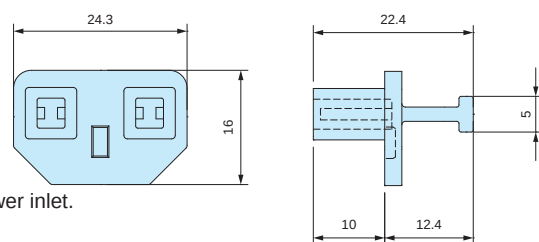

■ Pull-tab type blind plug for power inlet.

Product no. / Feature

■ DXF/DWG/PDF drawings available on our website.


Product no.	Material	Color	Pack of
PLC-3TV	TPE UL94V-0	Black	5

PJR-45 • PJS-45

RJ45 DUSTPROOF BLIND PLUG

PJR-45 (Pull-tab type)

PJS-45 (No pull-tab type)

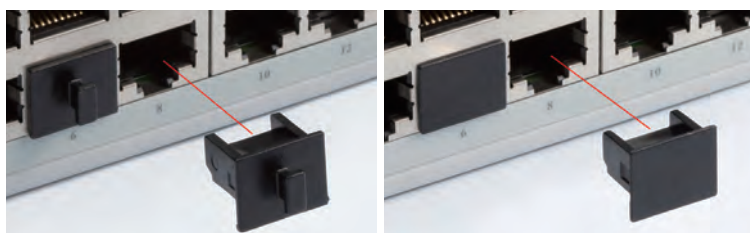

Product no. / Feature

Product no.	Material	Color	Pack of
PJR-45	PE	Black	10
PJS-45	ABS UL94HB	Black	10

■ DXF/DWG/PDF drawings available on our website.

PJCV-1

RJ45 DUSTPROOF CONNECTOR COVER



Product no. / Feature

■ DXF/DWG/PDF drawings available on our website.

Product no.	Material	Color	Pack of
PJCV-1	PE	Natural	10

SFPC • CXP series**FIBER OPTIC PORT DUSTPROOF PLUG**


- Dustproof pull-tab cover plug for fiber optic connector port.

For SFP port

SFPC-11

**For QSFP port**

SFPC-12

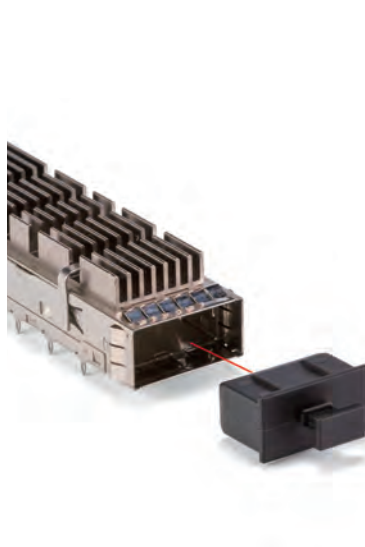**For CXP port**

CXP-2

**Product no. / Feature**

	Product no.	Material	Color	Pack of
NEW	SFPC-11	PE	Black	10
NEW	SFPC-12	PE	Black	10
NEW	CXP-2	PE	Black	10

- DXF/DWG/PDF drawings available on our website.

HDMIC series**HDMI DUSTPROOF BLIND PLUG****HDMIC-1 (Pull-tab type)****HDMIC-3 (No pull-tab type)****Product no. / Feature**

	Product no.	Material	Color	Pack of
	HDMIC-1	PE	Black	10
	HDMIC-3	ABS UL94HB	Black	10

- DXF/DWG/PDF drawings available on our website.

HDMIT-1**HDMI DUSTPROOF CONNECTOR COVER****Product no. / Feature**


	Product no.	Material	Color	Pack of
	HDMIT-1	PE	Natural	10

- DXF/DWG/PDF drawings available on our website.


DIGITAL PRINTED OVERLAY



● 3 reasons for low initial costs

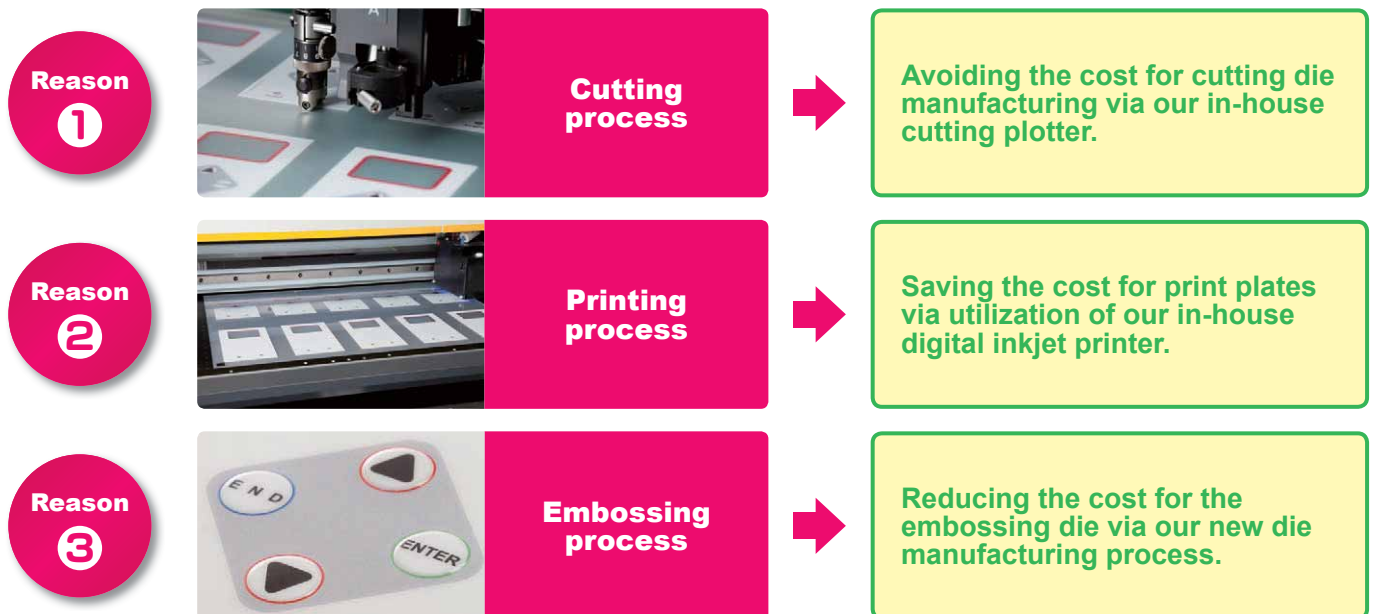

● Comparison of current and previous manufacturing methods

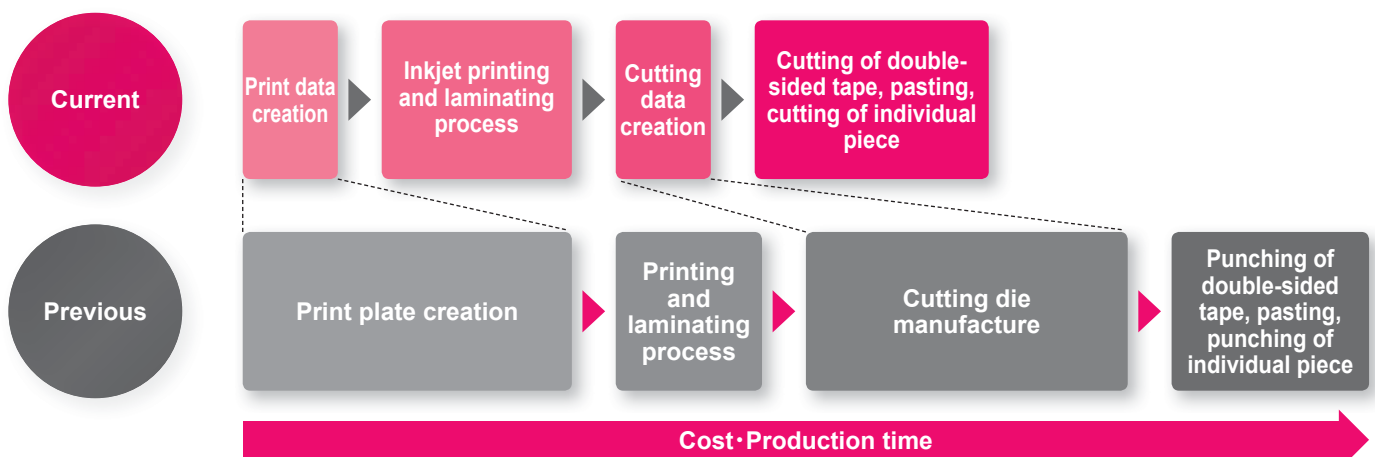

PRODUCTION PROCESS




1. Inkjet printing on film



2. Laminating



3. Cutting double-sided tape

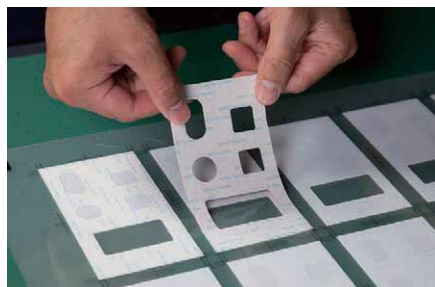

4. Sticking double-sided tape on printed film



5. Cutting the sheet to size



6. Embossing



7. Machining on enclosure



8. Sticking overlay sheet onto enclosure



9. Complete


CUSTOMIZATION EXAMPLE



INKJET PRINTING



Full color digitally designed image
can be printed in 1 run.
No cost difference regardless of the
number of colors used.

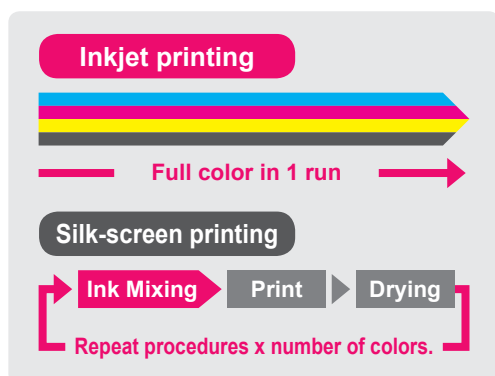

Low printing cost
Full color print possible
in small quantities

Inkjet printing	1 run only for full color print			
Printing cost Full color				
Silk-screen printing	Printing cost x number of colors			
Printing cost Color 1	Printing cost Color 2	Printing cost Color 3	Printing cost Color 4	

High quality printing of photo image and color gradation.

Print photo images in maximum 1,800 x 1,800 dpi quality.

Pictures, logos and unique designs with color gradation can be recreated in a high quality print.




Maximum printable enclosure size




Printable on surfaces with height differential

Printing is possible on recessed, sloped and rounded sections.

Gap difference is less than 2.0mm.

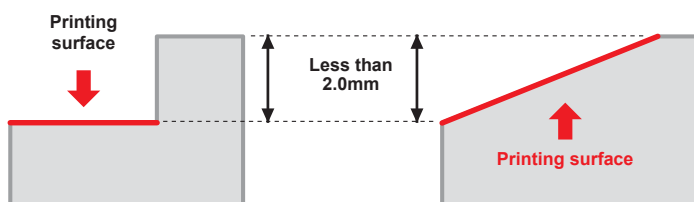

*Not suitable if height difference is more than 2.0mm.

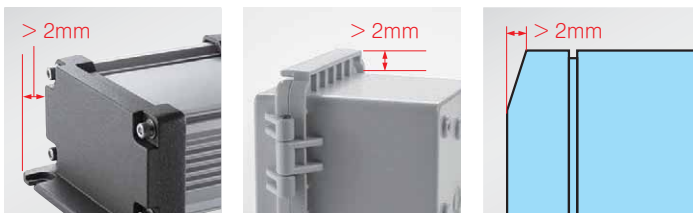

Printed example



CNC MACHINING

CNC milling is a form of computer controlled machining. Similar in operation to drilling and cutting, it is able to create various hole styles and shapes by using a rotating cutting tool to bore into the object.



- Mainly used for plastic, aluminium die-cast, and aluminium extrusion material types.
- Able to perform milling for various shapes and sizes.
- Recommended for small quantity customization.

