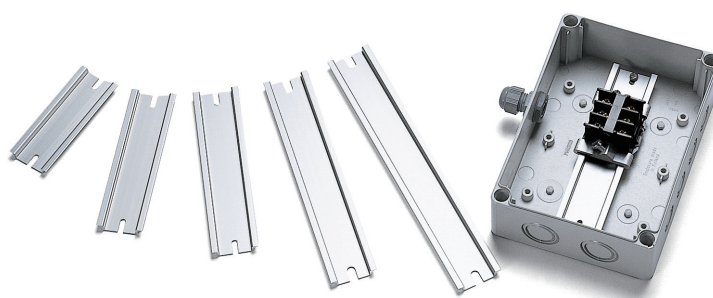
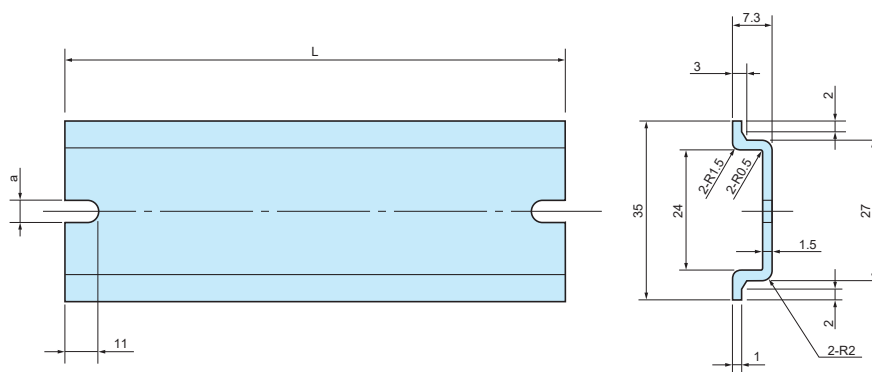


FDR series**DIN RAIL**

Application example

- DIN Rail for installation of terminals, relays, or switches inside enclosures.
- Suitable for DIN Rail types of various manufacturers.

**Product no. / Details**

Product no.	L	a	Matching boss pitch	Weight
FDR- 50	50	4.2	32 ~ 42	8.6
FDR- 57	57	4.2	39 ~ 49	9.5
FDR- 66	66	4.2	48 ~ 58	10
FDR- 77	77	4.2	59 ~ 69	12
FDR- 80	80	4.2	62 ~ 72	13
FDR- 87	87	4.2	69 ~ 79	14
FDR- 92	92	4.2	74 ~ 84	15
FDR-100	100	4.2	82 ~ 92	17.8
FDR-106	106	4.2	88 ~ 98	19
FDR-110	110	4.2	92 ~ 102	20
FDR-120	120	4.2	102 ~ 112	21
FDR-128	128	4.2	110 ~ 120	23
FDR-137	137	4.2	119 ~ 129	24
FDR-142	142	4.2	124 ~ 134	25
FDR-146	146	4.2	128 ~ 138	26
FDR-150	150	4.2	132 ~ 142	25.8
FDR-168	168	4.2	150 ~ 160	30
FDR-170	170	4.2	152 ~ 162	30
FDR-186	186	4.2	168 ~ 178	32
FDR-202	202	4.2	184 ~ 194	37
FDR-205	205	4.2	187 ~ 197	36
FDR-223	223	4.2	205 ~ 215	39.3
FDR-226	226	4.2	208 ~ 218	39
FDR-235	235	4.2	217 ~ 227	42
FDR-242	242	4.2	224 ~ 234	43
FDR-249	249	4.2	231 ~ 241	43
FDR-283	283	4.2	265 ~ 275	49
FDR-300	300	4.2	282 ~ 292	52
NEW FDR-314	314	4.2	296 ~ 306	51.5
FDR-350	350	4.2	332 ~ 342	60
FDR-400	400	4.2	382 ~ 392	69
FDR-450	450	4.2	432 ~ 442	78
FDR-550	550	4.2	532 ~ 542	94

Product no.	L	a	Matching boss pitch	Weight
NEW FDR-B106	106	6.5	90 ~ 96	17.5
FDR-B124	124	6.5	108 ~ 114	21.4
FDR-B142	142	6.5	126 ~ 132	24
FDR-B160	160	6.5	144 ~ 150	28
FDR-B165	165	6.5	149 ~ 155	28
FDR-B176	176	6.5	160 ~ 166	30
FDR-B183	183	6.5	167 ~ 173	30
FDR-B196	196	6.5	180 ~ 186	33
FDR-B223	223	6.5	207 ~ 213	37
FDR-B256	256	6.5	240 ~ 246	43
FDR-B260	260	6.5	244 ~ 250	45
NEW FDR-B276	276	6.5	260 ~ 266	47.5
FDR-B303	303	6.5	287 ~ 293	52
NEW FDR-B327	327	6.5	311 ~ 317	56.2
FDR-B338	338	6.5	322 ~ 328	57
FDR-B360	360	6.5	344 ~ 350	63
FDR-B376	376	6.5	360 ~ 366	64
FDR-B383	383	6.5	367 ~ 373	65
FDR-B463	463	6.5	447 ~ 453	87
FDR-1000	1,000	—	—	169.5

- Material / Finish: A6063S-T5 / Silver anodized
- FDR-1000 does not have mounting holes.