

AU series

NEXT GENERATION Aluminium Case

The perfect unity of flexibility, versatility, and appearance!



8 Distinct Models for Different Applications

Standard Model AU series


Standard model with front/rear sheet aluminium panels.



See page 243 ~ 248

Detachable Panel Model AUP series

Easy maintenance with detachable front/rear panels.
An EMC shielded AUPE series is also available.

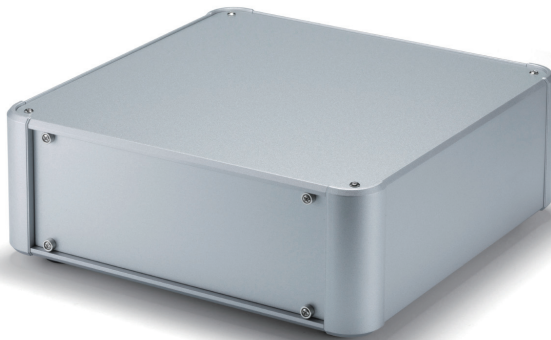

See page 249 ~ 254

Control Box Model AUX series

Structure of extruded aluminium frames on 4 sides.

Suitable for control box use.

EMC shielded AUXE series is also available.



See page 261 ~ 266

Corner Guard Model AUG series

TPE Corner guard model.

An EMC shielded AUG series and a carrying handle equipped portable AUGH series are also available.



See page 275 ~ 280

Providing versatile and flexible enclosing solutions

The aluminium case AU series has an assembly-type structure which allows it to be easily customizable. Both versatile and flexible, it is designed to be used as various devices from the classic audio amplifiers to next-gen IoT devices.

Select from a huge line-up of 430 different sizes based on your application type and ideas.

Measuring Equipment



Command Panel



Fiber Optic Transmitter



Industrial Embedded PC



Audio Amplifier



Power Supply




Tube amplifier





- Rugged design aluminium enclosure with TPE (Elastomer) corner guards. Corner guards also act as non-slip rubber feet.
- A large selection of 430 different sizes to choose from.
- A total of 8 selectable color combinations with 4 corner guard colors - Black, Gray, Navy and Red - and 2 enclosure colors - Silver and Black anodized.
- Versatile aluminium case suitable for use as measuring instrument, controller, industrial embedded computer, power supply, audio amplifier, and more.

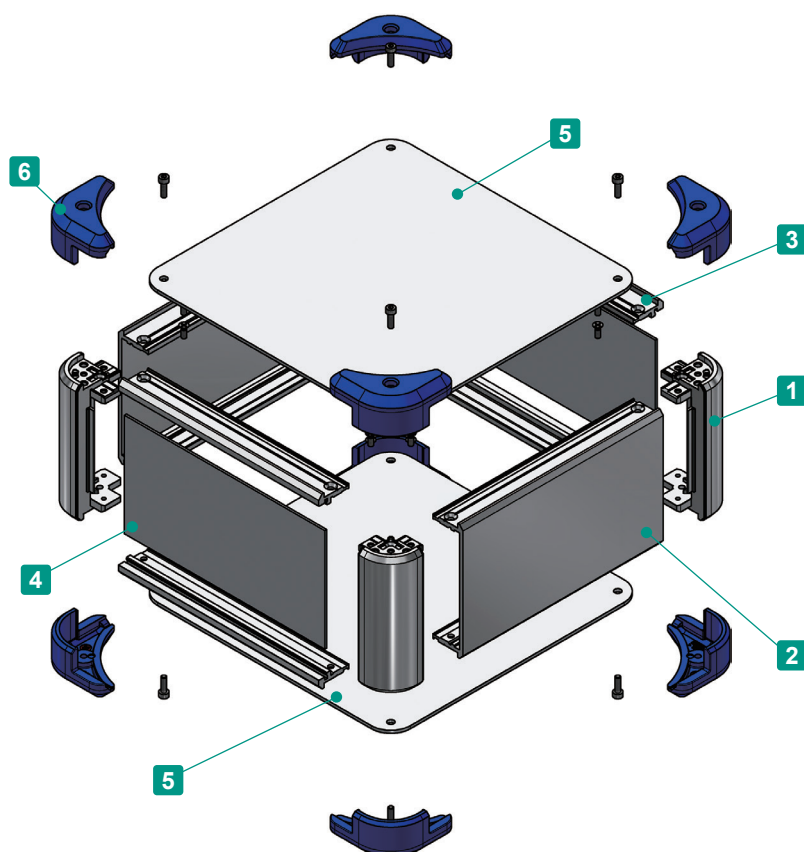

Included screws

- Top / Bottom cover (not applicable to some models)
M3-5 original trapezoid head (hex) &
Nickel plated / Black trivalent chromate x 4~8 pcs
- Frame / Panel support frame
M3-8 flat head & Nickel plated x 16 pcs
- Corner guard
M3-10 hex & Black trivalent chromate x 8 pcs
- * Hex wrench included.

Recommended torque : $\begin{cases} \text{M3-10 hex} : 0.2\text{N} \cdot \text{m} \\ \text{Other screws} : 0.3 \sim 0.6\text{N} \cdot \text{m} \end{cases}$





* Recommended torque listed is for reference only; actual may differ.
Assemble after testing torque.

Components

No.	Part name	Pcs	Material	Color / Finish
1	Corner block	4	Diecast aluminium ADC12	Silver • Black / Painted (Unfinished inside)
2	Frame	2	Extruded aluminium A6063S-T5	Silver • Black / Anodized with clear coating
3	Panel support frame	4	Extruded aluminium A6063S-T5	Silver • Black / Anodized with clear coating
4	Panel	2	Aluminium A1100P	Silver • Black / Anodized
5	Top • bottom cover	2	Aluminium A1100P	Silver • Black / Anodized
6	Corner guard	8	TPE (Elastomer)	Black • Gray • Navy • Red

Color

Please choose from the color combinations listed below.

S B (Silver / Black)**S G** (Silver / Gray)**S N** (Silver / Navy)**S R** (Silver / Red)**B B** (Black / Black)**B G** (Black / Gray)**B N** (Black / Navy)**B R** (Black / Red)

Product Number

To determine a product number, fill H-W-D dimensions and select Color code in the following blank boxes.

AUG

-



-



-

**H-W-D dimensions**

See page 277~280 for dimensions / product no.


ColorSB • SG • SN • SR
BB • BG • BN • BR

Numbering example :

If looking at "H100 x W308 x D208mm, Color type BR"


➔ **AUG 88-30-20-BR**

Accessories (Optional parts)

Mounting plate AUC series
See page 293 ~ 294Elastomer carrying handle FM200
See websiteTilt leg TLW series
See page 239

AUG dimensions

■ DXF/DWG/PDF/STP drawings available on our website.

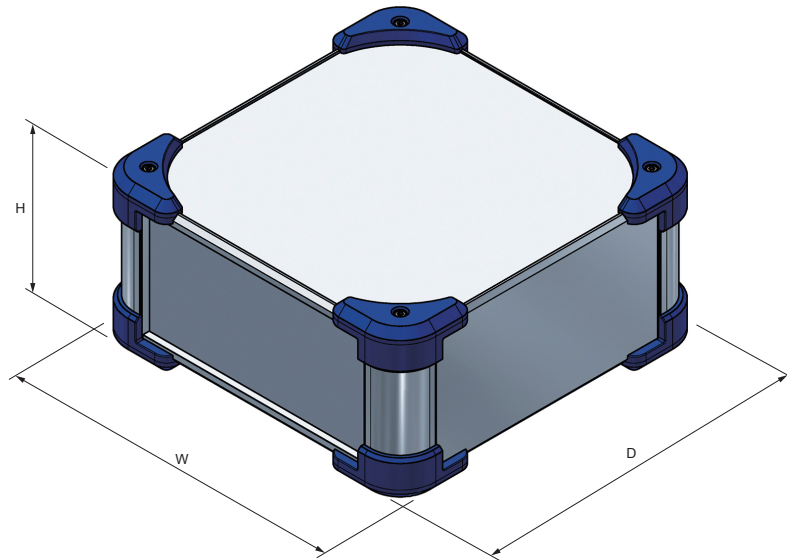

Product no. / Details

■ Please suffix color code at the end of the product number.

Product no.	H	W	D	Weight (kg)
AUG 44-16-16-□□	56	168	168	0.7
AUG 44-16-20-□□	56	168	208	0.8
AUG 44-16-25-□□	56	168	258	1.0
AUG 44-16-30-□□	56	168	308	1.1
AUG 44-16-36-□□	56	168	368	1.3
AUG 44-16-43-□□	56	168	438	1.5
AUG 44-20-16-□□	56	208	168	0.8
AUG 44-20-20-□□	56	208	208	1.0
AUG 44-20-25-□□	56	208	258	1.1
AUG 44-20-30-□□	56	208	308	1.3
AUG 44-20-36-□□	56	208	368	1.5
AUG 44-20-43-□□	56	208	438	1.7
AUG 44-25-16-□□	56	258	168	1.0
AUG 44-25-20-□□	56	258	208	1.1
AUG 44-25-25-□□	56	258	258	1.3
AUG 44-25-30-□□	56	258	308	1.5
AUG 44-25-36-□□	56	258	368	1.7
AUG 44-25-43-□□	56	258	438	2.0
AUG 44-30-16-□□	56	308	168	1.1
AUG 44-30-20-□□	56	308	208	1.3
AUG 44-30-25-□□	56	308	258	1.5
AUG 44-30-30-□□	56	308	308	1.7
AUG 44-30-36-□□	56	308	368	2.0
AUG 44-30-43-□□	56	308	438	2.3
AUG 44-30-50-□□	56	308	508	2.6
AUG 44-36-16-□□	56	368	168	1.3
AUG 44-36-20-□□	56	368	208	1.5
AUG 44-36-25-□□	56	368	258	1.7
AUG 44-36-30-□□	56	368	308	2.0
AUG 44-36-36-□□	56	368	368	2.3
AUG 44-36-43-□□	56	368	438	2.7
AUG 44-36-50-□□	56	368	508	3.0
AUG 44-43-16-□□	56	438	168	1.5
AUG 44-43-20-□□	56	438	208	1.7
AUG 44-43-25-□□	56	438	258	2.0
AUG 44-43-30-□□	56	438	308	2.3
AUG 44-43-36-□□	56	438	368	2.6
AUG 44-43-43-□□	56	438	438	3.0
AUG 44-43-50-□□	56	438	508	3.4
AUG 44-50-30-□□	56	508	308	2.6
AUG 44-50-36-□□	56	508	368	3.0
AUG 44-50-43-□□	56	508	438	3.4
AUG 44-50-50-□□	56	508	508	3.9

Product no.	H	W	D	Weight (kg)
AUG 66-16-16-□□	78	168	168	0.9
AUG 66-16-20-□□	78	168	208	1.0
AUG 66-16-25-□□	78	168	258	1.2
AUG 66-16-30-□□	78	168	308	1.3
AUG 66-16-36-□□	78	168	368	1.5
AUG 66-16-43-□□	78	168	438	1.8
AUG 66-20-16-□□	78	208	168	1.0
AUG 66-20-20-□□	78	208	208	1.2
AUG 66-20-25-□□	78	208	258	1.3
AUG 66-20-30-□□	78	208	308	1.5
AUG 66-20-36-□□	78	208	368	1.7
AUG 66-20-43-□□	78	208	438	2.0
AUG 66-25-16-□□	78	258	168	1.2
AUG 66-25-20-□□	78	258	208	1.3
AUG 66-25-25-□□	78	258	258	1.5
AUG 66-25-30-□□	78	258	308	1.7
AUG 66-25-36-□□	78	258	368	2.0
AUG 66-25-43-□□	78	258	438	2.3
AUG 66-30-16-□□	78	308	168	1.3
AUG 66-30-20-□□	78	308	208	1.5
AUG 66-30-25-□□	78	308	258	1.7
AUG 66-30-30-□□	78	308	308	2.0
AUG 66-30-36-□□	78	308	368	2.2
AUG 66-30-43-□□	78	308	438	2.6
AUG 66-30-50-□□	78	308	508	2.9
AUG 66-36-16-□□	78	368	168	1.5
AUG 66-36-20-□□	78	368	208	1.7
AUG 66-36-25-□□	78	368	258	2.0
AUG 66-36-30-□□	78	368	308	2.2
AUG 66-36-36-□□	78	368	368	2.5
AUG 66-36-43-□□	78	368	438	2.9
AUG 66-36-50-□□	78	368	508	3.3
AUG 66-43-16-□□	78	438	168	1.7
AUG 66-43-20-□□	78	438	208	2.0
AUG 66-43-25-□□	78	438	258	2.3
AUG 66-43-30-□□	78	438	308	2.6
AUG 66-43-36-□□	78	438	368	2.9
AUG 66-43-43-□□	78	438	438	3.3
AUG 66-43-50-□□	78	438	508	3.8
AUG 66-50-30-□□	78	508	308	2.9
AUG 66-50-36-□□	78	508	368	3.3
AUG 66-50-43-□□	78	508	438	3.8
AUG 66-50-50-□□	78	508	508	4.2

Product no. / Details

■ Please suffix color code at the end of the product number.

Product no.	H	W	D	Weight (kg)
AUG 88-16-16-□□	100	168	168	1.0
AUG 88-16-20-□□	100	168	208	1.1
AUG 88-16-25-□□	100	168	258	1.3
AUG 88-16-30-□□	100	168	308	1.5
AUG 88-16-36-□□	100	168	368	1.7
AUG 88-16-43-□□	100	168	438	1.9
AUG 88-20-16-□□	100	208	168	1.1
AUG 88-20-20-□□	100	208	208	1.3
AUG 88-20-25-□□	100	208	258	1.5
AUG 88-20-30-□□	100	208	308	1.7
AUG 88-20-36-□□	100	208	368	1.9
AUG 88-20-43-□□	100	208	438	2.2
AUG 88-25-16-□□	100	258	168	1.3
AUG 88-25-20-□□	100	258	208	1.5
AUG 88-25-25-□□	100	258	258	1.7
AUG 88-25-30-□□	100	258	308	1.9
AUG 88-25-36-□□	100	258	368	2.2
AUG 88-25-43-□□	100	258	438	2.5
AUG 88-30-16-□□	100	308	168	1.4
AUG 88-30-20-□□	100	308	208	1.6
AUG 88-30-25-□□	100	308	258	1.9
AUG 88-30-30-□□	100	308	308	2.1
AUG 88-30-36-□□	100	308	368	2.4
AUG 88-30-43-□□	100	308	438	2.8
AUG 88-30-50-□□	100	308	508	3.1
AUG 88-36-16-□□	100	368	168	1.6
AUG 88-36-20-□□	100	368	208	1.8
AUG 88-36-25-□□	100	368	258	2.1
AUG 88-36-30-□□	100	368	308	2.4
AUG 88-36-36-□□	100	368	368	2.7
AUG 88-36-43-□□	100	368	438	3.2
AUG 88-36-50-□□	100	368	508	3.5
AUG 88-43-16-□□	100	438	168	1.9
AUG 88-43-20-□□	100	438	208	2.1
AUG 88-43-25-□□	100	438	258	2.4
AUG 88-43-30-□□	100	438	308	2.8
AUG 88-43-36-□□	100	438	368	3.1
AUG 88-43-43-□□	100	438	438	3.6
AUG 88-43-50-□□	100	438	508	4.0
AUG 88-50-30-□□	100	508	308	3.1
AUG 88-50-36-□□	100	508	368	3.5
AUG 88-50-43-□□	100	508	438	4.0
AUG 88-50-50-□□	100	508	508	4.5
NEW AUG 99-16-16-□□	111	168	168	1.0
NEW AUG 99-16-20-□□	111	168	208	1.1
NEW AUG 99-16-25-□□	111	168	258	1.3
NEW AUG 99-16-30-□□	111	168	308	1.5
NEW AUG 99-16-36-□□	111	168	368	1.7
NEW AUG 99-16-43-□□	111	168	438	2.0
NEW AUG 99-20-16-□□	111	208	168	1.1
NEW AUG 99-20-20-□□	111	208	208	1.3
NEW AUG 99-20-25-□□	111	208	258	1.5
NEW AUG 99-20-30-□□	111	208	308	1.7
NEW AUG 99-20-36-□□	111	208	368	1.9
NEW AUG 99-20-43-□□	111	208	438	2.2
NEW AUG 99-25-16-□□	111	258	168	1.3
NEW AUG 99-25-20-□□	111	258	208	1.4
NEW AUG 99-25-25-□□	111	258	258	1.7
NEW AUG 99-25-30-□□	111	258	308	1.9
NEW AUG 99-25-36-□□	111	258	368	2.2
NEW AUG 99-25-43-□□	111	258	438	2.5
NEW AUG 99-30-16-□□	111	308	168	1.4
NEW AUG 99-30-20-□□	111	308	208	1.6
NEW AUG 99-30-25-□□	111	308	258	1.9
NEW AUG 99-30-30-□□	111	308	308	2.1

Product no.	H	W	D	Weight (kg)
NEW AUG 99-30-36-□□	111	308	368	2.4
NEW AUG 99-30-43-□□	111	308	438	2.8
NEW AUG 99-30-50-□□	111	308	508	3.2
NEW AUG 99-36-16-□□	111	368	168	1.6
NEW AUG 99-36-20-□□	111	368	208	1.8
NEW AUG 99-36-25-□□	111	368	258	2.1
NEW AUG 99-36-30-□□	111	368	308	2.4
NEW AUG 99-36-36-□□	111	368	368	2.8
NEW AUG 99-36-43-□□	111	368	438	3.2
NEW AUG 99-36-50-□□	111	368	508	3.6
NEW AUG 99-43-16-□□	111	438	168	1.9
NEW AUG 99-43-20-□□	111	438	208	2.1
NEW AUG 99-43-25-□□	111	438	258	2.5
NEW AUG 99-43-30-□□	111	438	308	2.8
NEW AUG 99-43-36-□□	111	438	368	3.2
NEW AUG 99-43-43-□□	111	438	438	3.6
NEW AUG 99-43-50-□□	111	438	508	4.1
NEW AUG 99-50-30-□□	111	508	308	3.1
NEW AUG 99-50-36-□□	111	508	368	3.5
NEW AUG 99-50-43-□□	111	508	438	4.0
NEW AUG 99-50-50-□□	111	508	508	4.5
NEW AUG115-16-16-□□	127	168	168	1.0
NEW AUG115-16-20-□□	127	168	208	1.2
NEW AUG115-16-25-□□	127	168	258	1.4
NEW AUG115-16-30-□□	127	168	308	1.6
NEW AUG115-16-36-□□	127	168	368	1.8
NEW AUG115-16-43-□□	127	168	438	2.1
NEW AUG115-20-16-□□	127	208	168	1.2
NEW AUG115-20-20-□□	127	208	208	1.4
NEW AUG115-20-25-□□	127	208	258	1.6
NEW AUG115-20-30-□□	127	208	308	1.8
NEW AUG115-20-36-□□	127	208	368	2.0
NEW AUG115-20-43-□□	127	208	438	2.3
NEW AUG115-25-16-□□	127	258	168	1.3
NEW AUG115-25-20-□□	127	258	208	1.5
NEW AUG115-25-25-□□	127	258	258	1.8
NEW AUG115-25-30-□□	127	258	308	2.0
NEW AUG115-25-36-□□	127	258	368	2.3
NEW AUG115-25-43-□□	127	258	438	2.7
NEW AUG115-30-16-□□	127	308	168	1.5
NEW AUG115-30-20-□□	127	308	208	1.7
NEW AUG115-30-25-□□	127	308	258	2.0
NEW AUG115-30-30-□□	127	308	308	2.3
NEW AUG115-30-36-□□	127	308	368	2.6
NEW AUG115-30-43-□□	127	308	438	3.0
NEW AUG115-30-50-□□	127	308	508	3.3
NEW AUG115-36-16-□□	127	368	168	1.7
NEW AUG115-36-20-□□	127	368	208	2.0
NEW AUG115-36-25-□□	127	368	258	2.2
NEW AUG115-36-30-□□	127	368	308	2.5
NEW AUG115-36-36-□□	127	368	368	2.9
NEW AUG115-36-43-□□	127	368	438	3.3
NEW AUG115-36-50-□□	127	368	508	3.8
NEW AUG115-43-16-□□	127	438	168	2.0
NEW AUG115-43-20-□□	127	438	208	2.2
NEW AUG115-43-25-□□	127	438	258	2.6
NEW AUG115-43-30-□□	127	438	308	2.9
NEW AUG115-43-36-□□	127	438	368	3.3
NEW AUG115-43-43-□□	127	438	438	3.8
NEW AUG115-43-50-□□	127	438	508	4.2
NEW AUG115-50-30-□□	127	508	308	3.3
NEW AUG115-50-36-□□	127	508	368	3.7
NEW AUG115-50-43-□□	127	508	438	4.2
NEW AUG115-50-50-□□	127	508	508	4.7

Product no. / Details

Product no.	H	W	D	Weight (kg)
AUG133-16-16-□□	144.5	168	168	1.2
AUG133-16-20-□□	144.5	168	208	1.4
AUG133-16-25-□□	144.5	168	258	1.6
AUG133-16-30-□□	144.5	168	308	1.8
AUG133-16-36-□□	144.5	168	368	2.1
AUG133-16-43-□□	144.5	168	438	2.4
AUG133-20-16-□□	144.5	208	168	1.4
AUG133-20-20-□□	144.5	208	208	1.6
AUG133-20-25-□□	144.5	208	258	1.8
AUG133-20-30-□□	144.5	208	308	2.0
AUG133-20-36-□□	144.5	208	368	2.3
AUG133-20-43-□□	144.5	208	438	2.7
AUG133-25-16-□□	144.5	258	168	1.5
AUG133-25-20-□□	144.5	258	208	1.8
AUG133-25-25-□□	144.5	258	258	2.0
AUG133-25-30-□□	144.5	258	308	2.3
AUG133-25-36-□□	144.5	258	368	2.6
AUG133-25-43-□□	144.5	258	438	3.0
AUG133-30-16-□□	144.5	308	168	1.7
AUG133-30-20-□□	144.5	308	208	2.0
AUG133-30-25-□□	144.5	308	258	2.2
AUG133-30-30-□□	144.5	308	308	2.5
AUG133-30-36-□□	144.5	308	368	2.9
AUG133-30-43-□□	144.5	308	438	3.3
AUG133-30-50-□□	144.5	308	508	3.7
AUG133-36-16-□□	144.5	368	168	1.9
AUG133-36-20-□□	144.5	368	208	2.2
AUG133-36-25-□□	144.5	368	258	2.5
AUG133-36-30-□□	144.5	368	308	2.8
AUG133-36-36-□□	144.5	368	368	3.2
AUG133-36-43-□□	144.5	368	438	3.7
AUG133-36-50-□□	144.5	368	508	4.2
AUG133-43-16-□□	144.5	438	168	2.2
AUG133-43-20-□□	144.5	438	208	2.5
AUG133-43-25-□□	144.5	438	258	2.9
AUG133-43-30-□□	144.5	438	308	3.2
AUG133-43-36-□□	144.5	438	368	3.6
AUG133-43-43-□□	144.5	438	438	4.2
AUG133-43-50-□□	144.5	438	508	4.7
AUG133-50-30-□□	144.5	508	308	3.6
AUG133-50-36-□□	144.5	508	368	4.0
AUG133-50-43-□□	144.5	508	438	4.6
AUG133-50-50-□□	144.5	508	508	5.2
NEW AUG149-16-16-□□	161	168	168	1.2
NEW AUG149-16-20-□□	161	168	208	1.4
NEW AUG149-16-25-□□	161	168	258	1.7
NEW AUG149-16-30-□□	161	168	308	1.9
NEW AUG149-16-36-□□	161	168	368	2.2
NEW AUG149-16-43-□□	161	168	438	2.5
NEW AUG149-20-16-□□	161	208	168	1.4
NEW AUG149-20-20-□□	161	208	208	1.6
NEW AUG149-20-25-□□	161	208	258	1.8
NEW AUG149-20-30-□□	161	208	308	2.1
NEW AUG149-20-36-□□	161	208	368	2.4
NEW AUG149-20-43-□□	161	208	438	2.8
NEW AUG149-25-16-□□	161	258	168	1.6
NEW AUG149-25-20-□□	161	258	208	1.8
NEW AUG149-25-25-□□	161	258	258	2.1
NEW AUG149-25-30-□□	161	258	308	2.3
NEW AUG149-25-36-□□	161	258	368	2.7
NEW AUG149-25-43-□□	161	258	438	3.1
NEW AUG149-30-16-□□	161	308	168	1.7
NEW AUG149-30-20-□□	161	308	208	2.0
NEW AUG149-30-25-□□	161	308	258	2.3
NEW AUG149-30-30-□□	161	308	308	2.6

■ Please suffix color code at the end of the product number.



Product no.	H	W	D	Weight (kg)
NEW AUG149-30-36-□□	161	308	368	3.0
NEW AUG149-30-43-□□	161	308	438	3.4
NEW AUG149-30-50-□□	161	308	508	3.9
NEW AUG149-36-16-□□	161	368	168	2.0
NEW AUG149-36-20-□□	161	368	208	2.2
NEW AUG149-36-25-□□	161	368	258	2.6
NEW AUG149-36-30-□□	161	368	308	2.9
NEW AUG149-36-36-□□	161	368	368	3.3
NEW AUG149-36-43-□□	161	368	438	3.8
NEW AUG149-36-50-□□	161	368	508	4.3
NEW AUG149-43-16-□□	161	438	168	2.2
NEW AUG149-43-20-□□	161	438	208	2.5
NEW AUG149-43-25-□□	161	438	258	2.9
NEW AUG149-43-30-□□	161	438	308	3.3
NEW AUG149-43-36-□□	161	438	368	3.7
NEW AUG149-43-43-□□	161	438	438	4.3
NEW AUG149-43-50-□□	161	438	508	4.8
NEW AUG149-50-30-□□	161	508	308	3.7
NEW AUG149-50-36-□□	161	508	368	4.1
NEW AUG149-50-43-□□	161	508	438	4.7
NEW AUG149-50-50-□□	161	508	508	5.3
AUG177-16-16-□□	189	168	168	1.4
AUG177-16-20-□□	189	168	208	1.6
AUG177-16-25-□□	189	168	258	1.8
AUG177-16-30-□□	189	168	308	2.1
AUG177-16-36-□□	189	168	368	2.4
AUG177-16-43-□□	189	168	438	2.8
AUG177-20-16-□□	189	208	168	1.5
AUG177-20-20-□□	189	208	208	1.8
AUG177-20-25-□□	189	208	258	2.0
AUG177-20-30-□□	189	208	308	2.3
AUG177-20-36-□□	189	208	368	2.6
AUG177-20-43-□□	189	208	438	3.0
AUG177-25-16-□□	189	258	168	1.7
AUG177-25-20-□□	189	258	208	2.0
AUG177-25-25-□□	189	258	258	2.3
AUG177-25-30-□□	189	258	308	2.6
AUG177-25-36-□□	189	258	368	2.9
AUG177-25-43-□□	189	258	438	3.4
AUG177-30-16-□□	189	308	168	1.9
AUG177-30-20-□□	189	308	208	2.2
AUG177-30-25-□□	189	308	258	2.5
AUG177-30-30-□□	189	308	308	2.8
AUG177-30-36-□□	189	308	368	3.2
AUG177-30-43-□□	189	308	438	3.7
AUG177-30-50-□□	189	308	508	4.2
AUG177-36-16-□□	189	368	168	2.1
AUG177-36-20-□□	189	368	208	2.4
AUG177-36-25-□□	189	368	258	2.8
AUG177-36-30-□□	189	368	308	3.2
AUG177-36-36-□□	189	368	368	3.6
AUG177-36-43-□□	189	368	438	4.1
AUG177-36-50-□□	189	368	508	4.6
AUG177-43-16-□□	189	438	168	2.4
AUG177-43-20-□□	189	438	208	2.8
AUG177-43-25-□□	189	438	258	3.2
AUG177-43-30-□□	189	438	308	3.6
AUG177-43-36-□□	189	438	368	4.0
AUG177-43-43-□□	189	438	438	4.6
AUG177-43-50-□□	189	438	508	5.1
AUG177-50-30-□□	189	508	308	3.9
AUG177-50-36-□□	189	508	368	4.5
AUG177-50-43-□□	189	508	438	5.1
AUG177-50-50-□□	189	508	508	5.7

Product no. / Details


■ Please suffix color code at the end of the product number.

Product no.	H	W	D	Weight (kg)
NEW AUG222-16-16-□□	233.5	168	168	1.6
NEW AUG222-16-20-□□	233.5	168	208	1.8
NEW AUG222-16-25-□□	233.5	168	258	2.1
NEW AUG222-16-30-□□	233.5	168	308	2.4
NEW AUG222-16-36-□□	233.5	168	368	2.8
NEW AUG222-16-43-□□	233.5	168	438	3.2
NEW AUG222-20-16-□□	233.5	208	168	1.8
NEW AUG222-20-20-□□	233.5	208	208	2.0
NEW AUG222-20-25-□□	233.5	208	258	2.3
NEW AUG222-20-30-□□	233.5	208	308	2.6
NEW AUG222-20-36-□□	233.5	208	368	3.0
NEW AUG222-20-43-□□	233.5	208	438	3.5
NEW AUG222-25-16-□□	233.5	258	168	2.0
NEW AUG222-25-20-□□	233.5	258	208	2.3
NEW AUG222-25-25-□□	233.5	258	258	2.6
NEW AUG222-25-30-□□	233.5	258	308	2.9
NEW AUG222-25-36-□□	233.5	258	368	3.3
NEW AUG222-25-43-□□	233.5	258	438	3.8
NEW AUG222-30-16-□□	233.5	308	168	2.2
NEW AUG222-30-20-□□	233.5	308	208	2.5
NEW AUG222-30-25-□□	233.5	308	258	2.8
NEW AUG222-30-30-□□	233.5	308	308	3.2
NEW AUG222-30-36-□□	233.5	308	368	3.6
NEW AUG222-30-43-□□	233.5	308	438	4.2
NEW AUG222-30-50-□□	233.5	308	508	4.7
NEW AUG222-36-16-□□	233.5	368	168	2.4
NEW AUG222-36-20-□□	233.5	368	208	2.8
NEW AUG222-36-25-□□	233.5	368	258	3.2
NEW AUG222-36-30-□□	233.5	368	308	3.6
NEW AUG222-36-36-□□	233.5	368	368	4.0
NEW AUG222-36-43-□□	233.5	368	438	4.6
NEW AUG222-36-50-□□	233.5	368	508	5.2
NEW AUG222-43-16-□□	233.5	438	168	2.8
NEW AUG222-43-20-□□	233.5	438	208	3.1
NEW AUG222-43-25-□□	233.5	438	258	3.5
NEW AUG222-43-30-□□	233.5	438	308	4.0
NEW AUG222-43-36-□□	233.5	438	368	4.5
NEW AUG222-43-43-□□	233.5	438	438	5.1
NEW AUG222-43-50-□□	233.5	438	508	5.7
NEW AUG222-50-30-□□	233.5	508	308	4.4
NEW AUG222-50-36-□□	233.5	508	368	4.9
NEW AUG222-50-43-□□	233.5	508	438	5.6
NEW AUG222-50-50-□□	233.5	508	508	6.3

Product no.	H	W	D	Weight (kg)
NEW AUG266-16-16-□□	277.9	168	168	1.9
NEW AUG266-16-20-□□	277.9	168	208	2.2
NEW AUG266-16-25-□□	277.9	168	258	2.5
NEW AUG266-16-30-□□	277.9	168	308	2.9
NEW AUG266-16-36-□□	277.9	168	368	3.3
NEW AUG266-16-43-□□	277.9	168	438	3.9
NEW AUG266-20-16-□□	277.9	208	168	2.1
NEW AUG266-20-20-□□	277.9	208	208	2.4
NEW AUG266-20-25-□□	277.9	208	258	2.8
NEW AUG266-20-30-□□	277.9	208	308	3.1
NEW AUG266-20-36-□□	277.9	208	368	3.6
NEW AUG266-20-43-□□	277.9	208	438	4.2
NEW AUG266-25-16-□□	277.9	258	168	2.3
NEW AUG266-25-20-□□	277.9	258	208	2.6
NEW AUG266-25-25-□□	277.9	258	258	3.0
NEW AUG266-25-30-□□	277.9	258	308	3.4
NEW AUG266-25-36-□□	277.9	258	368	3.9
NEW AUG266-25-43-□□	277.9	258	438	4.5
NEW AUG266-30-16-□□	277.9	308	168	2.5
NEW AUG266-30-20-□□	277.9	308	208	2.9
NEW AUG266-30-25-□□	277.9	308	258	3.3
NEW AUG266-30-30-□□	277.9	308	308	3.7
NEW AUG266-30-36-□□	277.9	308	368	4.3
NEW AUG266-30-43-□□	277.9	308	438	4.9
NEW AUG266-30-50-□□	277.9	308	508	5.5
NEW AUG266-36-16-□□	277.9	368	168	2.8
NEW AUG266-36-20-□□	277.9	368	208	3.2
NEW AUG266-36-25-□□	277.9	368	258	3.6
NEW AUG266-36-30-□□	277.9	368	308	4.1
NEW AUG266-36-36-□□	277.9	368	368	4.7
NEW AUG266-36-43-□□	277.9	368	438	5.4
NEW AUG266-36-50-□□	277.9	368	508	6.0
NEW AUG266-43-16-□□	277.9	438	168	3.2
NEW AUG266-43-20-□□	277.9	438	208	3.6
NEW AUG266-43-25-□□	277.9	438	258	4.1
NEW AUG266-43-30-□□	277.9	438	308	4.6
NEW AUG266-43-36-□□	277.9	438	368	5.2
NEW AUG266-43-43-□□	277.9	438	438	5.9
NEW AUG266-43-50-□□	277.9	438	508	6.6
NEW AUG266-50-30-□□	277.9	508	308	5.0
NEW AUG266-50-36-□□	277.9	508	368	5.6
NEW AUG266-50-43-□□	277.9	508	438	6.4
NEW AUG266-50-50-□□	277.9	508	508	7.2

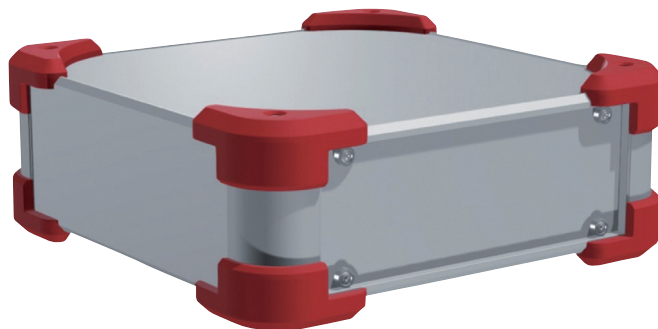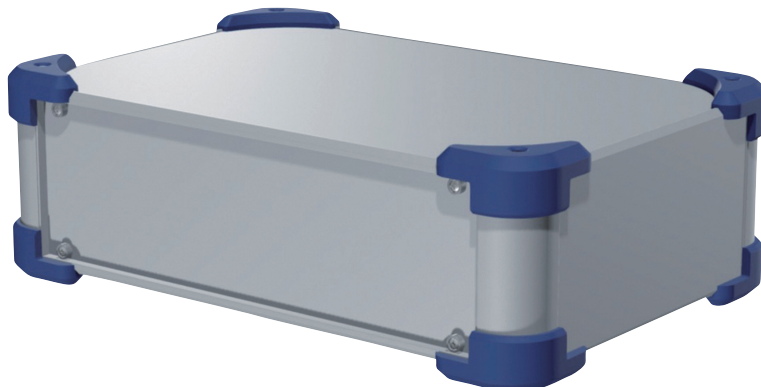EMC
Shielding

- Shielding gasket allows the enclosure to be EMC shielded.
- Rugged design EMC shielded aluminium enclosure with TPE (Elastomer) corner guards. Corner guards also act as non-slip rubber feet.
- Suitable to be used as an easy maintenance desktop case due to its detachable front/rear panels. Captive screws allow for ease of maintenance as there is little risk of the screws dropping out and getting lost.
- A large selection of 387 different sizes to choose from.
- A total of 4 selectable color combinations with a silver anodized body and 4 corner guard colors - Black, Gray, Navy and Red.

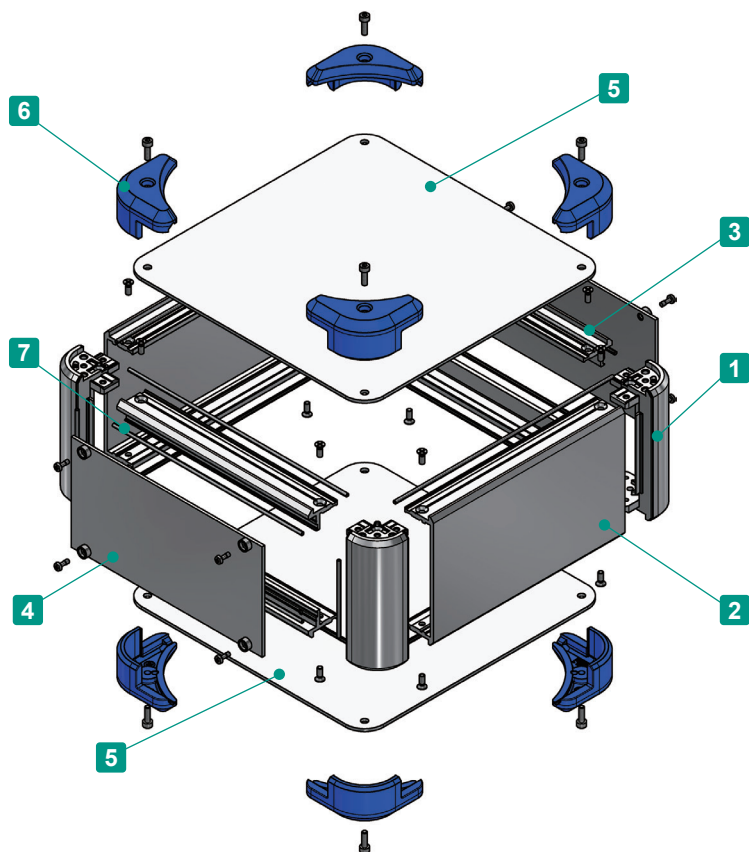

Included screws :

- Top / Bottom cover (not applicable to some models)
M3-5 original trapezoid head (hex) & Nickel plated x 4~8 pcs
- Frame / Panel support frame
M3-8 flat head & Nickel plated x 16 pcs
- Corner guard
M3-10 hex & Black trivalent chromate x 8 pcs
- * Hex wrench included.
- Panel
Captive M2.5-7 pan head & Nickel plated x 8~12 pcs

Recommended torque :

M3 -10 hex :	0.2N • m
M2.5-7 pan head :	0.15 ~ 0.2N • m
Other screws :	0.3 ~ 0.6N • m

* Recommended torque listed is for reference only; actual may differ.
Assemble after testing torque.




Components

No.	Part name	Pcs	Material	Color / Finish
1	Corner block	4	Diecast aluminium ADC12	Silver / Painted (Unfinished inside)
2	Frame	2	Extruded aluminium A6063S-T5	Silver / Painted (Unfinished inside)
3	Panel support frame	4	Extruded aluminium A6063S-T5	Silver / Painted (Unfinished inside)
4	Panel	2	Aluminium A1100P	Silver / Painted (Conductive inside)
5	Top • bottom cover	2	Aluminium A1100P	Silver / Painted (Conductive inside)
6	Corner guard	8	TPE (Elastomer)	Black • Gray • Navy • Red
7	EMC shielding gasket	16	Conductive fiber UL94V-0	Metallic gray

Color

Please choose from the color combinations listed below.

S **B** (Silver / Black)

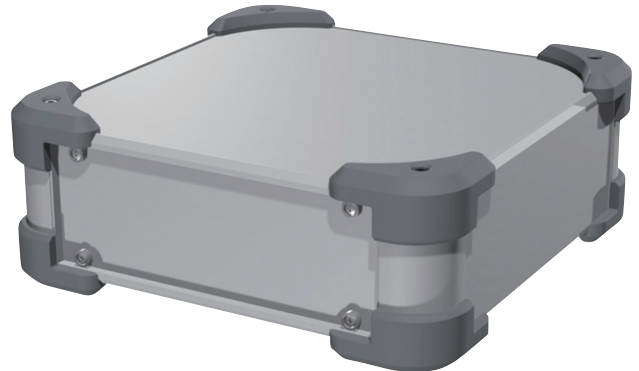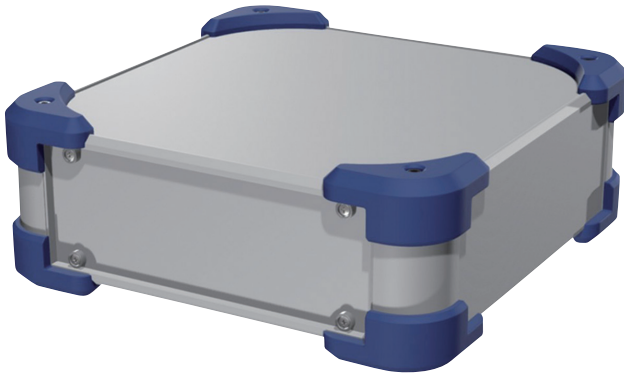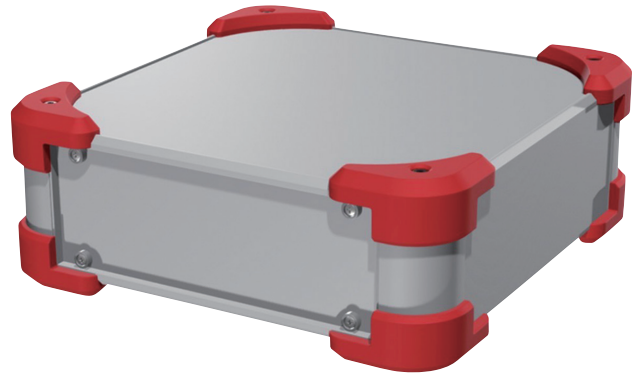S **G** (Silver / Gray)

S **N** (Silver / Navy)

S **R** (Silver / Red)


Product Number

To determine a product number, fill H-W-D dimensions and select Color code in the following blank boxes.

AUGE

-

-

-

H-W-D dimensions

See page 283~286 for dimensions / product no.


Color

SB • SG • SN • SR

Numbering example :
 If looking at "H144.5 x W438 x D308mm, Color type SN"

➔ **AUGE 133-43-30-SN**

Accessories (Optional parts)




Mounting plate AUC series
See page 293 ~ 294



Elastomer carrying handle FM200
See website




Tilt leg TLW series
See page 239



EMC shielding fan filter EMF series
See website

AUGE dimensions

■ DXF/DWG/PDF/STP drawings available on our website.

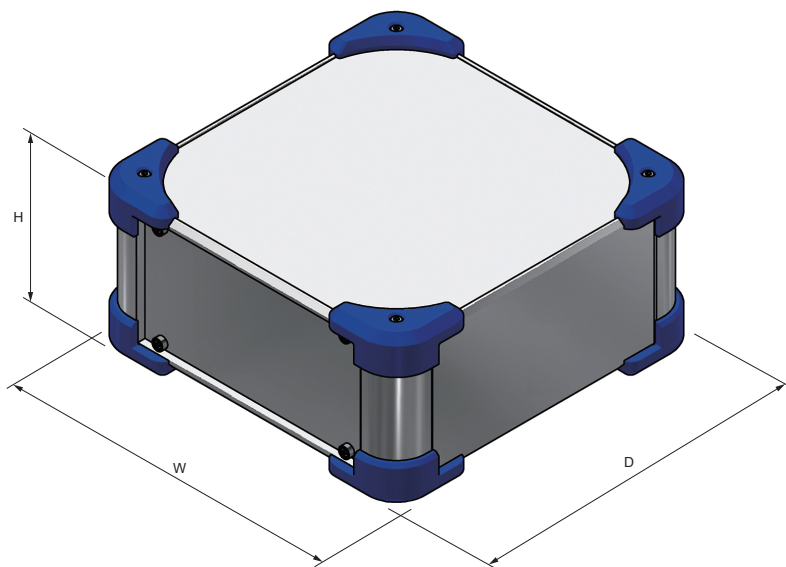

Product no. / Details

■ Please suffix color code at the end of the product number.

Product no.	H	W	D	Weight (kg)
AUGE 66-16-16-□□	78	168	168	0.9
AUGE 66-16-20-□□	78	168	208	1.1
AUGE 66-16-25-□□	78	168	258	1.2
AUGE 66-16-30-□□	78	168	308	1.4
AUGE 66-16-36-□□	78	168	368	1.6
AUGE 66-16-43-□□	78	168	438	1.8
AUGE 66-20-16-□□	78	208	168	1.1
AUGE 66-20-20-□□	78	208	208	1.2
AUGE 66-20-25-□□	78	208	258	1.4
AUGE 66-20-30-□□	78	208	308	1.6
AUGE 66-20-36-□□	78	208	368	1.8
AUGE 66-20-43-□□	78	208	438	2.1
AUGE 66-25-16-□□	78	258	168	1.2
AUGE 66-25-20-□□	78	258	208	1.4
AUGE 66-25-25-□□	78	258	258	1.6
AUGE 66-25-30-□□	78	258	308	1.8
AUGE 66-25-36-□□	78	258	368	2.0
AUGE 66-25-43-□□	78	258	438	2.4
AUGE 66-30-16-□□	78	308	168	1.4
AUGE 66-30-20-□□	78	308	208	1.6
AUGE 66-30-25-□□	78	308	258	1.8
AUGE 66-30-30-□□	78	308	308	2.0

Product no.	H	W	D	Weight (kg)
AUGE 66-30-36-□□	78	308	368	2.3
AUGE 66-30-43-□□	78	308	438	2.7
AUGE 66-30-50-□□	78	308	508	3.0
AUGE 66-36-16-□□	78	368	168	1.6
AUGE 66-36-20-□□	78	368	208	1.8
AUGE 66-36-25-□□	78	368	258	2.1
AUGE 66-36-30-□□	78	368	308	2.3
AUGE 66-36-36-□□	78	368	368	2.6
AUGE 66-36-43-□□	78	368	438	3.0
AUGE 66-36-50-□□	78	368	508	3.4
AUGE 66-43-16-□□	78	438	168	1.8
AUGE 66-43-20-□□	78	438	208	2.1
AUGE 66-43-25-□□	78	438	258	2.4
AUGE 66-43-30-□□	78	438	308	2.7
AUGE 66-43-36-□□	78	438	368	3.0
AUGE 66-43-43-□□	78	438	438	3.5
AUGE 66-43-50-□□	78	438	508	3.9
AUGE 66-50-30-□□	78	508	308	3.0
AUGE 66-50-36-□□	78	508	368	3.4
AUGE 66-50-43-□□	78	508	438	3.9
AUGE 66-50-50-□□	78	508	508	4.4

Product no. / Details

■ Please suffix color code at the end of the product number.

Product no.	H	W	D	Weight (kg)
AUGE 88-16-16-□□	100	168	168	1.0
AUGE 88-16-20-□□	100	168	208	1.2
AUGE 88-16-25-□□	100	168	258	1.4
AUGE 88-16-30-□□	100	168	308	1.5
AUGE 88-16-36-□□	100	168	368	1.8
AUGE 88-16-43-□□	100	168	438	2.0
AUGE 88-20-16-□□	100	208	168	1.2
AUGE 88-20-20-□□	100	208	208	1.3
AUGE 88-20-25-□□	100	208	258	1.5
AUGE 88-20-30-□□	100	208	308	1.7
AUGE 88-20-36-□□	100	208	368	1.9
AUGE 88-20-43-□□	100	208	438	2.2
AUGE 88-25-16-□□	100	258	168	1.4
AUGE 88-25-20-□□	100	258	208	1.5
AUGE 88-25-25-□□	100	258	258	1.7
AUGE 88-25-30-□□	100	258	308	2.0
AUGE 88-25-36-□□	100	258	368	2.2
AUGE 88-25-43-□□	100	258	438	2.6
AUGE 88-30-16-□□	100	308	168	1.5
AUGE 88-30-20-□□	100	308	208	1.7
AUGE 88-30-25-□□	100	308	258	2.0
AUGE 88-30-30-□□	100	308	308	2.2
AUGE 88-30-36-□□	100	308	368	2.5
AUGE 88-30-43-□□	100	308	438	2.9
AUGE 88-30-50-□□	100	308	508	3.2
AUGE 88-36-16-□□	100	368	168	1.8
AUGE 88-36-20-□□	100	368	208	2.0
AUGE 88-36-25-□□	100	368	258	2.2
AUGE 88-36-30-□□	100	368	308	2.5
AUGE 88-36-36-□□	100	368	368	2.8
AUGE 88-36-43-□□	100	368	438	3.3
AUGE 88-36-50-□□	100	368	508	3.7
AUGE 88-43-16-□□	100	438	168	1.9
AUGE 88-43-20-□□	100	438	208	2.3
AUGE 88-43-25-□□	100	438	258	2.6
AUGE 88-43-30-□□	100	438	308	2.9
AUGE 88-43-36-□□	100	438	368	3.3
AUGE 88-43-43-□□	100	438	438	3.7
AUGE 88-43-50-□□	100	438	508	4.2
AUGE 88-50-30-□□	100	508	308	3.2
AUGE 88-50-36-□□	100	508	368	3.7
AUGE 88-50-43-□□	100	508	438	4.2
AUGE 88-50-50-□□	100	508	508	4.7
NEW AUGE 99-16-16-□□	111	168	168	1.0
NEW AUGE 99-16-20-□□	111	168	208	1.2
NEW AUGE 99-16-25-□□	111	168	258	1.4
NEW AUGE 99-16-30-□□	111	168	308	1.5
NEW AUGE 99-16-36-□□	111	168	368	1.7
NEW AUGE 99-16-43-□□	111	168	438	2.0
NEW AUGE 99-20-16-□□	111	208	168	1.2
NEW AUGE 99-20-20-□□	111	208	208	1.3
NEW AUGE 99-20-25-□□	111	208	258	1.5
NEW AUGE 99-20-30-□□	111	208	308	1.7
NEW AUGE 99-20-36-□□	111	208	368	2.0
NEW AUGE 99-20-43-□□	111	208	438	2.2
NEW AUGE 99-25-16-□□	111	258	168	1.4
NEW AUGE 99-25-20-□□	111	258	208	1.5
NEW AUGE 99-25-25-□□	111	258	258	1.8
NEW AUGE 99-25-30-□□	111	258	308	2.0
NEW AUGE 99-25-36-□□	111	258	368	2.3
NEW AUGE 99-25-43-□□	111	258	438	2.6
NEW AUGE 99-30-16-□□	111	308	168	1.5
NEW AUGE 99-30-20-□□	111	308	208	1.7
NEW AUGE 99-30-25-□□	111	308	258	2.0
NEW AUGE 99-30-30-□□	111	308	308	2.2

Product no.	H	W	D	Weight (kg)
NEW AUGE 99-30-36-□□	111	308	368	2.5
NEW AUGE 99-30-43-□□	111	308	438	2.9
NEW AUGE 99-30-50-□□	111	308	508	3.3
NEW AUGE 99-36-16-□□	111	368	168	1.7
NEW AUGE 99-36-20-□□	111	368	208	2.0
NEW AUGE 99-36-25-□□	111	368	258	2.3
NEW AUGE 99-36-30-□□	111	368	308	2.5
NEW AUGE 99-36-36-□□	111	368	368	2.9
NEW AUGE 99-36-43-□□	111	368	438	3.3
NEW AUGE 99-36-50-□□	111	368	508	3.7
NEW AUGE 99-43-16-□□	111	438	168	2.0
NEW AUGE 99-43-20-□□	111	438	208	2.3
NEW AUGE 99-43-25-□□	111	438	258	2.6
NEW AUGE 99-43-30-□□	111	438	308	2.9
NEW AUGE 99-43-36-□□	111	438	368	3.3
NEW AUGE 99-43-43-□□	111	438	438	3.7
NEW AUGE 99-43-50-□□	111	438	508	4.2
NEW AUGE 99-50-30-□□	111	508	308	3.3
NEW AUGE 99-50-36-□□	111	508	368	3.7
NEW AUGE 99-50-43-□□	111	508	438	4.2
NEW AUGE 99-50-50-□□	111	508	508	4.7
NEW AUGE115-16-16-□□	127	168	168	1.1
NEW AUGE115-16-20-□□	127	168	208	1.3
NEW AUGE115-16-25-□□	127	168	258	1.4
NEW AUGE115-16-30-□□	127	168	308	1.6
NEW AUGE115-16-36-□□	127	168	368	1.9
NEW AUGE115-16-43-□□	127	168	438	2.1
NEW AUGE115-20-16-□□	127	208	168	1.3
NEW AUGE115-20-20-□□	127	208	208	1.4
NEW AUGE115-20-25-□□	127	208	258	1.6
NEW AUGE115-20-30-□□	127	208	308	1.8
NEW AUGE115-20-36-□□	127	208	368	2.1
NEW AUGE115-20-43-□□	127	208	438	2.4
NEW AUGE115-25-16-□□	127	258	168	1.4
NEW AUGE115-25-20-□□	127	258	208	1.6
NEW AUGE115-25-25-□□	127	258	258	1.9
NEW AUGE115-25-30-□□	127	258	308	2.1
NEW AUGE115-25-36-□□	127	258	368	2.4
NEW AUGE115-25-43-□□	127	258	438	2.7
NEW AUGE115-30-16-□□	127	308	168	1.6
NEW AUGE115-30-20-□□	127	308	208	1.8
NEW AUGE115-30-25-□□	127	308	258	2.1
NEW AUGE115-30-30-□□	127	308	308	2.4
NEW AUGE115-30-36-□□	127	308	368	2.7
NEW AUGE115-30-43-□□	127	308	438	3.1
NEW AUGE115-30-50-□□	127	308	508	3.4
NEW AUGE115-36-16-□□	127	368	168	1.9
NEW AUGE115-36-20-□□	127	368	208	2.1
NEW AUGE115-36-25-□□	127	368	258	2.4
NEW AUGE115-36-30-□□	127	368	308	2.7
NEW AUGE115-36-36-□□	127	368	368	3.0
NEW AUGE115-36-43-□□	127	368	438	3.5
NEW AUGE115-36-50-□□	127	368	508	3.9
NEW AUGE115-43-16-□□	127	438	168	2.1
NEW AUGE115-43-20-□□	127	438	208	2.4
NEW AUGE115-43-25-□□	127	438	258	2.7
NEW AUGE115-43-30-□□	127	438	308	3.1
NEW AUGE115-43-36-□□	127	438	368	3.5
NEW AUGE115-43-43-□□	127	438	438	3.9
NEW AUGE115-43-50-□□	127	438	508	4.4
NEW AUGE115-50-30-□□	127	508	308	3.4
NEW AUGE115-50-36-□□	127	508	368	3.9
NEW AUGE115-50-43-□□	127	508	438	4.4
NEW AUGE115-50-50-□□	127	508	508	4.9

Product no. / Details

Product no.	H	W	D	Weight (kg)
AUGE133-16-16-□□	144.5	168	168	1.3
AUGE133-16-20-□□	144.5	168	208	1.5
AUGE133-16-25-□□	144.5	168	258	1.7
AUGE133-16-30-□□	144.5	168	308	1.9
AUGE133-16-36-□□	144.5	168	368	2.2
AUGE133-16-43-□□	144.5	168	438	2.4
AUGE133-20-16-□□	144.5	208	168	1.4
AUGE133-20-20-□□	144.5	208	208	1.6
AUGE133-20-25-□□	144.5	208	258	1.9
AUGE133-20-30-□□	144.5	208	308	2.1
AUGE133-20-36-□□	144.5	208	368	2.4
AUGE133-20-43-□□	144.5	208	438	2.8
AUGE133-25-16-□□	144.5	258	168	1.6
AUGE133-25-20-□□	144.5	258	208	1.9
AUGE133-25-25-□□	144.5	258	258	2.1
AUGE133-25-30-□□	144.5	258	308	2.4
AUGE133-25-36-□□	144.5	258	368	2.7
AUGE133-25-43-□□	144.5	258	438	3.1
AUGE133-30-16-□□	144.5	308	168	1.8
AUGE133-30-20-□□	144.5	308	208	2.1
AUGE133-30-25-□□	144.5	308	258	2.4
AUGE133-30-30-□□	144.5	308	308	2.7
AUGE133-30-36-□□	144.5	308	368	3.0
AUGE133-30-43-□□	144.5	308	438	3.4
AUGE133-30-50-□□	144.5	308	508	3.8
AUGE133-36-16-□□	144.5	368	168	2.1
AUGE133-36-20-□□	144.5	368	208	2.3
AUGE133-36-25-□□	144.5	368	258	2.7
AUGE133-36-30-□□	144.5	368	308	3.0
AUGE133-36-36-□□	144.5	368	368	3.4
AUGE133-36-43-□□	144.5	368	438	3.9
AUGE133-36-50-□□	144.5	368	508	4.3
AUGE133-43-16-□□	144.5	438	168	2.4
AUGE133-43-20-□□	144.5	438	208	2.7
AUGE133-43-25-□□	144.5	438	258	3.0
AUGE133-43-30-□□	144.5	438	308	3.4
AUGE133-43-36-□□	144.5	438	368	3.8
AUGE133-43-43-□□	144.5	438	438	4.3
AUGE133-43-50-□□	144.5	438	508	4.9
AUGE133-50-30-□□	144.5	508	308	3.8
AUGE133-50-36-□□	144.5	508	368	4.3
AUGE133-50-43-□□	144.5	508	438	4.8
AUGE133-50-50-□□	144.5	508	508	5.4
NEW AUGE149-16-16-□□	161	168	168	1.3
NEW AUGE149-16-20-□□	161	168	208	1.5
NEW AUGE149-16-25-□□	161	168	258	1.7
NEW AUGE149-16-30-□□	161	168	308	2.0
NEW AUGE149-16-36-□□	161	168	368	2.2
NEW AUGE149-16-43-□□	161	168	438	2.5
NEW AUGE149-20-16-□□	161	208	168	1.5
NEW AUGE149-20-20-□□	161	208	208	1.7
NEW AUGE149-20-25-□□	161	208	258	1.9
NEW AUGE149-20-30-□□	161	208	308	2.2
NEW AUGE149-20-36-□□	161	208	368	2.5
NEW AUGE149-20-43-□□	161	208	438	2.8
NEW AUGE149-25-16-□□	161	258	168	1.7
NEW AUGE149-25-20-□□	161	258	208	1.9
NEW AUGE149-25-25-□□	161	258	258	2.2
NEW AUGE149-25-30-□□	161	258	308	2.5
NEW AUGE149-25-36-□□	161	258	368	2.8
NEW AUGE149-25-43-□□	161	258	438	3.2
NEW AUGE149-30-16-□□	161	308	168	1.9
NEW AUGE149-30-20-□□	161	308	208	2.1
NEW AUGE149-30-25-□□	161	308	258	2.4
NEW AUGE149-30-30-□□	161	308	308	2.7

■ Please suffix color code at the end of the product number.

Product no.	H	W	D	Weight (kg)
NEW AUGE149-30-36-□□	161	308	368	3.1
NEW AUGE149-30-43-□□	161	308	438	3.5
NEW AUGE149-30-50-□□	161	308	508	4.0
NEW AUGE149-36-16-□□	161	368	168	2.1
NEW AUGE149-36-20-□□	161	368	208	2.4
NEW AUGE149-36-25-□□	161	368	258	2.7
NEW AUGE149-36-30-□□	161	368	308	3.1
NEW AUGE149-36-36-□□	161	368	368	3.5
NEW AUGE149-36-43-□□	161	368	438	4.0
NEW AUGE149-36-50-□□	161	368	508	4.4
NEW AUGE149-43-16-□□	161	438	168	2.4
NEW AUGE149-43-20-□□	161	438	208	2.7
NEW AUGE149-43-25-□□	161	438	258	3.1
NEW AUGE149-43-30-□□	161	438	308	3.5
NEW AUGE149-43-36-□□	161	438	368	3.9
NEW AUGE149-43-43-□□	161	438	438	4.5
NEW AUGE149-43-50-□□	161	438	508	5.0
NEW AUGE149-50-30-□□	161	508	308	3.9
NEW AUGE149-50-36-□□	161	508	368	4.4
NEW AUGE149-50-43-□□	161	508	438	4.9
NEW AUGE149-50-50-□□	161	508	508	5.5
AUGE177-16-16-□□	189	168	168	1.5
AUGE177-16-20-□□	189	168	208	1.7
AUGE177-16-25-□□	189	168	258	1.9
AUGE177-16-30-□□	189	168	308	2.2
AUGE177-16-36-□□	189	168	368	2.5
AUGE177-16-43-□□	189	168	438	2.8
AUGE177-20-16-□□	189	208	168	1.6
AUGE177-20-20-□□	189	208	208	1.9
AUGE177-20-25-□□	189	208	258	2.1
AUGE177-20-30-□□	189	208	308	2.4
AUGE177-20-36-□□	189	208	368	2.7
AUGE177-20-43-□□	189	208	438	3.1
AUGE177-25-16-□□	189	258	168	1.9
AUGE177-25-20-□□	189	258	208	2.1
AUGE177-25-25-□□	189	258	258	2.4
AUGE177-25-30-□□	189	258	308	2.7
AUGE177-25-36-□□	189	258	368	3.1
AUGE177-25-43-□□	189	258	438	3.5
AUGE177-30-16-□□	189	308	168	2.1
AUGE177-30-20-□□	189	308	208	2.3
AUGE177-30-25-□□	189	308	258	2.7
AUGE177-30-30-□□	189	308	308	3.0
AUGE177-30-36-□□	189	308	368	3.4
AUGE177-30-43-□□	189	308	438	3.8
AUGE177-30-50-□□	189	308	508	4.3
AUGE177-36-16-□□	189	368	168	2.3
AUGE177-36-20-□□	189	368	208	2.6
AUGE177-36-25-□□	189	368	258	3.0
AUGE177-36-30-□□	189	368	308	3.3
AUGE177-36-36-□□	189	368	368	3.8
AUGE177-36-43-□□	189	368	438	4.3
AUGE177-36-50-□□	189	368	508	4.8
AUGE177-43-16-□□	189	438	168	2.7
AUGE177-43-20-□□	189	438	208	3.0
AUGE177-43-25-□□	189	438	258	3.4
AUGE177-43-30-□□	189	438	308	3.8
AUGE177-43-36-□□	189	438	368	4.2
AUGE177-43-43-□□	189	438	438	4.8
AUGE177-43-50-□□	189	438	508	5.4
AUGE177-50-30-□□	189	508	308	4.2
AUGE177-50-36-□□	189	508	368	4.7
AUGE177-50-43-□□	189	508	438	5.3
AUGE177-50-50-□□	189	508	508	5.9

Product no. / Details


■ Please suffix color code at the end of the product number.

Product no.	H	W	D	Weight (kg)
NEW AUGE222-16-16-□□	233.5	168	168	1.7
NEW AUGE222-16-20-□□	233.5	168	208	1.9
NEW AUGE222-16-25-□□	233.5	168	258	2.2
NEW AUGE222-16-30-□□	233.5	168	308	2.5
NEW AUGE222-16-36-□□	233.5	168	368	2.8
NEW AUGE222-16-43-□□	233.5	168	438	3.3
NEW AUGE222-20-16-□□	233.5	208	168	1.9
NEW AUGE222-20-20-□□	233.5	208	208	2.1
NEW AUGE222-20-25-□□	233.5	208	258	2.5
NEW AUGE222-20-30-□□	233.5	208	308	2.8
NEW AUGE222-20-36-□□	233.5	208	368	3.1
NEW AUGE222-20-43-□□	233.5	208	438	3.6
NEW AUGE222-25-16-□□	233.5	258	168	2.1
NEW AUGE222-25-20-□□	233.5	258	208	2.4
NEW AUGE222-25-25-□□	233.5	258	258	2.7
NEW AUGE222-25-30-□□	233.5	258	308	3.1
NEW AUGE222-25-36-□□	233.5	258	368	3.5
NEW AUGE222-25-43-□□	233.5	258	438	4.0
NEW AUGE222-30-16-□□	233.5	308	168	2.4
NEW AUGE222-30-20-□□	233.5	308	208	2.7
NEW AUGE222-30-25-□□	233.5	308	258	3.0
NEW AUGE222-30-30-□□	233.5	308	308	3.4
NEW AUGE222-30-36-□□	233.5	308	368	3.8
NEW AUGE222-30-43-□□	233.5	308	438	4.3
NEW AUGE222-30-50-□□	233.5	308	508	4.9
NEW AUGE222-36-16-□□	233.5	368	168	2.7
NEW AUGE222-36-20-□□	233.5	368	208	3.0
NEW AUGE222-36-25-□□	233.5	368	258	3.4
NEW AUGE222-36-30-□□	233.5	368	308	3.8
NEW AUGE222-36-36-□□	233.5	368	368	4.3
NEW AUGE222-36-43-□□	233.5	368	438	4.8
NEW AUGE222-36-50-□□	233.5	368	508	5.4
NEW AUGE222-43-16-□□	233.5	438	168	3.0
NEW AUGE222-43-20-□□	233.5	438	208	3.4
NEW AUGE222-43-25-□□	233.5	438	258	3.8
NEW AUGE222-43-30-□□	233.5	438	308	4.2
NEW AUGE222-43-36-□□	233.5	438	368	4.8
NEW AUGE222-43-43-□□	233.5	438	438	5.4
NEW AUGE222-43-50-□□	233.5	438	508	6.0
NEW AUGE222-50-30-□□	233.5	508	308	4.7
NEW AUGE222-50-36-□□	233.5	508	368	5.3
NEW AUGE222-50-43-□□	233.5	508	438	5.9
NEW AUGE222-50-50-□□	233.5	508	508	6.6

Product no.	H	W	D	Weight (kg)
NEW AUGE266-16-16-□□	277.9	168	168	2.0
NEW AUGE266-16-20-□□	277.9	168	208	2.3
NEW AUGE266-16-25-□□	277.9	168	258	2.6
NEW AUGE266-16-30-□□	277.9	168	308	3.0
NEW AUGE266-16-36-□□	277.9	168	368	3.4
NEW AUGE266-16-43-□□	277.9	168	438	3.9
NEW AUGE266-20-16-□□	277.9	208	168	2.2
NEW AUGE266-20-20-□□	277.9	208	208	2.5
NEW AUGE266-20-25-□□	277.9	208	258	2.9
NEW AUGE266-20-30-□□	277.9	208	308	3.3
NEW AUGE266-20-36-□□	277.9	208	368	3.7
NEW AUGE266-20-43-□□	277.9	208	438	4.3
NEW AUGE266-25-16-□□	277.9	258	168	2.5
NEW AUGE266-25-20-□□	277.9	258	208	2.8
NEW AUGE266-25-25-□□	277.9	258	258	3.2
NEW AUGE266-25-30-□□	277.9	258	308	3.6
NEW AUGE266-25-36-□□	277.9	258	368	4.1
NEW AUGE266-25-43-□□	277.9	258	438	4.7
NEW AUGE266-30-16-□□	277.9	308	168	2.8
NEW AUGE266-30-20-□□	277.9	308	208	3.1
NEW AUGE266-30-25-□□	277.9	308	258	3.5
NEW AUGE266-30-30-□□	277.9	308	308	4.0
NEW AUGE266-30-36-□□	277.9	308	368	4.5
NEW AUGE266-30-43-□□	277.9	308	438	5.1
NEW AUGE266-30-50-□□	277.9	308	508	5.7
NEW AUGE266-36-16-□□	277.9	368	168	3.1
NEW AUGE266-36-20-□□	277.9	368	208	3.4
NEW AUGE266-36-25-□□	277.9	368	258	3.9
NEW AUGE266-36-30-□□	277.9	368	308	4.4
NEW AUGE266-36-36-□□	277.9	368	368	4.9
NEW AUGE266-36-43-□□	277.9	368	438	5.6
NEW AUGE266-36-50-□□	277.9	368	508	6.2
NEW AUGE266-43-16-□□	277.9	438	168	3.5
NEW AUGE266-43-20-□□	277.9	438	208	3.9
NEW AUGE266-43-25-□□	277.9	438	258	4.4
NEW AUGE266-43-30-□□	277.9	438	308	4.9
NEW AUGE266-43-36-□□	277.9	438	368	5.5
NEW AUGE266-43-43-□□	277.9	438	438	6.2
NEW AUGE266-43-50-□□	277.9	438	508	6.9
NEW AUGE266-50-30-□□	277.9	508	308	5.3
NEW AUGE266-50-36-□□	277.9	508	368	6.0
NEW AUGE266-50-43-□□	277.9	508	438	6.8
NEW AUGE266-50-50-□□	277.9	508	508	7.5



- Elegantly designed aluminium enclosure with front/rear panels.
- A large selection of 430 different sizes to choose from.
- Top/bottom covers and front/rear panels are made from easily customizable sheet aluminium material.
- Versatile aluminium enclosure suitable for use as measuring instrument, controller, industrial embedded computer, power supply, audio amplifier, and more.
- Feet is selectable from adhesive rubber and aluminium types.

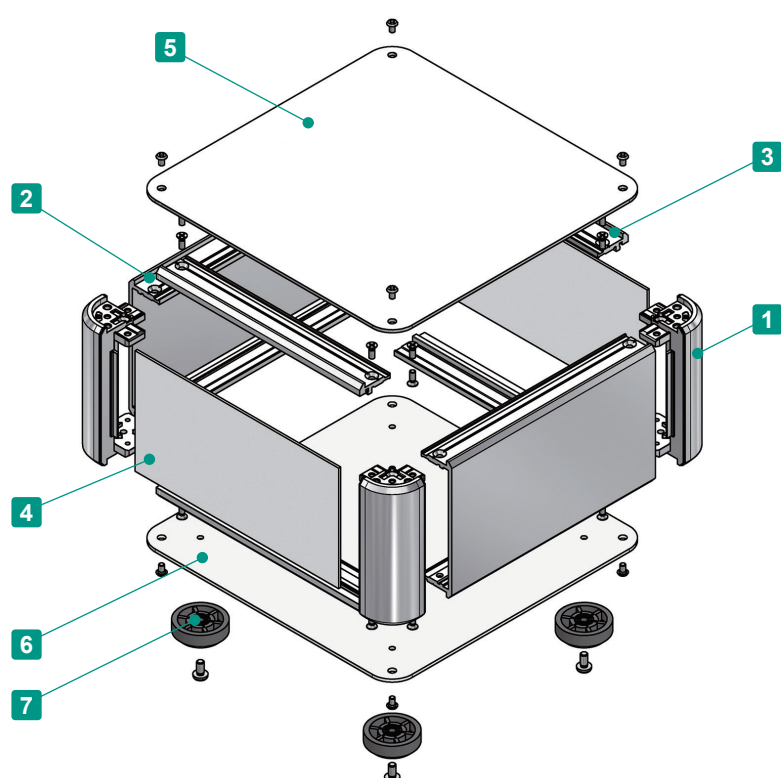


Included screws

- Top / Bottom cover
M3-5 original trapezoid head (plus / hex) &
Nickel plated / Black trivalent chromate x 8~16 pcs
- Frame / Panel support frame
M3-8 flat head & Nickel plated x 16 pcs
- Rubber feet / Aluminium feet
M4-8 blind head & Black trivalent chromate x 4 pcs

Recommended torque : $0.3 \sim 0.6 \text{ N} \cdot \text{m}$

* Recommended torque listed is for reference only; actual may differ.
Assemble after testing torque.

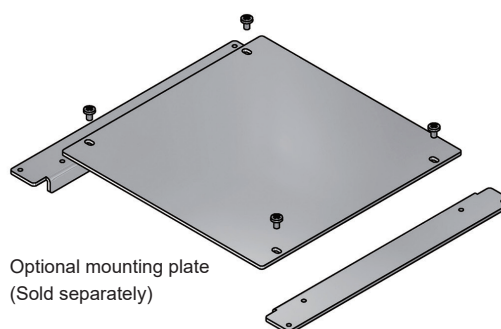

Optional mounting plate
(Sold separately)

Components

No.	Part name	Pcs	Material	Color / Finish
1	Corner block	4	Diecast aluminium ADC12	Silver • Black / Painted (Unfinished inside)
2	Frame	2	Extruded aluminium A6063S-T5	Silver • Black / Anodized with clear coating
3	Panel support frame	4	Extruded aluminium A6063S-T5	Silver • Black / Anodized with clear coating
4	Panel	2	Aluminium A1100P	Silver • Black / Anodized
5	Top cover	1	Aluminium A1100P	Silver • Black / Anodized
6	Bottom cover	1	Aluminium A1100P	Silver • Black / Anodized
7	Rubber feet : Aluminium feet	4	TPE (Elastomer) : Aluminium	Black : Silver • Black / Anodized

To select Feet, Screw, and Color, follow steps **1** ~ **3** to determine product number.


1 Feet

*Color of "Aluminium Feet" will be the same as bottom cover color.


2 Screw

*Color of screw will be the same as top • bottom cover color.

R Rubber (Black)




A Aluminium (Silver / Anodized) (Black / Anodized)



P Plus (Silver / Nickel plated) (Black / Black trivalent chromate)



H Hex (Silver / Nickel plated) (Black / Black trivalent chromate)



Hex wrench included.

3 Color

Please choose from the color combinations listed below.

S S



S B



B S



B B



Product Number

To determine a product number, fill H-W-D dimensions and select Feet, Screw, and Color code in the following blank boxes.

AU

- -

H-W-D dimensions

-

1 Feet **2 Screw**

3 Color

See page 245~248 for dimensions and product no.

R or A

P or H


SS • SB • BS • BB

Numbering example :


If looking at "H88 x W300 x D200mm, Feet type A, Screw type H, Color type BS"

➔ **AU 88-30-20 AH-BS**

Accessories (Optional parts)



Mounting plate AUC series
See page 293 ~ 294



Corner guard AUCG series
See page 294




Elastomer carrying handle FM200
See website



Tilt leg TLW series
See page 239


AU dimensions

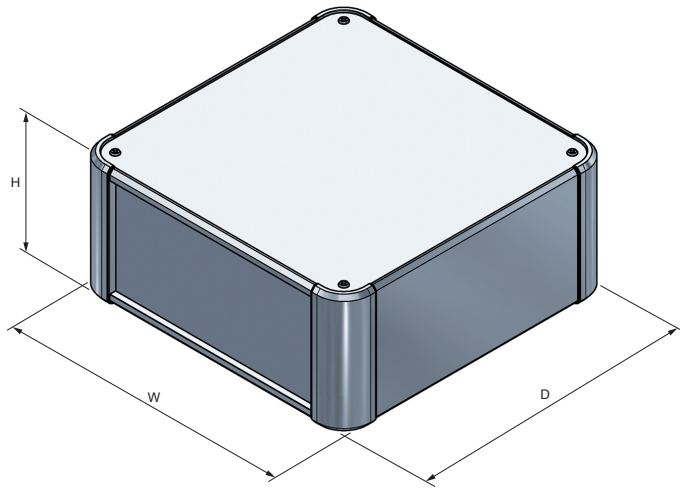


■ DXF/DWG/PDF/STP drawings available on our website.

■ Feet is selectable from rubber and aluminium types.
※Rubber and aluminium feet height are different.

Rubber Feet



Aluminium Feet



Product no. / Details

■ Please suffix color code at the end of the product number.

Product no.	H	W	D	Weight (kg)
AU 44-16-16□□-□□	44	160	160	0.7
AU 44-16-20□□-□□	44	160	200	0.8
AU 44-16-25□□-□□	44	160	250	1.0
AU 44-16-30□□-□□	44	160	300	1.1
AU 44-16-36□□-□□	44	160	360	1.3
AU 44-16-43□□-□□	44	160	430	1.5
AU 44-20-16□□-□□	44	200	160	0.8
AU 44-20-20□□-□□	44	200	200	0.9
AU 44-20-25□□-□□	44	200	250	1.1
AU 44-20-30□□-□□	44	200	300	1.3
AU 44-20-36□□-□□	44	200	360	1.5
AU 44-20-43□□-□□	44	200	430	1.7
AU 44-25-16□□-□□	44	250	160	1.0
AU 44-25-20□□-□□	44	250	200	1.1
AU 44-25-25□□-□□	44	250	250	1.3
AU 44-25-30□□-□□	44	250	300	1.5
AU 44-25-36□□-□□	44	250	360	1.7
AU 44-25-43□□-□□	44	250	430	2.0
AU 44-30-16□□-□□	44	300	160	1.1
AU 44-30-20□□-□□	44	300	200	1.3
AU 44-30-25□□-□□	44	300	250	1.5
AU 44-30-30□□-□□	44	300	300	1.7
AU 44-30-36□□-□□	44	300	360	2.0
AU 44-30-43□□-□□	44	300	430	2.3
AU 44-30-50□□-□□	44	300	500	2.6
AU 44-36-16□□-□□	44	360	160	1.3
AU 44-36-20□□-□□	44	360	200	1.5
AU 44-36-25□□-□□	44	360	250	1.7
AU 44-36-30□□-□□	44	360	300	2.0
AU 44-36-36□□-□□	44	360	360	2.2
AU 44-36-43□□-□□	44	360	430	2.6
AU 44-36-50□□-□□	44	360	500	3.0
AU 44-43-16□□-□□	44	430	160	1.5
AU 44-43-20□□-□□	44	430	200	1.7
AU 44-43-25□□-□□	44	430	250	2.0
AU 44-43-30□□-□□	44	430	300	2.3
AU 44-43-36□□-□□	44	430	360	2.6
AU 44-43-43□□-□□	44	430	430	3.0
AU 44-43-50□□-□□	44	430	500	3.4
AU 44-50-30□□-□□	44	500	300	2.6
AU 44-50-36□□-□□	44	500	360	3.0
AU 44-50-43□□-□□	44	500	430	3.4
AU 44-50-50□□-□□	44	500	500	3.9

Product no.	H	W	D	Weight (kg)
AU 66-16-16□□-□□	66	160	160	0.9
AU 66-16-20□□-□□	66	160	200	1.0
AU 66-16-25□□-□□	66	160	250	1.2
AU 66-16-30□□-□□	66	160	300	1.3
AU 66-16-36□□-□□	66	160	360	1.5
AU 66-16-43□□-□□	66	160	430	1.7
AU 66-20-16□□-□□	66	200	160	1.0
AU 66-20-20□□-□□	66	200	200	1.1
AU 66-20-25□□-□□	66	200	250	1.3
AU 66-20-30□□-□□	66	200	300	1.5
AU 66-20-36□□-□□	66	200	360	1.7
AU 66-20-43□□-□□	66	200	430	2.0
AU 66-25-16□□-□□	66	250	160	1.1
AU 66-25-20□□-□□	66	250	200	1.3
AU 66-25-25□□-□□	66	250	250	1.5
AU 66-25-30□□-□□	66	250	300	1.7
AU 66-25-36□□-□□	66	250	360	2.0
AU 66-25-43□□-□□	66	250	430	2.3
AU 66-30-16□□-□□	66	300	160	1.3
AU 66-30-20□□-□□	66	300	200	1.5
AU 66-30-25□□-□□	66	300	250	1.7
AU 66-30-30□□-□□	66	300	300	1.9
AU 66-30-36□□-□□	66	300	360	2.2
AU 66-30-43□□-□□	66	300	430	2.6
AU 66-30-50□□-□□	66	300	500	2.9
AU 66-36-16□□-□□	66	360	160	1.5
AU 66-36-20□□-□□	66	360	200	1.7
AU 66-36-25□□-□□	66	360	250	1.9
AU 66-36-30□□-□□	66	360	300	2.2
AU 66-36-36□□-□□	66	360	360	2.5
AU 66-36-43□□-□□	66	360	430	2.9
AU 66-36-50□□-□□	66	360	500	3.3
AU 66-43-16□□-□□	66	430	160	1.7
AU 66-43-20□□-□□	66	430	200	1.9
AU 66-43-25□□-□□	66	430	250	2.2
AU 66-43-30□□-□□	66	430	300	2.5
AU 66-43-36□□-□□	66	430	360	2.9
AU 66-43-43□□-□□	66	430	430	3.3
AU 66-43-50□□-□□	66	430	500	3.7
AU 66-50-30□□-□□	66	500	300	2.8
AU 66-50-36□□-□□	66	500	360	3.3
AU 66-50-43□□-□□	66	500	430	3.7
AU 66-50-50□□-□□	66	500	500	4.2

Product no. / Details

■ Please suffix color code at the end of the product number.

Product no.	H	W	D	Weight (kg)
AU 88-16-16□□-□□	88	160	160	0.9
AU 88-16-20□□-□□	88	160	200	1.1
AU 88-16-25□□-□□	88	160	250	1.3
AU 88-16-30□□-□□	88	160	300	1.4
AU 88-16-36□□-□□	88	160	360	1.7
AU 88-16-43□□-□□	88	160	430	1.9
AU 88-20-16□□-□□	88	200	160	1.1
AU 88-20-20□□-□□	88	200	200	1.2
AU 88-20-25□□-□□	88	200	250	1.4
AU 88-20-30□□-□□	88	200	300	1.6
AU 88-20-36□□-□□	88	200	360	1.8
AU 88-20-43□□-□□	88	200	430	2.1
AU 88-25-16□□-□□	88	250	160	1.2
AU 88-25-20□□-□□	88	250	200	1.4
AU 88-25-25□□-□□	88	250	250	1.6
AU 88-25-30□□-□□	88	250	300	1.8
AU 88-25-36□□-□□	88	250	360	2.1
AU 88-25-43□□-□□	88	250	430	2.4
AU 88-30-16□□-□□	88	300	160	1.4
AU 88-30-20□□-□□	88	300	200	1.6
AU 88-30-25□□-□□	88	300	250	1.8
AU 88-30-30□□-□□	88	300	300	2.1
AU 88-30-36□□-□□	88	300	360	2.4
AU 88-30-43□□-□□	88	300	430	2.7
AU 88-30-50□□-□□	88	300	500	3.1
AU 88-36-16□□-□□	88	360	160	1.6
AU 88-36-20□□-□□	88	360	200	1.8
AU 88-36-25□□-□□	88	360	250	2.1
AU 88-36-30□□-□□	88	360	300	2.3
AU 88-36-36□□-□□	88	360	360	2.7
AU 88-36-43□□-□□	88	360	430	3.1
AU 88-36-50□□-□□	88	360	500	3.5
AU 88-43-16□□-□□	88	430	160	1.8
AU 88-43-20□□-□□	88	430	200	2.1
AU 88-43-25□□-□□	88	430	250	2.4
AU 88-43-30□□-□□	88	430	300	2.7
AU 88-43-36□□-□□	88	430	360	3.1
AU 88-43-43□□-□□	88	430	430	3.5
AU 88-43-50□□-□□	88	430	500	4.0
AU 88-50-30□□-□□	88	500	300	3.0
AU 88-50-36□□-□□	88	500	360	3.4
AU 88-50-43□□-□□	88	500	430	3.9
AU 88-50-50□□-□□	88	500	500	4.4
NEW AU 99-16-16□□-□□	99	160	160	1.0
NEW AU 99-16-20□□-□□	99	160	200	1.1
NEW AU 99-16-25□□-□□	99	160	250	1.3
NEW AU 99-16-30□□-□□	99	160	300	1.4
NEW AU 99-16-36□□-□□	99	160	360	1.7
NEW AU 99-16-43□□-□□	99	160	430	1.9
NEW AU 99-20-16□□-□□	99	200	160	1.1
NEW AU 99-20-20□□-□□	99	200	200	1.2
NEW AU 99-20-25□□-□□	99	200	250	1.4
NEW AU 99-20-30□□-□□	99	200	300	1.6
NEW AU 99-20-36□□-□□	99	200	360	1.9
NEW AU 99-20-43□□-□□	99	200	430	2.2
NEW AU 99-25-16□□-□□	99	250	160	1.2
NEW AU 99-25-20□□-□□	99	250	200	1.4
NEW AU 99-25-25□□-□□	99	250	250	1.6
NEW AU 99-25-30□□-□□	99	250	300	1.9
NEW AU 99-25-36□□-□□	99	250	360	2.1
NEW AU 99-25-43□□-□□	99	250	430	2.5
NEW AU 99-30-16□□-□□	99	300	160	1.4
NEW AU 99-30-20□□-□□	99	300	200	1.6
NEW AU 99-30-25□□-□□	99	300	250	1.9
NEW AU 99-30-30□□-□□	99	300	300	2.1

Product no.	H	W	D	Weight (kg)
NEW AU 99-30-36□□-□□	99	300	360	2.4
NEW AU 99-30-43□□-□□	99	300	430	2.8
NEW AU 99-30-50□□-□□	99	300	500	3.1
NEW AU 99-36-16□□-□□	99	360	160	1.6
NEW AU 99-36-20□□-□□	99	360	200	1.8
NEW AU 99-36-25□□-□□	99	360	250	2.1
NEW AU 99-36-30□□-□□	99	360	300	2.4
NEW AU 99-36-36□□-□□	99	360	360	2.7
NEW AU 99-36-43□□-□□	99	360	430	3.2
NEW AU 99-36-50□□-□□	99	360	500	3.6
NEW AU 99-43-16□□-□□	99	430	160	1.8
NEW AU 99-43-20□□-□□	99	430	200	2.1
NEW AU 99-43-25□□-□□	99	430	250	2.4
NEW AU 99-43-30□□-□□	99	430	300	2.7
NEW AU 99-43-36□□-□□	99	430	360	3.1
NEW AU 99-43-43□□-□□	99	430	430	3.6
NEW AU 99-43-50□□-□□	99	430	500	4.0
NEW AU 99-50-30□□-□□	99	500	300	3.1
NEW AU 99-50-36□□-□□	99	500	360	3.5
NEW AU 99-50-43□□-□□	99	500	430	4.0
NEW AU 99-50-50□□-□□	99	500	500	4.5
NEW AU115-16-16□□-□□	115	160	160	1.0
NEW AU115-16-20□□-□□	115	160	200	1.2
NEW AU115-16-25□□-□□	115	160	250	1.4
NEW AU115-16-30□□-□□	115	160	300	1.5
NEW AU115-16-36□□-□□	115	160	360	1.8
NEW AU115-16-43□□-□□	115	160	430	2.1
NEW AU115-20-16□□-□□	115	200	160	1.2
NEW AU115-20-20□□-□□	115	200	200	1.3
NEW AU115-20-25□□-□□	115	200	250	1.5
NEW AU115-20-30□□-□□	115	200	300	1.7
NEW AU115-20-36□□-□□	115	200	360	2.0
NEW AU115-20-43□□-□□	115	200	430	2.3
NEW AU115-25-16□□-□□	115	250	160	1.3
NEW AU115-25-20□□-□□	115	250	200	1.5
NEW AU115-25-25□□-□□	115	250	250	1.7
NEW AU115-25-30□□-□□	115	250	300	2.0
NEW AU115-25-36□□-□□	115	250	360	2.3
NEW AU115-25-43□□-□□	115	250	430	2.6
NEW AU115-30-16□□-□□	115	300	160	1.5
NEW AU115-30-20□□-□□	115	300	200	1.7
NEW AU115-30-25□□-□□	115	300	250	2.0
NEW AU115-30-30□□-□□	115	300	300	2.2
NEW AU115-30-36□□-□□	115	300	360	2.5
NEW AU115-30-43□□-□□	115	300	430	2.9
NEW AU115-30-50□□-□□	115	300	500	3.3
NEW AU115-36-16□□-□□	115	360	160	1.7
NEW AU115-36-20□□-□□	115	360	200	1.9
NEW AU115-36-25□□-□□	115	360	250	2.2
NEW AU115-36-30□□-□□	115	360	300	2.5
NEW AU115-36-36□□-□□	115	360	360	2.9
NEW AU115-36-43□□-□□	115	360	430	3.3
NEW AU115-36-50□□-□□	115	360	500	3.7
NEW AU115-43-16□□-□□	115	430	160	2.0
NEW AU115-43-20□□-□□	115	430	200	2.2
NEW AU115-43-25□□-□□	115	430	250	2.6
NEW AU115-43-30□□-□□	115	430	300	2.9
NEW AU115-43-36□□-□□	115	430	360	3.3
NEW AU115-43-43□□-□□	115	430	430	3.8
NEW AU115-43-50□□-□□	115	430	500	4.2
NEW AU115-50-30□□-□□	115	500	300	3.2
NEW AU115-50-36□□-□□	115	500	360	3.7
NEW AU115-50-43□□-□□	115	500	430	4.2
NEW AU115-50-50□□-□□	115	500	500	4.7

Product no. / Details

Product no.	H	W	D	Weight (kg)
AU133-16-16□□-□□	132.5	160	160	1.2
AU133-16-20□□-□□	132.5	160	200	1.4
AU133-16-25□□-□□	132.5	160	250	1.6
AU133-16-30□□-□□	132.5	160	300	1.8
AU133-16-36□□-□□	132.5	160	360	2.1
AU133-16-43□□-□□	132.5	160	430	2.4
AU133-20-16□□-□□	132.5	200	160	1.3
AU133-20-20□□-□□	132.5	200	200	1.5
AU133-20-25□□-□□	132.5	200	250	1.7
AU133-20-30□□-□□	132.5	200	300	2.0
AU133-20-36□□-□□	132.5	200	360	2.3
AU133-20-43□□-□□	132.5	200	430	2.6
AU133-25-16□□-□□	132.5	250	160	1.5
AU133-25-20□□-□□	132.5	250	200	1.7
AU133-25-25□□-□□	132.5	250	250	2.0
AU133-25-30□□-□□	132.5	250	300	2.2
AU133-25-36□□-□□	132.5	250	360	2.6
AU133-25-43□□-□□	132.5	250	430	3.0
AU133-30-16□□-□□	132.5	300	160	1.7
AU133-30-20□□-□□	132.5	300	200	1.9
AU133-30-25□□-□□	132.5	300	250	2.2
AU133-30-30□□-□□	132.5	300	300	2.5
AU133-30-36□□-□□	132.5	300	360	2.8
AU133-30-43□□-□□	132.5	300	430	3.3
AU133-30-50□□-□□	132.5	300	500	3.7
AU133-36-16□□-□□	132.5	360	160	1.9
AU133-36-20□□-□□	132.5	360	200	2.1
AU133-36-25□□-□□	132.5	360	250	2.5
AU133-36-30□□-□□	132.5	360	300	2.8
AU133-36-36□□-□□	132.5	360	360	3.2
AU133-36-43□□-□□	132.5	360	430	3.7
AU133-36-50□□-□□	132.5	360	500	4.1
AU133-43-16□□-□□	132.5	430	160	2.2
AU133-43-20□□-□□	132.5	430	200	2.4
AU133-43-25□□-□□	132.5	430	250	2.8
AU133-43-30□□-□□	132.5	430	300	3.2
AU133-43-36□□-□□	132.5	430	360	3.6
AU133-43-43□□-□□	132.5	430	430	4.1
AU133-43-50□□-□□	132.5	430	500	4.6
AU133-50-30□□-□□	132.5	500	300	3.5
AU133-50-36□□-□□	132.5	500	360	4.0
AU133-50-43□□-□□	132.5	500	430	4.6
AU133-50-50□□-□□	132.5	500	500	5.1
NEW AU149-16-16□□-□□	149	160	160	1.2
NEW AU149-16-20□□-□□	149	160	200	1.4
NEW AU149-16-25□□-□□	149	160	250	1.6
NEW AU149-16-30□□-□□	149	160	300	1.9
NEW AU149-16-36□□-□□	149	160	360	2.1
NEW AU149-16-43□□-□□	149	160	430	2.5
NEW AU149-20-16□□-□□	149	200	160	1.4
NEW AU149-20-20□□-□□	149	200	200	1.6
NEW AU149-20-25□□-□□	149	200	250	1.8
NEW AU149-20-30□□-□□	149	200	300	2.1
NEW AU149-20-36□□-□□	149	200	360	2.4
NEW AU149-20-43□□-□□	149	200	430	2.7
NEW AU149-25-16□□-□□	149	250	160	1.5
NEW AU149-25-20□□-□□	149	250	200	1.8
NEW AU149-25-25□□-□□	149	250	250	2.0
NEW AU149-25-30□□-□□	149	250	300	2.3
NEW AU149-25-36□□-□□	149	250	360	2.7
NEW AU149-25-43□□-□□	149	250	430	3.1
NEW AU149-30-16□□-□□	149	300	160	1.7
NEW AU149-30-20□□-□□	149	300	200	2.0
NEW AU149-30-25□□-□□	149	300	250	2.3
NEW AU149-30-30□□-□□	149	300	300	2.6

■ Please suffix color code at the end of the product number.



Product no.	H	W	D	Weight (kg)
NEW AU149-30-36□□-□□	149	300	360	2.9
NEW AU149-30-43□□-□□	149	300	430	3.4
NEW AU149-30-50□□-□□	149	300	500	3.8
NEW AU149-36-16□□-□□	149	360	160	1.9
NEW AU149-36-20□□-□□	149	360	200	2.2
NEW AU149-36-25□□-□□	149	360	250	2.5
NEW AU149-36-30□□-□□	149	360	300	2.9
NEW AU149-36-36□□-□□	149	360	360	3.3
NEW AU149-36-43□□-□□	149	360	430	3.8
NEW AU149-36-50□□-□□	149	360	500	4.3
NEW AU149-43-16□□-□□	149	430	160	2.2
NEW AU149-43-20□□-□□	149	430	200	2.5
NEW AU149-43-25□□-□□	149	430	250	2.9
NEW AU149-43-30□□-□□	149	430	300	3.3
NEW AU149-43-36□□-□□	149	430	360	3.7
NEW AU149-43-43□□-□□	149	430	430	4.2
NEW AU149-43-50□□-□□	149	430	500	4.8
NEW AU149-50-30□□-□□	149	500	300	3.6
NEW AU149-50-36□□-□□	149	500	360	4.1
NEW AU149-50-43□□-□□	149	500	430	4.7
NEW AU149-50-50□□-□□	149	500	500	5.3
AU177-16-16□□-□□	177	160	160	1.4
AU177-16-20□□-□□	177	160	200	1.6
AU177-16-25□□-□□	177	160	250	1.8
AU177-16-30□□-□□	177	160	300	2.1
AU177-16-36□□-□□	177	160	360	2.4
AU177-16-43□□-□□	177	160	430	2.7
AU177-20-16□□-□□	177	200	160	1.5
AU177-20-20□□-□□	177	200	200	1.7
AU177-20-25□□-□□	177	200	250	2.0
AU177-20-30□□-□□	177	200	300	2.3
AU177-20-36□□-□□	177	200	360	2.6
AU177-20-43□□-□□	177	200	430	3.0
AU177-25-16□□-□□	177	250	160	1.7
AU177-25-20□□-□□	177	250	200	1.9
AU177-25-25□□-□□	177	250	250	2.2
AU177-25-30□□-□□	177	250	300	2.5
AU177-25-36□□-□□	177	250	360	2.9
AU177-25-43□□-□□	177	250	430	3.3
AU177-30-16□□-□□	177	300	160	1.9
AU177-30-20□□-□□	177	300	200	2.2
AU177-30-25□□-□□	177	300	250	2.5
AU177-30-30□□-□□	177	300	300	2.8
AU177-30-36□□-□□	177	300	360	3.2
AU177-30-43□□-□□	177	300	430	3.7
AU177-30-50□□-□□	177	300	500	4.1
AU177-36-16□□-□□	177	360	160	2.1
AU177-36-20□□-□□	177	360	200	2.4
AU177-36-25□□-□□	177	360	250	2.8
AU177-36-30□□-□□	177	360	300	3.1
AU177-36-36□□-□□	177	360	360	3.6
AU177-36-43□□-□□	177	360	430	4.1
AU177-36-50□□-□□	177	360	500	4.6
AU177-43-16□□-□□	177	430	160	2.4
AU177-43-20□□-□□	177	430	200	2.7
AU177-43-25□□-□□	177	430	250	3.1
AU177-43-30□□-□□	177	430	300	3.5
AU177-43-36□□-□□	177	430	360	4.0
AU177-43-43□□-□□	177	430	430	4.6
AU177-43-50□□-□□	177	430	500	5.1
AU177-50-30□□-□□	177	500	300	3.9
AU177-50-36□□-□□	177	500	360	4.4
AU177-50-43□□-□□	177	500	430	5.0
AU177-50-50□□-□□	177	500	500	5.6

Product no. / Details

■ Please suffix color code at the end of the product number.

Product no.	H	W	D	Weight (kg)
NEW AU222-16-16□□-□□	221.5	161	161	1.6
NEW AU222-16-20□□-□□	221.5	161	201	1.8
NEW AU222-16-25□□-□□	221.5	161	251	2.1
NEW AU222-16-30□□-□□	221.5	161	301	2.4
NEW AU222-16-36□□-□□	221.5	161	361	2.7
NEW AU222-16-43□□-□□	221.5	161	431	3.2
NEW AU222-20-16□□-□□	221.5	201	161	1.8
NEW AU222-20-20□□-□□	221.5	201	201	2.0
NEW AU222-20-25□□-□□	221.5	201	251	2.3
NEW AU222-20-30□□-□□	221.5	201	301	2.6
NEW AU222-20-36□□-□□	221.5	201	361	3.0
NEW AU222-20-43□□-□□	221.5	201	431	3.4
NEW AU222-25-16□□-□□	221.5	251	161	2.0
NEW AU222-25-20□□-□□	221.5	251	201	2.2
NEW AU222-25-25□□-□□	221.5	251	251	2.6
NEW AU222-25-30□□-□□	221.5	251	301	2.9
NEW AU222-25-36□□-□□	221.5	251	361	3.3
NEW AU222-25-43□□-□□	221.5	251	431	3.8
NEW AU222-30-16□□-□□	221.5	301	161	2.2
NEW AU222-30-20□□-□□	221.5	301	201	2.5
NEW AU222-30-25□□-□□	221.5	301	251	2.8
NEW AU222-30-30□□-□□	221.5	301	301	3.2
NEW AU222-30-36□□-□□	221.5	301	361	3.6
NEW AU222-30-43□□-□□	221.5	301	431	4.2
NEW AU222-30-50□□-□□	221.5	301	501	4.7
NEW AU222-36-16□□-□□	221.5	361	161	2.4
NEW AU222-36-20□□-□□	221.5	361	201	2.7
NEW AU222-36-25□□-□□	221.5	361	251	3.1
NEW AU222-36-30□□-□□	221.5	361	301	3.5
NEW AU222-36-36□□-□□	221.5	361	361	4.0
NEW AU222-36-43□□-□□	221.5	361	431	4.6
NEW AU222-36-50□□-□□	221.5	361	501	5.1
NEW AU222-43-16□□-□□	221.5	431	161	2.7
NEW AU222-43-20□□-□□	221.5	431	201	3.1
NEW AU222-43-25□□-□□	221.5	431	251	3.5
NEW AU222-43-30□□-□□	221.5	431	301	4.0
NEW AU222-43-36□□-□□	221.5	431	361	4.5
NEW AU222-43-43□□-□□	221.5	431	431	5.1
NEW AU222-43-50□□-□□	221.5	431	501	5.7
NEW AU222-50-30□□-□□	221.5	501	301	4.4
NEW AU222-50-36□□-□□	221.5	501	361	4.9
NEW AU222-50-43□□-□□	221.5	501	431	5.6
NEW AU222-50-50□□-□□	221.5	501	501	6.2

Product no.	H	W	D	Weight (kg)
NEW AU266-16-16□□-□□	265.9	161	161	1.9
NEW AU266-16-20□□-□□	265.9	161	201	2.2
NEW AU266-16-25□□-□□	265.9	161	251	2.5
NEW AU266-16-30□□-□□	265.9	161	301	2.9
NEW AU266-16-36□□-□□	265.9	161	361	3.3
NEW AU266-16-43□□-□□	265.9	161	431	3.8
NEW AU266-20-16□□-□□	265.9	201	161	2.1
NEW AU266-20-20□□-□□	265.9	201	201	2.4
NEW AU266-20-25□□-□□	265.9	201	251	2.7
NEW AU266-20-30□□-□□	265.9	201	301	3.1
NEW AU266-20-36□□-□□	265.9	201	361	3.6
NEW AU266-20-43□□-□□	265.9	201	431	4.1
NEW AU266-25-16□□-□□	265.9	251	161	2.3
NEW AU266-25-20□□-□□	265.9	251	201	2.6
NEW AU266-25-25□□-□□	265.9	251	251	3.0
NEW AU266-25-30□□-□□	265.9	251	301	3.4
NEW AU266-25-36□□-□□	265.9	251	361	3.9
NEW AU266-25-43□□-□□	265.9	251	431	4.5
NEW AU266-30-16□□-□□	265.9	301	161	2.5
NEW AU266-30-20□□-□□	265.9	301	201	2.9
NEW AU266-30-25□□-□□	265.9	301	251	3.3
NEW AU266-30-30□□-□□	265.9	301	301	3.7
NEW AU266-30-36□□-□□	265.9	301	361	4.2
NEW AU266-30-43□□-□□	265.9	301	431	4.9
NEW AU266-30-50□□-□□	265.9	301	501	5.5
NEW AU266-36-16□□-□□	265.9	361	161	2.8
NEW AU266-36-20□□-□□	265.9	361	201	3.2
NEW AU266-36-25□□-□□	265.9	361	251	3.6
NEW AU266-36-30□□-□□	265.9	361	301	4.1
NEW AU266-36-36□□-□□	265.9	361	361	4.6
NEW AU266-36-43□□-□□	265.9	361	431	5.3
NEW AU266-36-50□□-□□	265.9	361	501	6.0
NEW AU266-43-16□□-□□	265.9	431	161	3.1
NEW AU266-43-20□□-□□	265.9	431	201	3.5
NEW AU266-43-25□□-□□	265.9	431	251	4.0
NEW AU266-43-30□□-□□	265.9	431	301	4.5
NEW AU266-43-36□□-□□	265.9	431	361	5.1
NEW AU266-43-43□□-□□	265.9	431	431	5.8
NEW AU266-43-50□□-□□	265.9	431	501	6.6
NEW AU266-50-30□□-□□	265.9	501	301	5.0
NEW AU266-50-36□□-□□	265.9	501	361	5.6
NEW AU266-50-43□□-□□	265.9	501	431	6.4
NEW AU266-50-50□□-□□	265.9	501	501	7.1

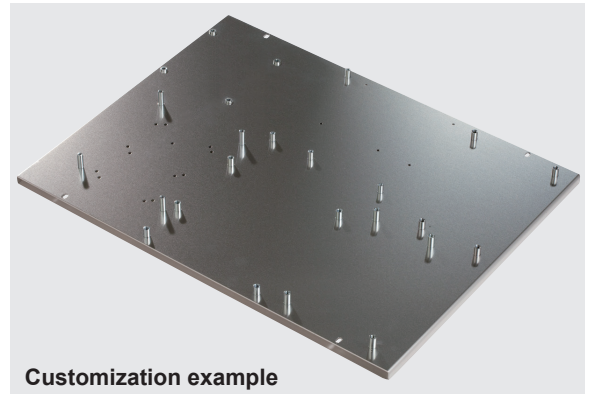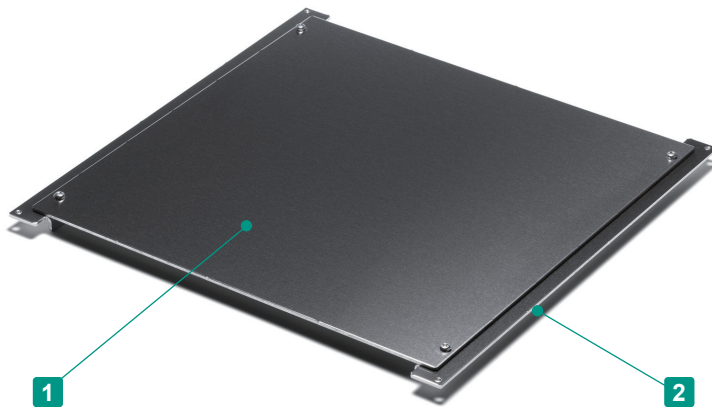AUC series**MOUNTING PLATE for AU□ series****Customization example**

■ See page CUSTOM-9 ~ CUSTOM-11 and our website for further details.



■ Mounting plate for AUR, AUPR, AUPRE, AUXR, AUXRE, AUGH, AUG, AUGÉ, AU, AUP, AUPE, AUX, and AUXÉ series.

Components

No.	Part name	Pcs	Material	Finish
1	Mounting plate	1	Aluminium A1050P t=2.0	Unfinished
2	L-bracket	2	Aluminium A1050P t=2.0	Unfinished

Included screw :

- Corner block M3 flat head : Nickel plated x 4
- Mounting plate M3-5 pan head : Trivalent chromate x 4

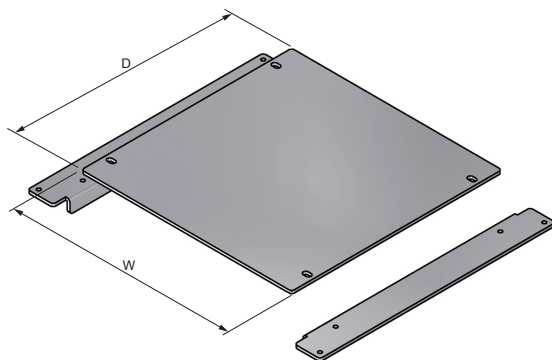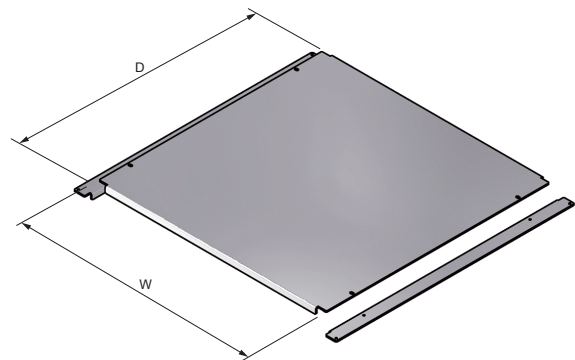AUC dimensions**Non-reinforced (N) type****Reinforced (Y) type**

■ DXF/DWG/PDF/STP drawings available on our website.

Product no. / Details

Product no.	W	D	Enclosure W x D	Reinforcement	Weight (g)	Product no.	W	D	Enclosure W x D	Reinforcement	Weight (g)
AUC16-16	108	108	160×160	N	102	AUC30-43	248	378	300×430	N	626
AUC16-20	108	148	160×200	N	138	AUC30-50	248	448	300×500	N	741
AUC16-25	108	198	160×250	N	181	AUC36-16	308	108	360×160	N	219
AUC16-30	108	248	160×300	N	226	AUC36-20	308	148	360×200	N	297
AUC16-36	108	308	160×360	N	279	AUC36-25	308	198	360×250	N	395
AUC16-43	108	378	160×430	N	340	AUC36-30	308	248	360×300	N	494
AUC20-16	148	108	200×160	N	126	AUC36-36	308	308	360×360	N	581
AUC20-20	148	148	200×200	N	170	AUC36-43	308	378	360×430	N	749
AUC20-25	148	198	200×250	N	224	AUC36-50	308	448	360×500	N	886
AUC20-30	148	248	200×300	N	279	AUC43-16	378	108	430×160	Y	287
AUC20-36	148	308	200×360	N	345	AUC43-20	378	148	430×200	Y	353
AUC20-43	148	378	200×430	N	422	AUC43-25	378	198	430×250	Y	470
AUC25-16	198	108	250×160	N	155	AUC43-30	378	248	430×300	Y	587
AUC25-20	198	148	250×200	N	210	AUC43-36	378	308	430×360	Y	728
AUC25-25	198	198	250×250	N	278	AUC43-43	378	378	430×430	Y	918
AUC25-30	198	248	250×300	N	346	AUC43-50	378	448	430×500	Y	1,082
AUC25-36	198	308	250×360	N	428	AUC50-30	448	248	500×300	Y	681
AUC25-43	198	378	250×430	N	524	AUC50-36	448	308	500×360	Y	814
AUC30-16	248	108	300×160	N	184	AUC50-43	448	378	500×430	Y	1,061
AUC30-20	248	148	300×200	N	249	AUC50-50	448	448	500×500	Y	1,257
AUC30-25	248	198	300×250	N	331	AUC60-36	548	308	600×360	Y	1,021
AUC30-30	248	248	300×300	N	413	AUC60-43	548	378	600×430	Y	1,279
AUC30-36	248	308	300×360	N	512						

How to install AUC mounting plate

1. Install L-bracket onto countersunk screw hole on corner block.

2. Install mounting plate onto L-bracket with screws.




AUCG series

CORNER GUARD for AU□ series



AUCG dimensions

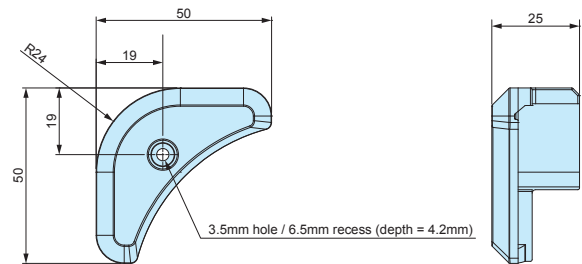

■ DXF/DWG/PDF drawings available on our website.

- Spare corner guard for AUGH, AUG and AUGE series. AUCG corner guard can also be installed on AU, AUP, AUPE, AUX, and AUXE series enclosures.
- 4 colors available: Black, Gray, Navy, and Red. Retailed as a pack of 8pcs.

Product no. / Details

Product no.				Weight (g)	Pack of
● Black	● Gray	● Navy	● Red		
AUCG-1B	AUCG-1G	AUCG-1N	AUCG-1R	9.5	8


AEG-1000

EMC SHIELDING GASKET for AU□ series



- Spare EMC shielding gasket for AUPRE, AUXRE, AUGE, AUPE, and AUXE series enclosures. Installation on AUP and ARPR series is possible to allow it to be EMC shielded.

Cross section view

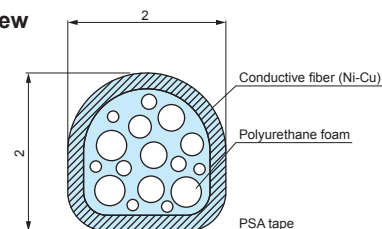

Product no. / Details

Product no.	Material	Color	Sales unit
AEG-1000	Conductive fiber UL94V-0	Metallic gray	1000mm x 1 pc

FM200 series

ELASTOMER CARRYING HANDLE




- Comfortable and easy to grip elastomer handle.

Product no. / Details

Product no.	
● Black	● Gray
FM200B	FM200G

Technical Data

Max load : 20kg

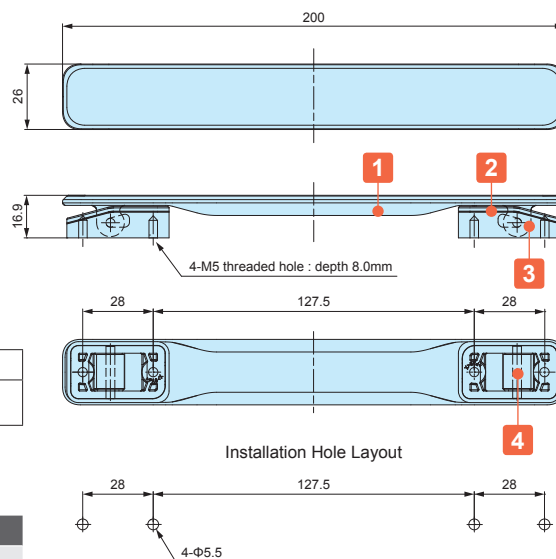

Components

No.	Part name	Pcs	Material	Color / Finish
1	Grip	1	PU	Black • Gray
2	Base	2	PA6	Black • Gray
3	Base cover	2	ABS	Black • Gray
4	Shaft	2	SWCH	Nickel plated
-	Self-tapping screw (Pan head M5-8)	4	Steel	Trivalent chromate

MH series


CARRYING HANDLE



- If chemicals, cutting fluid, etc. adhered to, or come into contact with areas where tensile stress is generated, there is a possibility that cracks may develop due to the synergistic effect of the chemicals and stress.

Technical Data

Max load : 20kg

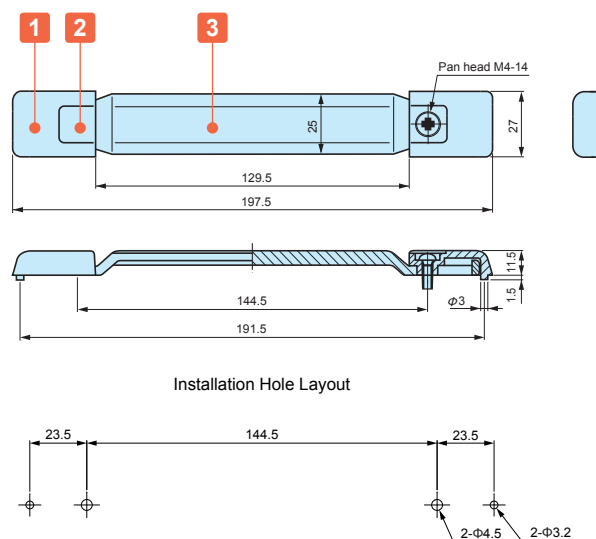

Components

No.	Part name	Pcs	Material	Color / Finish
1	Holder	2	PC + ABS • ABS	Gray • Black
2	Blind cap	2	PP + Elastomer • Elastomer	Gray • Black
3	Grip	1	PP + Elastomer • Elastomer	Gray • Black
-	Screw (Pan head M4-14)	2	Steel	Trivalent chromate
-	Nut (M4)	2	Steel	Trivalent chromate
-	Spring washer	2	Steel	Trivalent chromate

Product no. / Details

Product no.	
● Black	● Gray
MH-197B	MH-197G

TLW series**TILT LEG**

APPLICATION EXAMPLE

- Double shot injection molded feet with soft and well-designed rounded shape.
- Non-slip design with Elastomer (TPE) pad.
- Available in 3 different color patterns (2 color patterns for TLW-70 models).
- TLW-70E models are exclusively for use with width 185mm or larger bottom covers of EXP • EXPE • EXW • EX • EXH • EXHE aluminium enclosures.

Technical Data


Max load : 7kg

Components




No.	Part name	Pcs	Material	Color / Finish
1	Front foot	2	PC + ABS UL94V-0 • TPE	Black & Black • Navy & Gray • Light gray & Gray
2	Rear foot	2	PC + ABS UL94V-0 • TPE	Black & Black • Navy & Gray • Light gray & Gray
-	Screw	4	Steel M3-8 pan head	Black trivalent chromate
-	Nut	4	Steel M3	Black trivalent chromate

TLW dimensions

Mounting hole (Front)



Mounting hole (Rear)




1

2

- DXF/DWG/PDF/STP drawings available on our website.

- TLW-70E□□ models are for installation (with M3 nut) into the built-in grooves on bottom-covers of EXP • EXPE 20-6, EXH • EXHE • EX 19-4 or larger models.

- Hole milling is required to install TLW-46□□ and TLW-70□□ models.
- Max installation panel thickness : t = 3.5mm

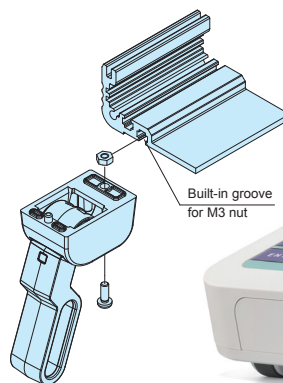


Built-in groove for M3 nut

**Product no. / Details**

Product no.	A	B	C	D	E	F	G	H	I	J	K	L	Color (plastic)	Color (TPE)	Weight (g)
TLW-46BB	19	19	12	51.2	45.9	2	14	13	19	27	14	2	Black	Black	23
TLW-46NG	19	19	12	51.2	45.9	2	14	13	19	27	14	2	Navy	Gray	23
TLW-46LG	19	19	12	51.2	45.9	2	14	13	19	27	14	2	Light gray	Gray	23
TLW-70EBB	-	25	16	75.4	69	3	21.5	-	25	39	21.5	3	Black	Black	59
TLW-70ENG	-	25	16	75.4	69	3	21.5	-	25	39	21.5	3	Navy	Gray	59
TLW-70ELG	-	25	16	75.4	69	3	21.5	-	25	39	21.5	3	Light gray	Gray	59
TLW-70BB	30	25	16	75.4	69	2	21.5	20	25	39	21.5	2	Black	Black	59
TLW-70LG	30	25	16	75.4	69	2	21.5	20	25	39	21.5	2	Light gray	Gray	59

MAR series**WALL MOUNT SUPPORT ARM**

- Wall mount support arm move easily to the preferred positions.
- Suitable for command panel on machinery and touch panel controller. Easy installation onto the wall as well.
- Hole pitch on the monitor bracket is compatible with VESA mount standards. Possible to mount PC display without modification.

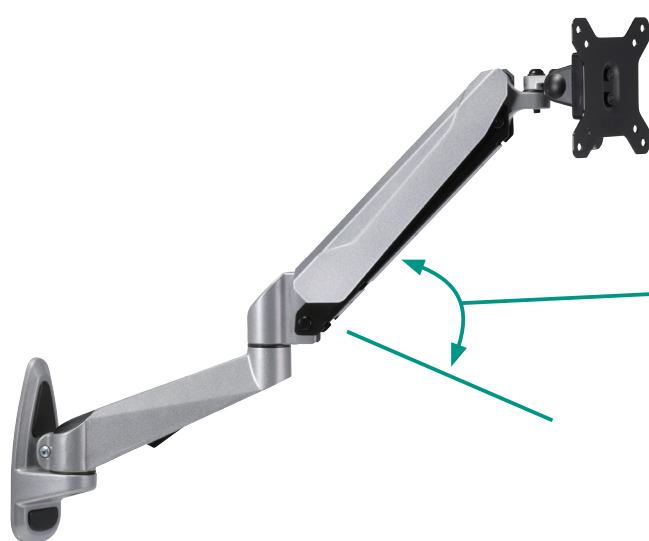MAR specifications**MAR-312W**

Adjustable bolt for up/down direction on arm is firmly set initially.
Adjust the movement according to the installed device.

Arm can move in up/down direction.


Arm full length ~ 612mm

Max load : 6.5kg (including product weight, adjustable bolt firmly locked)


Material : Steel • Plastic • Aluminium diecast

*Wall mounting screws included.


Pan-Tilt bracket dimensions



Wall mounting bracket dimensions




MAR-111W

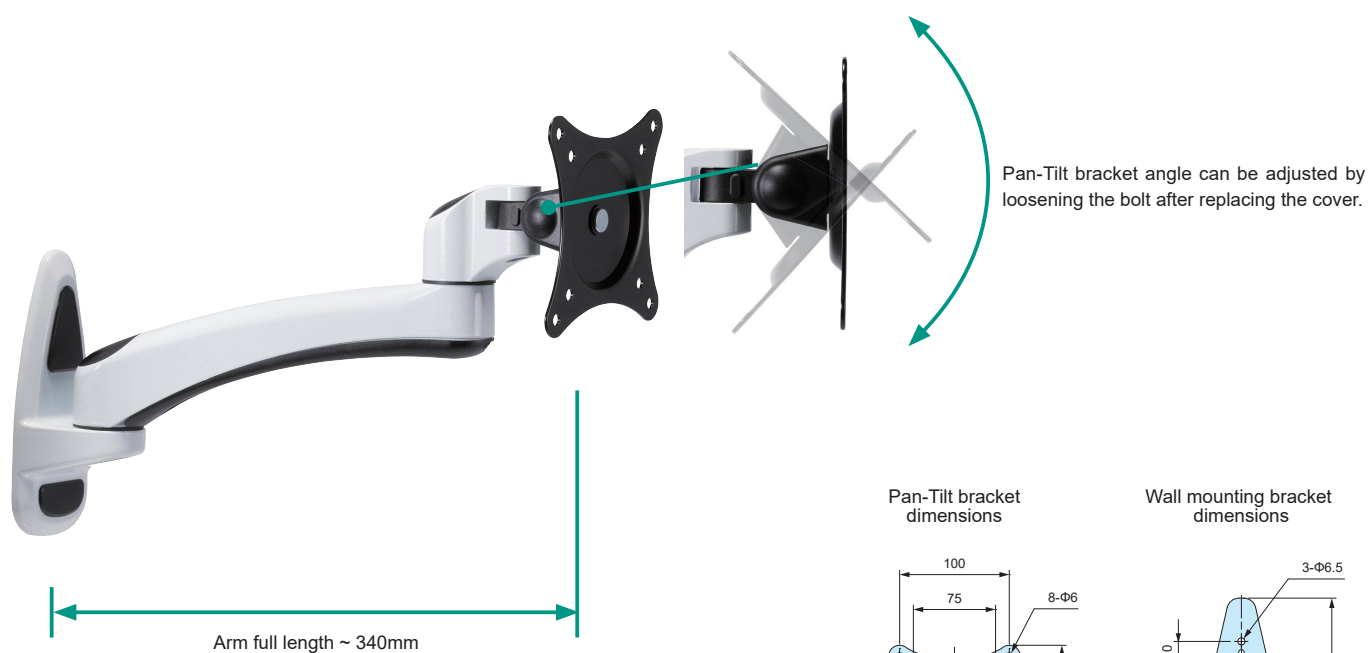


Max load : 8kg (including product weight)
 Material : Steel • Plastic • Aluminium diecast
 *Wall mounting screws included.

Pan-Tilt bracket dimensions



Wall mounting bracket dimensions




MAR-110W




*Pan-Tilt bracket does not move in up/down direction.

Pan-Tilt bracket dimensions

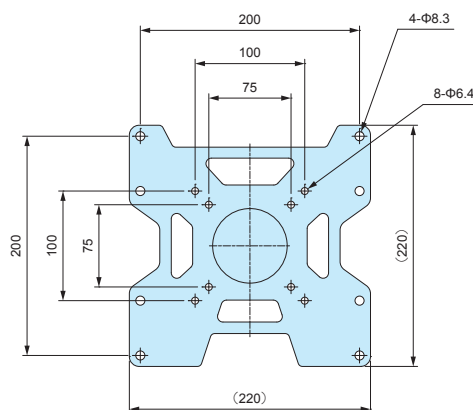

Wall mounting bracket dimensions



Max load : 8kg (including product weight)
 Material : Steel • Plastic • Aluminium diecast
 *Wall mounting screws included.

Product no. / Details

Product no.	Arm full length	Arm color	Weight (kg)
MAR-312W	~ 612mm	Metallic gray	2.2
MAR-111W	~ 340mm	White / Black	1.0
MAR-110W	~ 143mm	White / Black	1.0