


**CVP-M** series

**METAL VENTILATION PLUG**

Pressure Equalization / Ventilation


IP68

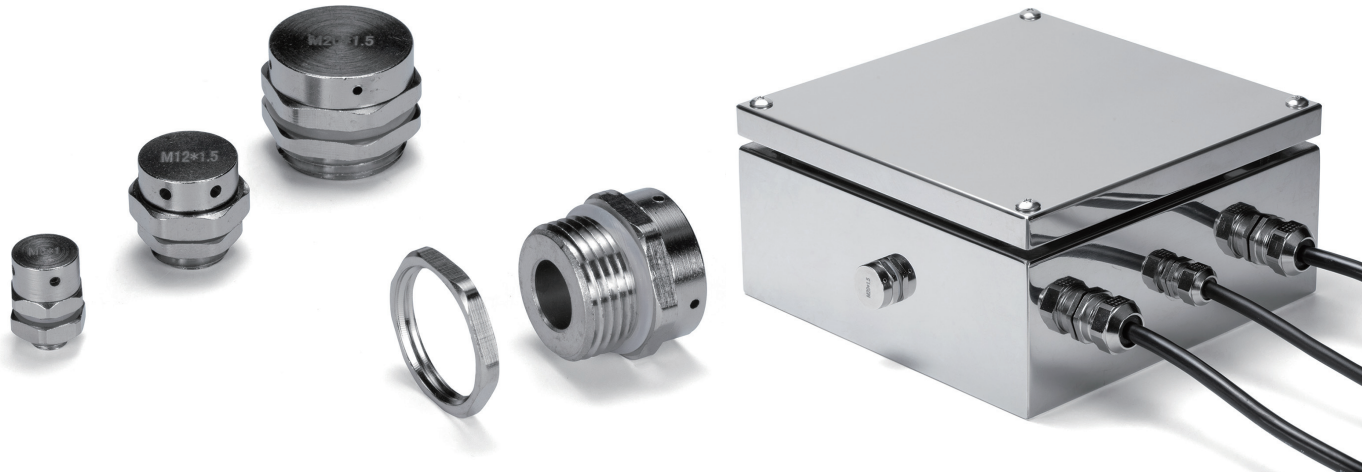

- High durability yet highly affordable economical metal ventilation plug.
- IP68 protection class rated (water depth 2 meters / 60 mins)
- Ventilation plug protects the enclosure from deformation by equalizing internal and external pressure differences, as well as venting the gas generated within the enclosure.
- Recommended to be installed at the sides of the enclosure.

**CVP-M dimensions**

■ DXF/DWG/PDF drawings available on our website.

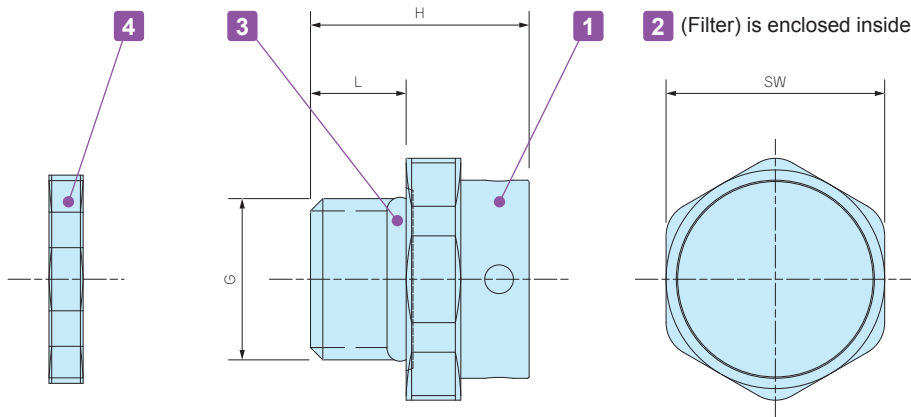

**Components**

■ PA = Polyamide

No.	Part name	Material
1	Housing	Brass / Nickel plated
2	Filter	PTFE
3	O-ring	Silicone
4	Lock nut	Brass / Nickel plated

**Technical Data**

Product no.	CVP-6M	CVP-12M	CVP-20M
Airflow	400ml / min (dp = 7kPa)	1200ml / min (dp = 7kPa)	1600ml / min (dp = 7kPa)
Certification	IP68 (1hours / 2m-depth)		
Operating temperature	-40°C ~ +100°C		

■ Airflow value listed is for reference only; check under actual usage conditions.

**Product no. / Details**

Product no.	G		SW	H	L	Weight (g)
	Thread size	Mount hole				
● Silver CVP- 6M	M 6 × P1	Φ 6.2	10	15	7	6.2
CVP-12M	M12 × P1.5	Φ12.2	16	16	7	14
CVP-20M	M20 × P1.5	Φ20.2	22	18.9	10	40.2