



TAKACHI ELECTRONICS ENCLOSURE CO., LTD.

3-21-16 Higashi-ryoke, Kawaguchi-shi, Saitama, 332-0003 JAPAN

Tel. +81-48-222-5409 / Fax. +81-48-222-7652

January 30, 2023

Updated on June 30, 2023

NOTICE

Material, Color, and Color Code Change

Affected series and changes:

■ **Material Change :**

MY series

Holder : PC + ABS → ABS

Grip + Blind Cap : PP + Elastomer → Elastomer

■ **Color Change :**

MS, MO, MSN, MON, MSY, MOY, MSR, MOR, MN, MY, MSM series

■ **Color Code Change :**

MS, MO, MSN, MON, MSY, MOY, MSR, MOR series

Click below illustrations to check **Current (Old)** and **New** colors on your browser.

Current (Old) Color Code : G

New Color Code : GS

**MS • MO
series**




**MN • MO
series**



**MSN • MON
series**

MN series
Tip-Up Handle

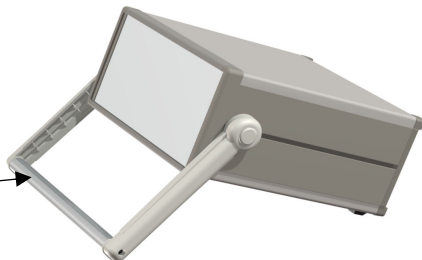


**MSN • MON
series**



**MSY • MOY
series**

MY series
Carrying Handle

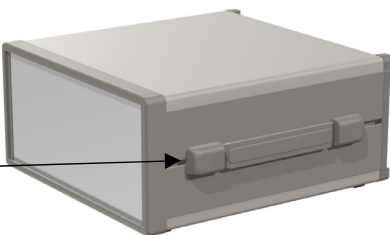

**MSY • MOY
series**



**MSR • MOR
series**

MSM series
Rack Mount Bracket



**MSR • MOR
series**



■ **Functionality:** No changes to functionality, size / dimensions, or finish.


■ **Purpose:** To ensure consistent quality throughout via streamlined supply chain and materials.

■ **Period:** 2023 July → **2023 September (Updated on June 30, 2023)**

■ **No changes to pricing.**


Thank you for your understanding.

For more information, kindly contact us at: sales@takachi-el.co.jp

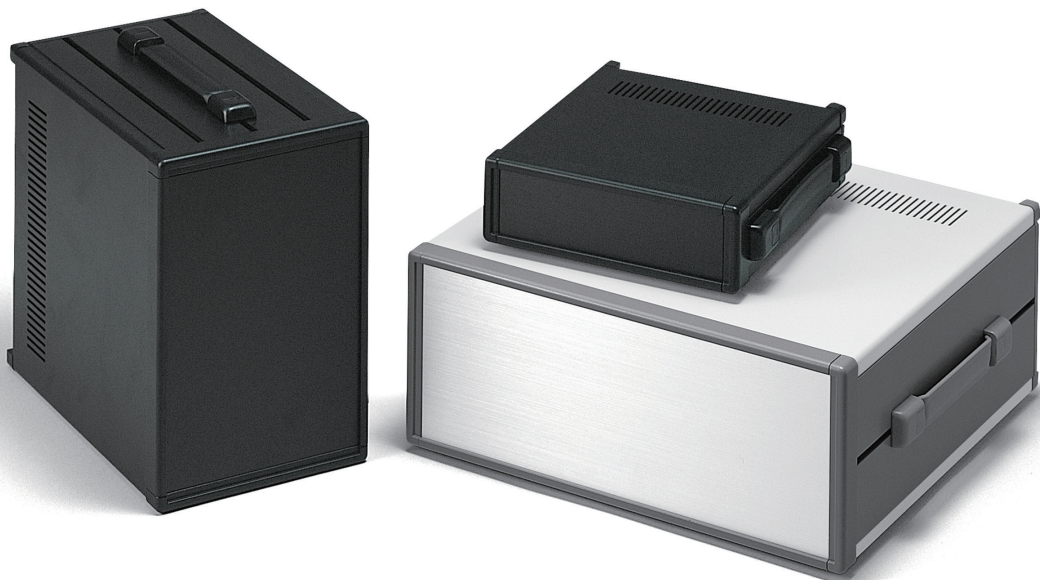

- Available in 3 different colors and 160 different sizes.
- Maximum load support of 20kg.

Assembly drawings

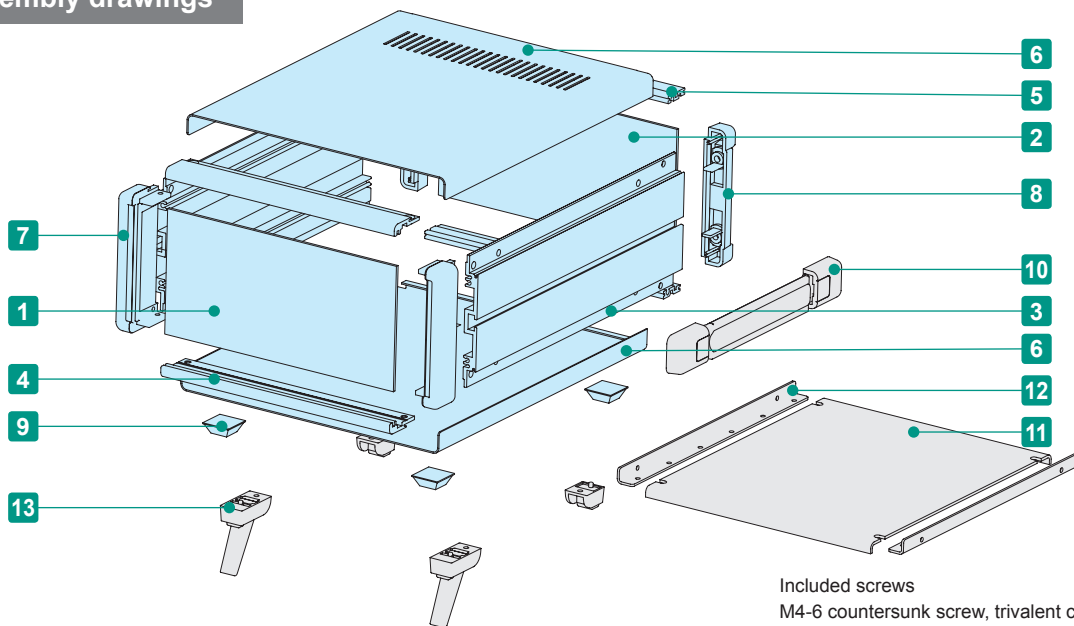


Included screws
 M4-6 countersunk screw, trivalent chromate x 4 pcs
 M4-8 Pan head screw, trivalent chromate x 8 pcs
 M4-10 Binding head screw, black trivalent chromate x 4 pcs

Components

No.	Part name	Pcs	Material	Color / Finish
1	Front panel	1	Aluminium A1050P t=2.0	Silver • Black / Hairline brushed & Anodized
2	Rear panel	1	Aluminium A1050P t=2.0	Silver • Black / Anodized
3	Side frame	2	Extruded aluminium A6063S-T5	Gray • Black / Painted
4	Front frame	2	Extruded aluminium A6063S-T5	Gray • Black / Painted
5	Rear frame	2	Extruded aluminium A6063S-T5	Silver / Anodized
6	Top • Bottom cover	1 each	Steel SPCC t=1.0	Light gray • Black / Painted
7	Corner block	2	Diecast aluminium ADC12	Gray • Black / Painted
8	Rear feet	2	ABS UL94V-0	Gray • Black
9	Rubber feet	4	Polyurethane	Black
10	Carrying handle	1	PP + Elastomer	Gray • Black

■ Note: Front / rear panels are covered with a protective film on one side. Remove before assembly.

Accessories (Optional parts)



11 Mounting plate MSC series
See page MSC • MSCL-1



12 L-bracket MSCL series
See page MSC • MSCL-1





13 Tilt leg TL series
See page TL • CBF-1




Cable hook CBF series
See page TL • CBF-1

MSY dimensions

■ Drawings below are reference examples only.
DXF/DWG/PDF drawings available on our website.

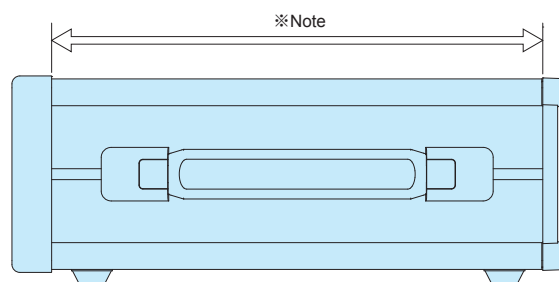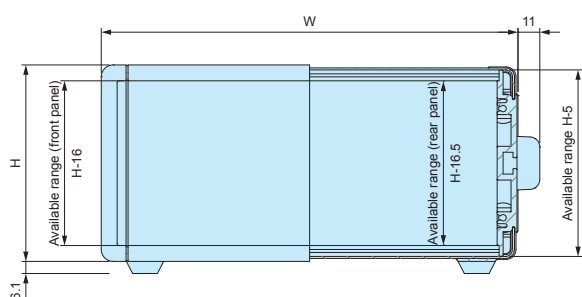

※ Note
Carrying handle location can be freely affixed within denoted range.

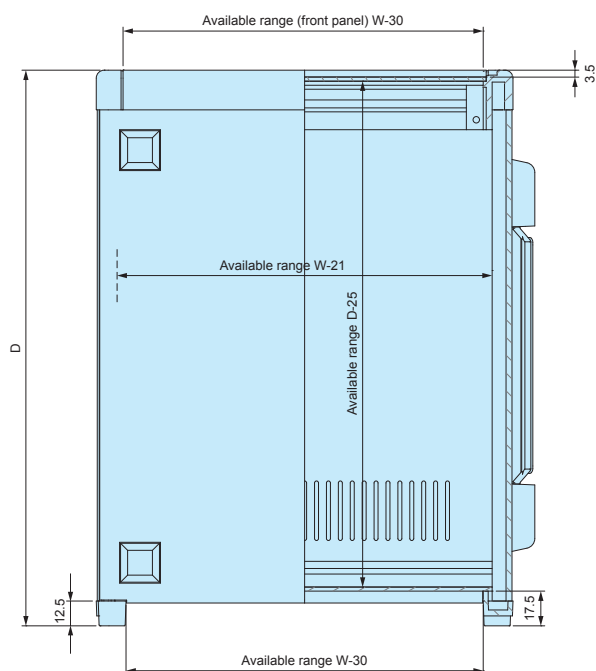

■ Top • Bottom cover of sizes 160×230, 160×280 do not have ventilation holes.

Color Type

■ Please suffix color code at the end of the product number.

● [GS]		● [B]		● [BS]	
Panel	Silver	Panel	Black	Panel	Silver
Top • Bottom cover	Light gray	Top • Bottom cover	Black	Top • Bottom cover	Black
Side frame	Gray	Side frame	Black	Side frame	Black

Product no. / Dimensions


Product no.	H	W	D	Weight (kg)
MSY 66-16-23 □	66	160	230	1.4
MSY 66-16-28 □	66	160	280	1.6
MSY 66-21-23 □	66	210	230	1.6
MSY 66-21-28 □	66	210	280	1.9
MSY 66-21-35 □	66	210	350	2.3
MSY 66-26-23 □	66	260	230	1.9
MSY 66-26-28 □	66	260	280	2.2
MSY 66-26-35 □	66	260	350	2.7
MSY 66-32-23 □	66	320	230	2.2
MSY 66-32-28 □	66	320	280	2.6
MSY 66-32-35 □	66	320	350	3.1
MSY 66-32-45 □	66	320	450	3.9
MSY 66-37-23 □	66	370	230	2.5
MSY 66-37-28 □	66	370	280	2.9
MSY 66-37-35 □	66	370	350	3.5
MSY 66-37-45 □	66	370	450	4.2
MSY 66-43-23 □	66	430	230	2.8
MSY 66-43-28 □	66	430	280	3.3
MSY 66-43-35 □	66	430	350	3.9
MSY 66-43-45 □	66	430	450	4.9
MSY 88-16-23 □	88	160	230	1.5
MSY 88-16-28 □	88	160	280	1.8
MSY 88-21-23 □	88	210	230	1.8
MSY 88-21-28 □	88	210	280	2.1
MSY 88-21-35 □	88	210	350	2.5
MSY 88-26-23 □	88	260	230	2.1
MSY 88-26-28 □	88	260	280	2.4
MSY 88-26-35 □	88	260	350	2.9
MSY 88-32-23 □	88	320	230	2.4
MSY 88-32-28 □	88	320	280	2.8
MSY 88-32-35 □	88	320	350	3.4
MSY 88-32-45 □	88	320	450	4.2
MSY 88-37-23 □	88	370	230	2.7
MSY 88-37-28 □	88	370	280	3.1
MSY 88-37-35 □	88	370	350	3.7
MSY 88-37-45 □	88	370	450	4.5
MSY 88-43-23 □	88	430	230	3.0
MSY 88-43-28 □	88	430	280	3.5
MSY 88-43-35 □	88	430	350	4.2
MSY 88-43-45 □	88	430	450	5.2

Product no.	H	W	D	Weight (kg)
MSY 99-16-23 □	99	160	230	1.6
MSY 99-16-28 □	99	160	280	1.8
MSY 99-21-23 □	99	210	230	1.8
MSY 99-21-28 □	99	210	280	2.1
MSY 99-21-35 □	99	210	350	2.6
MSY 99-26-23 □	99	260	230	2.2
MSY 99-26-28 □	99	260	280	2.5
MSY 99-26-35 □	99	260	350	3.0
MSY 99-32-23 □	99	320	230	2.5
MSY 99-32-28 □	99	320	280	2.9
MSY 99-32-35 □	99	320	350	3.5
MSY 99-32-45 □	99	320	450	4.3
MSY 99-37-23 □	99	370	230	2.7
MSY 99-37-28 □	99	370	280	3.2
MSY 99-37-35 □	99	370	350	3.8
MSY 99-37-45 □	99	370	450	4.6
MSY 99-43-23 □	99	430	230	3.1
MSY 99-43-28 □	99	430	280	3.6
MSY 99-43-35 □	99	430	350	4.3
MSY 99-43-45 □	99	430	450	5.3
MSY133-16-23 □	133	160	230	1.8
MSY133-16-28 □	133	160	280	2.1
MSY133-21-23 □	133	210	230	2.1
MSY133-21-28 □	133	210	280	2.4
MSY133-21-35 □	133	210	350	2.9
MSY133-26-23 □	133	260	230	2.4
MSY133-26-28 □	133	260	280	2.8
MSY133-26-35 □	133	260	350	3.3
MSY133-32-23 □	133	320	230	2.7
MSY133-32-28 □	133	320	280	3.2
MSY133-32-35 □	133	320	350	3.8
MSY133-32-45 □	133	320	450	4.6
MSY133-37-23 □	133	370	230	3.0
MSY133-37-28 □	133	370	280	3.5
MSY133-37-35 □	133	370	350	4.2
MSY133-37-45 □	133	370	450	5.0
MSY133-43-23 □	133	430	230	3.4
MSY133-43-28 □	133	430	280	3.9
MSY133-43-35 □	133	430	350	4.7
MSY133-43-45 □	133	430	450	5.8

Product no. / Dimensions


Product no.	H	W	D	Weight (kg)
MSY149-16-23 □	149	160	230	1.9
MSY149-16-28 □	149	160	280	2.2
MSY149-21-23 □	149	210	230	2.2
MSY149-21-28 □	149	210	280	2.5
MSY149-21-35 □	149	210	350	3.0
MSY149-26-23 □	149	260	230	2.5
MSY149-26-28 □	149	260	280	2.9
MSY149-26-35 □	149	260	350	3.4
MSY149-32-23 □	149	320	230	2.9
MSY149-32-28 □	149	320	280	3.3
MSY149-32-35 □	149	320	350	4.0
MSY149-32-45 □	149	320	450	4.9
MSY149-37-23 □	149	370	230	3.2
MSY149-37-28 □	149	370	280	3.7
MSY149-37-35 □	149	370	350	4.3
MSY149-37-45 □	149	370	450	5.2
MSY149-43-23 □	149	430	230	3.6
MSY149-43-28 □	149	430	280	4.1
MSY149-43-35 □	149	430	350	4.8
MSY149-43-45 □	149	430	450	6.0
MSY177-16-23 □	177	160	230	2.3
MSY177-16-28 □	177	160	280	2.6
MSY177-21-23 □	177	210	230	2.6
MSY177-21-28 □	177	210	280	3.0
MSY177-21-35 □	177	210	350	3.6
MSY177-26-23 □	177	260	230	3.0
MSY177-26-28 □	177	260	280	3.4
MSY177-26-35 □	177	260	350	4.0
MSY177-32-23 □	177	320	230	3.3
MSY177-32-28 □	177	320	280	3.8
MSY177-32-35 □	177	320	350	4.6
MSY177-32-45 □	177	320	450	5.6
MSY177-37-23 □	177	370	230	3.6
MSY177-37-28 □	177	370	280	4.2
MSY177-37-35 □	177	370	350	5.0
MSY177-37-45 □	177	370	450	5.9
MSY177-43-23 □	177	430	230	4.0
MSY177-43-28 □	177	430	280	4.6
MSY177-43-35 □	177	430	350	5.5
MSY177-43-45 □	177	430	450	6.7

Product no.	H	W	D	Weight (kg)
MSY199-16-23 □	199	160	230	2.4
MSY199-16-28 □	199	160	280	2.8
MSY199-21-23 □	199	210	230	2.7
MSY199-21-28 □	199	210	280	3.1
MSY199-21-35 □	199	210	350	3.7
MSY199-26-23 □	199	260	230	3.1
MSY199-26-28 □	199	260	280	3.5
MSY199-26-35 □	199	260	350	4.2
MSY199-32-23 □	199	320	230	3.5
MSY199-32-28 □	199	320	280	4.0
MSY199-32-35 □	199	320	350	4.7
MSY199-32-45 □	199	320	450	5.7
MSY199-37-23 □	199	370	230	3.8
MSY199-37-28 □	199	370	280	4.4
MSY199-37-35 □	199	370	350	5.1
MSY199-37-45 □	199	370	450	6.1
MSY199-43-23 □	199	430	230	4.2
MSY199-43-28 □	199	430	280	4.8
MSY199-43-35 □	199	430	350	5.6
MSY199-43-45 □	199	430	450	6.9
MSY222-16-23 □	222	160	230	2.5
MSY222-16-28 □	222	160	280	2.9
MSY222-21-23 □	222	210	230	2.9
MSY222-21-28 □	222	210	280	3.3
MSY222-21-35 □	222	210	350	3.9
MSY222-26-23 □	222	260	230	3.3
MSY222-26-28 □	222	260	280	3.7
MSY222-26-35 □	222	260	350	4.4
MSY222-32-23 □	222	320	230	3.6
MSY222-32-28 □	222	320	280	4.1
MSY222-32-35 □	222	320	350	4.9
MSY222-32-45 □	222	320	450	6.0
MSY222-37-23 □	222	370	230	4.0
MSY222-37-28 □	222	370	280	4.5
MSY222-37-35 □	222	370	350	5.3
MSY222-37-45 □	222	370	450	6.4
MSY222-43-23 □	222	430	230	4.4
MSY222-43-28 □	222	430	280	5.0
MSY222-43-35 □	222	430	350	5.9
MSY222-43-45 □	222	430	450	7.2

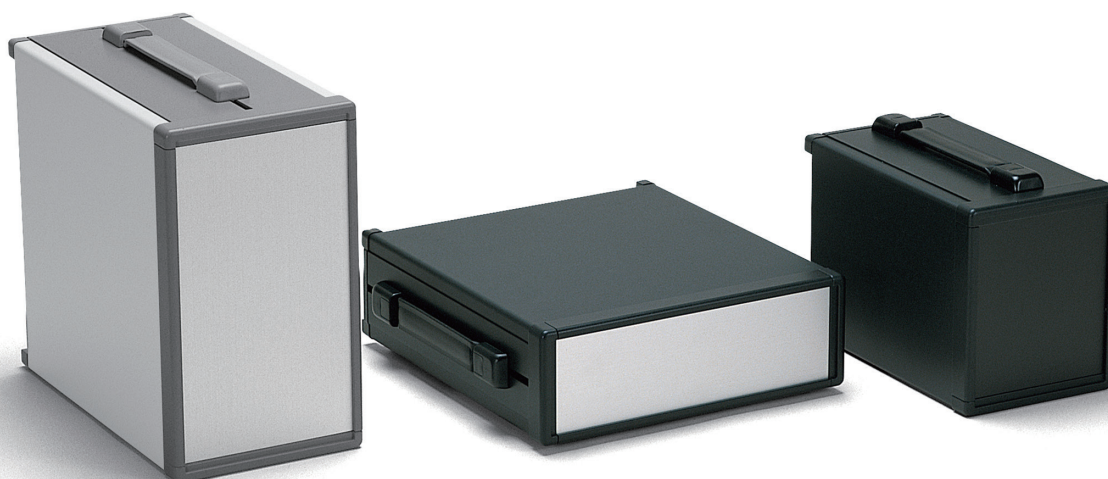

- Available in 3 different colors and 160 different sizes.
- Lightweight system case with carrying handle. Suitable for use as measuring instruments, etc.
- Maximum load support of 20kg.

Assembly drawings

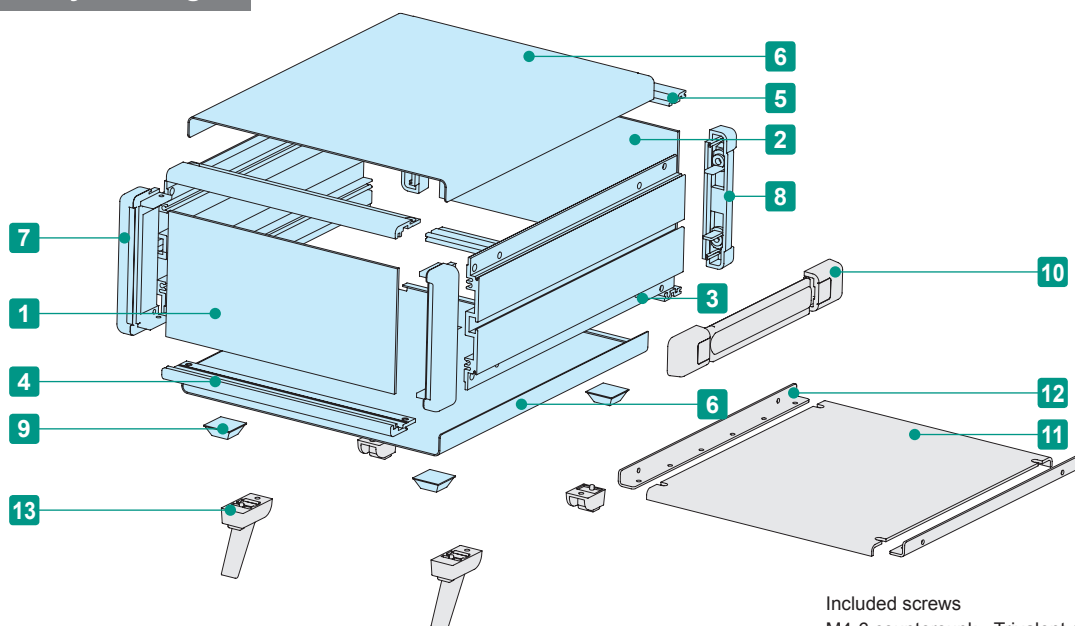


Included screws
 M4-6 countersunk • Trivalent chromate x 4 pcs
 M4-8 Pan head • Trivalent chromate x 8 pcs
 M4-10 Binding head • Black trivalent chromate x 4 pcs

Components

No.	Part name	Pcs	Material	Color / Finish
1	Front panel	1	Aluminium A1050P t=2.0	Silver • Black / Hairline brushed & Anodized
2	Rear panel	1	Aluminium A1050P t=2.0	Silver • Black / Anodized
3	Side frame	2	Extruded aluminium A6063S-T5	Gray • Black / Painted
4	Front frame	2	Extruded aluminium A6063S-T5	Gray • Black / Painted
5	Rear frame	2	Extruded aluminium A6063S-T5	Silver / Anodized
6	Top • Bottom cover	1 each	Aluminium A1100P t=1.0	Light gray • Black / Painted
7	Corner block	2	Diecast aluminium ADC12	Gray • Black / Painted
8	Rear feet	2	ABS UL94V-0	Gray • Black
9	Rubber feet	4	Polyurethane	Black
10	Carrying handle	1	PP + Elastomer	Gray • Black

■ Note: Front / rear panels and top / bottom covers are covered with a protective film on one side. Remove before assembly.

Accessories (Optional parts)



11 Mounting plate MSC series
See page MSC • MSCL-1



12 L-bracket MSCL series
See page MSC • MSCL-1






13 Tilt leg TL series
See page TL • CBF-1



Cable hook CBF series
See page TL • CBF-1

MOY dimensions

■ Drawings below are reference examples only.
DXF/DWG/PDF drawings available on our website.

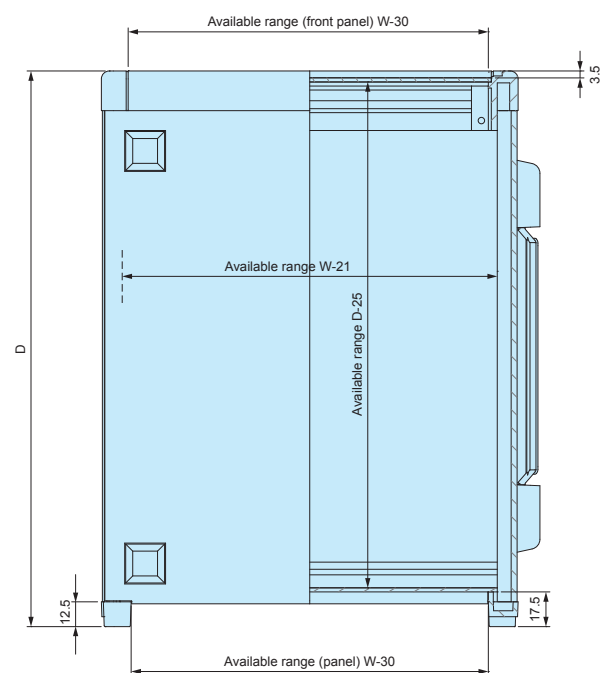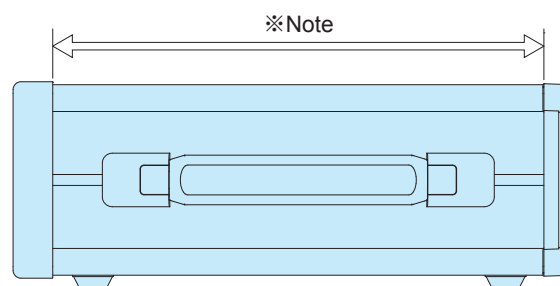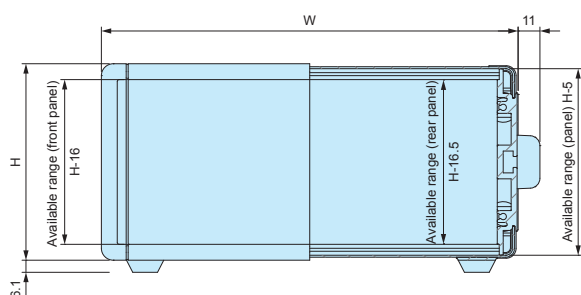

※Note
Carrying handle location can be freely affixed within denoted range.

Color Type

■ Please suffix color code at the end of the product number.



Panel	Silver
Top • Bottom cover	Light Gray
Side frame	Gray



Panel	Black
Top • Bottom cover	Black
Side frame	Black



Panel	Silver
Top • Bottom cover	Black
Side frame	Black

Product no. / Dimensions

Product no.	H	W	D	Weight (kg)
MOY 66-16-23 □	66	160	230	1.0
MOY 66-16-28 □	66	160	280	1.1
MOY 66-21-23 □	66	210	230	1.2
MOY 66-21-28 □	66	210	280	1.3
MOY 66-21-35 □	66	210	350	1.6
MOY 66-26-23 □	66	260	230	1.3
MOY 66-26-28 □	66	260	280	1.5
MOY 66-26-35 □	66	260	350	1.8
MOY 66-32-23 □	66	320	230	1.5
MOY 66-32-28 □	66	320	280	1.7
MOY 66-32-35 □	66	320	350	2.0
MOY 66-32-45 □	66	320	450	2.4
MOY 66-37-23 □	66	370	230	1.7
MOY 66-37-28 □	66	370	280	1.9
MOY 66-37-35 □	66	370	350	2.2
MOY 66-37-45 □	66	370	450	2.6
MOY 66-43-23 □	66	430	230	1.9
MOY 66-43-28 □	66	430	280	2.1
MOY 66-43-35 □	66	430	350	2.5
MOY 66-43-45 □	66	430	450	3.0
MOY 88-16-23 □	88	160	230	1.1
MOY 88-16-28 □	88	160	280	1.3
MOY 88-21-23 □	88	210	230	1.3
MOY 88-21-28 □	88	210	280	1.5
MOY 88-21-35 □	88	210	350	1.8
MOY 88-26-23 □	88	260	230	1.5
MOY 88-26-28 □	88	260	280	1.7
MOY 88-26-35 □	88	260	350	2.0
MOY 88-32-23 □	88	320	230	1.7
MOY 88-32-28 □	88	320	280	1.9
MOY 88-32-35 □	88	320	350	2.3
MOY 88-32-45 □	88	320	450	2.7
MOY 88-37-23 □	88	370	230	1.9
MOY 88-37-28 □	88	370	280	2.1
MOY 88-37-35 □	88	370	350	2.5
MOY 88-37-45 □	88	370	450	2.9
MOY 88-43-23 □	88	430	230	2.1
MOY 88-43-28 □	88	430	280	2.3
MOY 88-43-35 □	88	430	350	2.7
MOY 88-43-45 □	88	430	450	3.3

Product no.	H	W	D	Weight (kg)
MOY 99-16-23 □	99	160	230	1.2
MOY 99-16-28 □	99	160	280	1.4
MOY 99-21-23 □	99	210	230	1.4
MOY 99-21-28 □	99	210	280	1.6
MOY 99-21-35 □	99	210	350	1.8
MOY 99-26-23 □	99	260	230	1.6
MOY 99-26-28 □	99	260	280	1.8
MOY 99-26-35 □	99	260	350	2.1
MOY 99-32-23 □	99	320	230	1.8
MOY 99-32-28 □	99	320	280	2.0
MOY 99-32-35 □	99	320	350	2.4
MOY 99-32-45 □	99	320	450	2.8
MOY 99-37-23 □	99	370	230	2.0
MOY 99-37-28 □	99	370	280	2.2
MOY 99-37-35 □	99	370	350	2.6
MOY 99-37-45 □	99	370	450	3.0
MOY 99-43-23 □	99	430	230	2.2
MOY 99-43-28 □	99	430	280	2.4
MOY 99-43-35 □	99	430	350	2.8
MOY 99-43-45 □	99	430	450	3.4
MOY133-16-23 □	132.5	160	230	1.4
MOY133-16-28 □	132.5	160	280	1.6
MOY133-21-23 □	132.5	210	230	1.6
MOY133-21-28 □	132.5	210	280	1.8
MOY133-21-35 □	132.5	210	350	2.1
MOY133-26-23 □	132.5	260	230	1.8
MOY133-26-28 □	132.5	260	280	2.1
MOY133-26-35 □	132.5	260	350	2.4
MOY133-32-23 □	132.5	320	230	2.0
MOY133-32-28 □	132.5	320	280	2.3
MOY133-32-35 □	132.5	320	350	2.7
MOY133-32-45 □	132.5	320	450	3.2
MOY133-37-23 □	132.5	370	230	2.2
MOY133-37-28 □	132.5	370	280	2.5
MOY133-37-35 □	132.5	370	350	2.9
MOY133-37-45 □	132.5	370	450	3.4
MOY133-43-23 □	132.5	430	230	2.5
MOY133-43-28 □	132.5	430	280	2.8
MOY133-43-35 □	132.5	430	350	3.2
MOY133-43-45 □	132.5	430	450	3.8


Product no. / Dimensions

Product no.	H	W	D	Weight (kg)
MOY149-16-23 □	149	160	230	1.5
MOY149-16-28 □	149	160	280	1.7
MOY149-21-23 □	149	210	230	1.7
MOY149-21-28 □	149	210	280	2.0
MOY149-21-35 □	149	210	350	2.3
MOY149-26-23 □	149	260	230	2.0
MOY149-26-28 □	149	260	280	2.2
MOY149-26-35 □	149	260	350	2.5
MOY149-32-23 □	149	320	230	2.2
MOY149-32-28 □	149	320	280	2.4
MOY149-32-35 □	149	320	350	2.8
MOY149-32-45 □	149	320	450	3.4
MOY149-37-23 □	149	370	230	2.4
MOY149-37-28 □	149	370	280	2.7
MOY149-37-35 □	149	370	350	3.1
MOY149-37-45 □	149	370	450	3.6
MOY149-43-23 □	149	430	230	2.6
MOY149-43-28 □	149	430	280	3.0
MOY149-43-35 □	149	430	350	3.4
MOY149-43-45 □	149	430	450	4.1
MOY177-16-23 □	177	160	230	1.9
MOY177-16-28 □	177	160	280	2.2
MOY177-21-23 □	177	210	230	2.1
MOY177-21-28 □	177	210	280	2.4
MOY177-21-35 □	177	210	350	2.8
MOY177-26-23 □	177	260	230	2.4
MOY177-26-28 □	177	260	280	2.7
MOY177-26-35 □	177	260	350	3.1
MOY177-32-23 □	177	320	230	2.6
MOY177-32-28 □	177	320	280	2.9
MOY177-32-35 □	177	320	350	3.4
MOY177-32-45 □	177	320	450	4.1
MOY177-37-23 □	177	370	230	2.8
MOY177-37-28 □	177	370	280	3.2
MOY177-37-35 □	177	370	350	3.7
MOY177-37-45 □	177	370	450	4.3
MOY177-43-23 □	177	430	230	3.1
MOY177-43-28 □	177	430	280	3.5
MOY177-43-35 □	177	430	350	4.0
MOY177-43-45 □	177	430	450	4.8


Product no.	H	W	D	Weight (kg)
MOY199-16-23 □	199	160	230	2.0
MOY199-16-28 □	199	160	280	2.3
MOY199-21-23 □	199	210	230	2.2
MOY199-21-28 □	199	210	280	2.5
MOY199-21-35 □	199	210	350	2.9
MOY199-26-23 □	199	260	230	2.5
MOY199-26-28 □	199	260	280	2.8
MOY199-26-35 □	199	260	350	3.2
MOY199-32-23 □	199	320	230	2.7
MOY199-32-28 □	199	320	280	3.1
MOY199-32-35 □	199	320	350	3.6
MOY199-32-45 □	199	320	450	4.2
MOY199-37-23 □	199	370	230	3.0
MOY199-37-28 □	199	370	280	3.3
MOY199-37-35 □	199	370	350	3.8
MOY199-37-45 □	199	370	450	4.5
MOY199-43-23 □	199	430	230	3.6
MOY199-43-28 □	199	430	280	3.9
MOY199-43-35 □	199	430	350	4.5
MOY199-43-45 □	199	430	450	5.2
MOY222-16-23 □	221.5	160	230	2.2
MOY222-16-28 □	221.5	160	280	2.4
MOY222-21-23 □	221.5	210	230	2.4
MOY222-21-28 □	221.5	210	280	2.7
MOY222-21-35 □	221.5	210	350	3.1
MOY222-26-23 □	221.5	260	230	2.7
MOY222-26-28 □	221.5	260	280	2.9
MOY222-26-35 □	221.5	260	350	3.4
MOY222-32-23 □	221.5	320	230	2.9
MOY222-32-28 □	221.5	320	280	3.3
MOY222-32-35 □	221.5	320	350	3.8
MOY222-32-45 □	221.5	320	450	4.6
MOY222-37-23 □	221.5	370	230	3.2
MOY222-37-28 □	221.5	370	280	3.5
MOY222-37-35 □	221.5	370	350	4.1
MOY222-37-45 □	221.5	370	450	4.8
MOY222-43-23 □	221.5	430	230	3.5
MOY222-43-28 □	221.5	430	280	3.8
MOY222-43-35 □	221.5	430	350	4.4
MOY222-43-45 □	221.5	430	450	5.3



- Aluminium case equipped with shockproof and anti-slip elastomer corner guards.
- Suitable to be used as a fanless PC, power supply, power storage device etc.
Carrying handle can withstand a maximum load up to 30.0 kg.
- Corner guards are available in 4 different color variations.
- Custom sizes available.

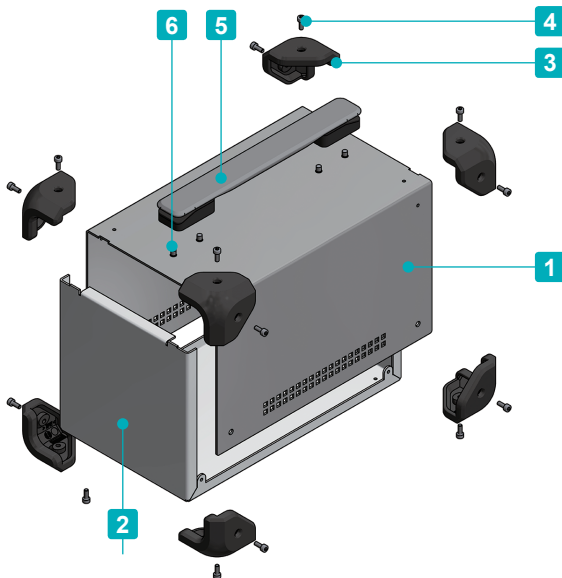

- Aluminium case and corner guard with screw fastening.

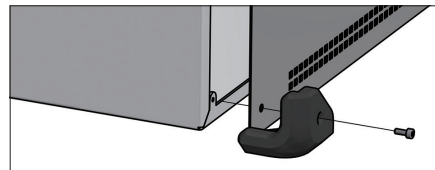

Included screws
Case / Corner guard - M4-8 Hexagonal x 16 or 18 pcs
Carrying handle - M5-8 x 4 pcs
※Hexagonal wrench included.

Components

No.	Part name	Pcs	Material	Color / Finish
1	Top cover	1	Steel SECC t=10	Black / Painted
			Aluminium A1100P t=1.5	Metallic silver / Painted (Conductive inside)
2	Base	1	Aluminium A1050P t=1.5	Black / Painted
			Aluminium A1100P t=1.5	Metallic silver / Painted (Conductive inside)
3	Corner guard	8	TPE	Black • Gray • Navy • Red
4	Case / Corner guard screw	16 / 18	Steel	Black trivalent chromate
5	Carrying handle	1	PU • PA6 • ABS • Steel	Black • Gray
6	Carrying handle screw	4	Steel	Trivalent chromate


- Top cover and base are covered with a protective film on one side.

Color Type

Code	B B Black / Black	B G Black / Gray	B N Black / Navy	B R Black / Red
Color				
Code	S B Silver / Black Conductive	S G Silver / Gray Conductive	S N Silver / Navy Conductive	S R Silver / Red Conductive
Color				

MCG dimensions

■ DXF/DWG/PDF/STP drawings available on our website.

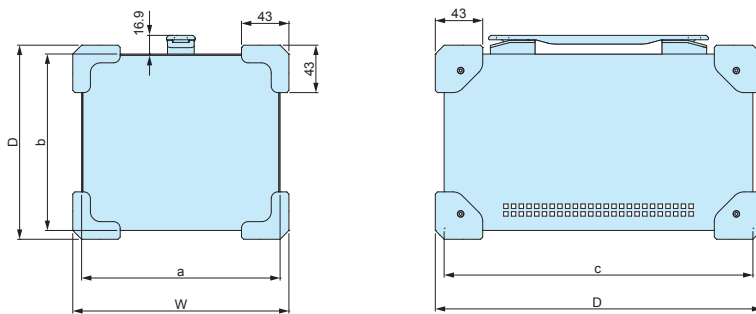

Product no. / Dimensions


■ Please suffix color code at the end of the product number.

Product no.	W	H	D	a	b	c	Weight (kg)	
							B □ models	S □ models
MCG14-14-23□□	156	156	246	140	140	230	1.2	0.9
MCG18-16-28□□	196	176	296	180	160	280	1.8	1.3
MCG21-14-24□□	226	156	256	210	140	240	1.6	1.2
MCG26-18-30□□	276	196	316	260	180	300	2.3	1.6

Accessories (Optional parts)

MG-1 CORNER GUARD

MG-1 dimensions

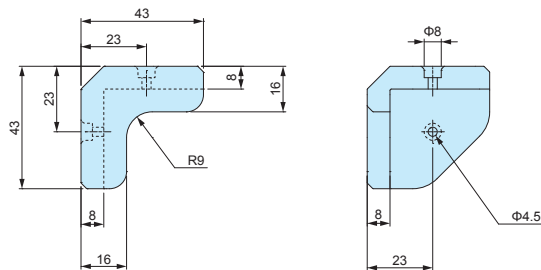

- Corner guard part for MCG case.
- Corner guard can be installed on enclosures other than MCG series.
- M4 thread holes are required for installation.
- Available in 4 different color variations.

■ DXF/DWG/PDF/STP drawings available on our website.


Components

No.	Part name	Material
1	Corner guard	TPE
2	Screw (M4-8 Hexagonal)	Steel


Product no. / Details

Product no.				Weight (g)	Pack of
Black	Gray	Navy	Red		
MG-1B	MG-1G	MG-1N	MG-1R	124	8

Included screw : M4-8 Hexagonal : Steel : Black trivalent chromate x 18 pcs + Hexagonal wrench

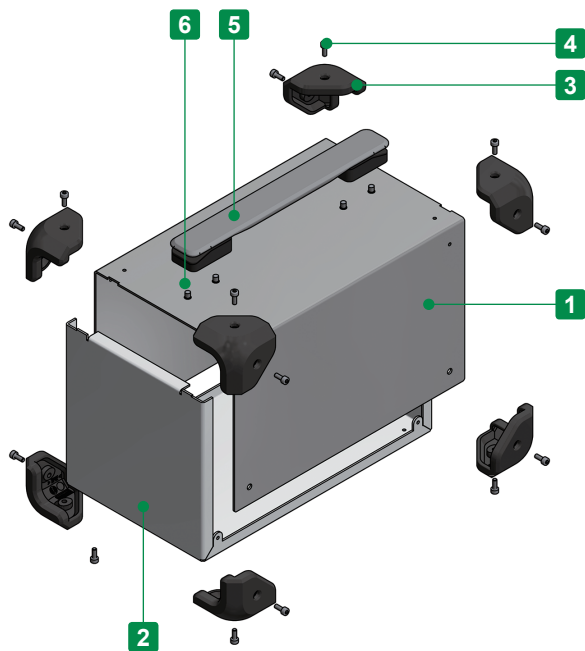

- Custom sized aluminium case with shockproof and anti-slip elastomer corner guards.
- Adjustable sizes available in 1mm intervals, with W dimension from 150 ~ 500mm, D dimension from 150 ~ 400mm, and H dimension from 80 ~ 250mm.
- Corner guards are available in 4 different color variations.
- Customizable with, and without carrying handles.
- A conductive coating is applied onto the internal surface, allowing it to be conductive.
- Aluminium case and corner guard with screw fastening.

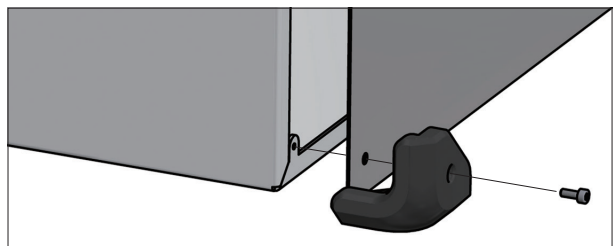

Components


No.	Part name	Pcs	Material	Color / Finish
1	Top Cover	1	Aluminium A1100P t=1.5	Metallic silver / Painted : Conductive coated internal surface
2	Base	1	Aluminium A1100P t=1.5	Metallic silver / Painted : Conductive coated internal surface
3	Corner guard	8	TPE	Black • Gray • Navy • Red
4	Case / Corner guard screw (Hexagonal M4-8)	16/18/20	Steel	Black trivalent chromate
5	Carrying handle	1	PU • PA6 • ABS • Steel	Black • Gray
6	Carrying handle screw (M5-8)	4	Steel	Trivalent chromate

■ Hexagonal wrench included.

■ No. 5 and 6 are available for carrying handle types only.

1 Specify Dimensions

Specify dimensions in 1mm intervals.

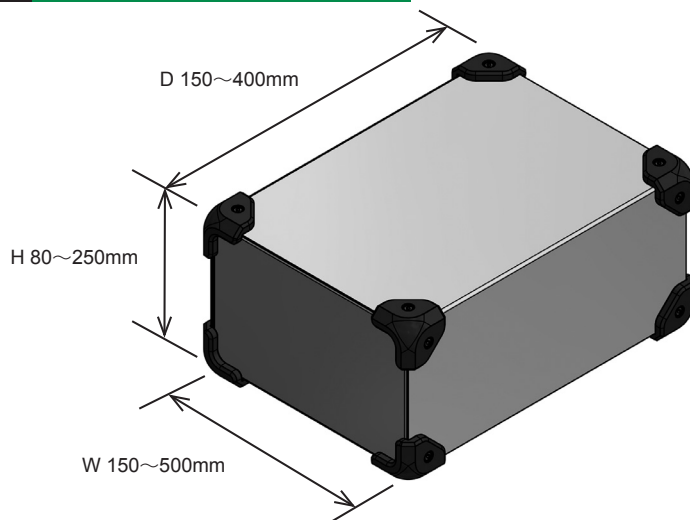

Caution

- W / H / D dimensions are external dimensions of stainless steel case only.
(Exclude corner guard dimensions)
- Refer to the chart on page MCGF-3 for available dimensions.
- Carrying handle is set to the center of top face.
(Carrying handle is not available for D length of 224mm and smaller.)

2 Select Color Type

Code	S B Silver / Black	S G Silver / Gray	S N Silver / Navy	S R Silver / Red
Color				

3 Select Handle Type

- Carrying handle model is not available for D length of 224mm and smaller.


Black handle **B**



Gray handle **G**



No handle **N**

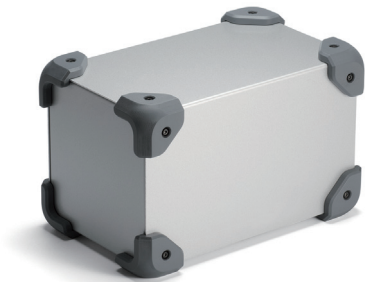

Confirm Product No.

Confirm an assigned product number in the following order format as below.

Product no. MCGF

	-		-			-	
W		H		D	Color code		Handle Type

Example : W = 186 mm, H = 152 mm, D = 245 mm, Silver / Navy color, with Gray handle

MCGF - - -

Lead time

Custom Size Only
Custom Size + Hole Milling

7 business days (1 ~ 3 pcs)
10 business days (1 ~ 3 pcs)

Order Inquiry

For more information, contact us here at sales@takachi-el.co.jp

MCGF Size Chart

Refer to the below chart for available sizes.


■ [—] sizes are not available.

■ Models with carrying handle, and W dimension of 200mm or larger requires 2 additional screws for assembly.

W	H	D	16 screw fixing points						18 screw fixing points			
			150~174	175~199	200~224	225~249	250~274	275~299	300~324	325~349	350~374	375~400
150~199	80~99	100~124	○	○	○	○	○	○	○	○	○	○
		125~149	○	○	○	○	○	○	○	○	○	○
200~249	80~99	100~124	○	○	○	○	○	○	○	○	○	○
		125~149	○	○	○	○	○	○	○	○	○	○
		150~174	—	—	○	○	○	○	○	○	○	○
		175~199	—	—	—	○	○	○	○	○	○	○
		200~224	—	—	—	—	○	○	○	○	○	○
250~299	80~99	100~124	○	○	○	○	○	○	○	○	○	○
		125~149	○	○	○	○	○	○	○	○	○	○
		150~174	—	—	○	○	○	○	○	○	○	○
		175~199	—	—	—	○	○	○	○	○	○	○
		200~224	—	—	—	—	○	○	○	○	○	○
		225~250	—	—	—	—	—	○	○	○	○	○
300~349	80~99	100~124	○	○	○	○	○	○	○	○	○	○
		125~149	○	○	○	○	○	○	○	○	○	○
		150~174	—	—	○	○	○	○	○	○	○	○
		175~199	—	—	—	○	○	○	○	○	○	○
		200~224	—	—	—	—	○	○	○	○	○	○
		225~250	—	—	—	—	—	○	○	○	○	○
		250~274	—	—	—	—	—	○	○	○	○	○
350~399	80~99	100~124	○	○	○	○	○	○	○	○	○	○
		125~149	○	○	○	○	○	○	○	○	○	○
		150~174	—	—	○	○	○	○	○	○	○	○
		175~199	—	—	—	○	○	○	○	○	○	○
		200~224	—	—	—	—	○	○	○	○	○	○
		225~250	—	—	—	—	—	○	○	○	○	○
		250~274	—	—	—	—	—	○	○	○	○	○
400~449	80~99	100~124	○	○	○	○	○	○	○	○	○	○
		125~149	○	○	○	○	○	○	○	○	○	○
		150~174	—	—	○	○	○	○	○	○	○	○
		175~199	—	—	—	○	○	○	○	○	○	○
		200~224	—	—	—	—	○	○	○	○	○	○
		225~250	—	—	—	—	—	○	○	○	○	○
		250~274	—	—	—	—	—	○	○	○	○	○
450~500	80~99	100~124	○	○	○	○	○	○	○	○	○	○
		125~149	○	○	○	○	○	○	○	○	○	○
		150~174	—	—	○	○	○	○	○	○	○	○
		175~199	—	—	—	○	○	○	○	○	○	○
		200~224	—	—	—	—	○	○	○	○	○	○
		225~250	—	—	—	—	—	○	○	○	○	○
		250~274	—	—	—	—	—	○	○	○	○	○



■ Carrying handle model is not available for D length of 224mm and smaller.

MCGF dimensions


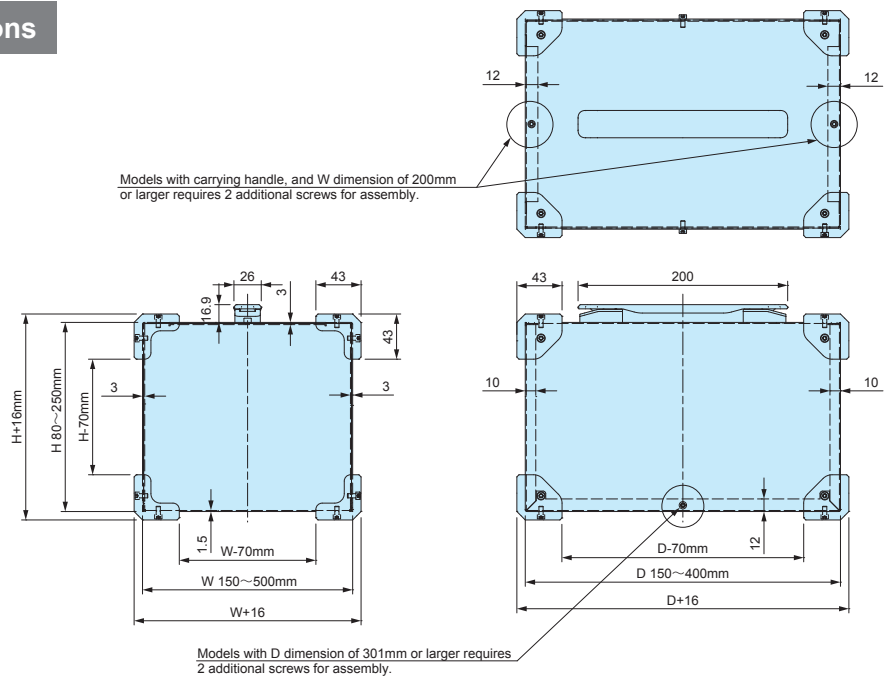


CUSTOMIZATION EXAMPLE


PUNCH PRESS

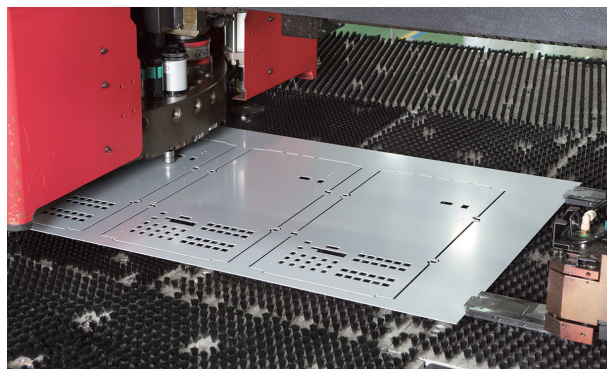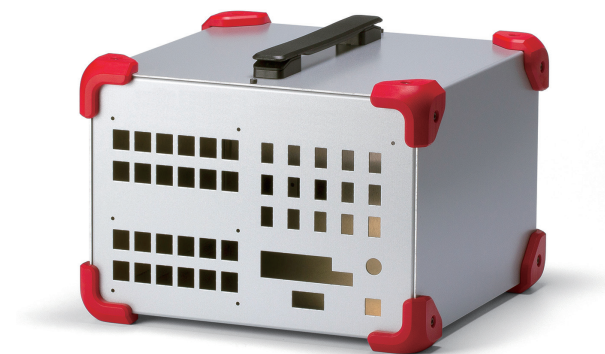

INKJET PRINTING

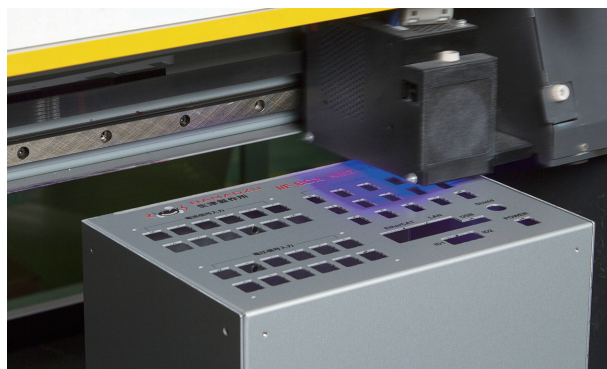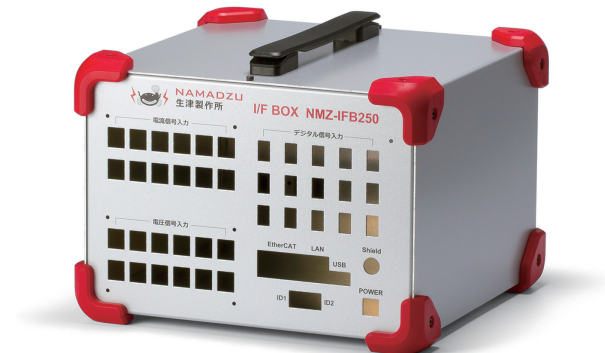

SELF CLINCHING STANDOFF


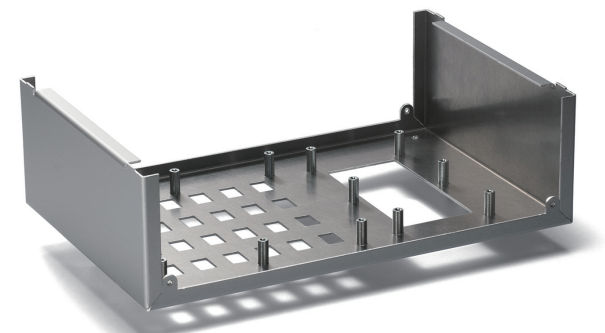


MSC series


MOUNTING PLATE for MS

MSC dimensions

■ DXF/DWG/PDF/STP drawings available on our website.

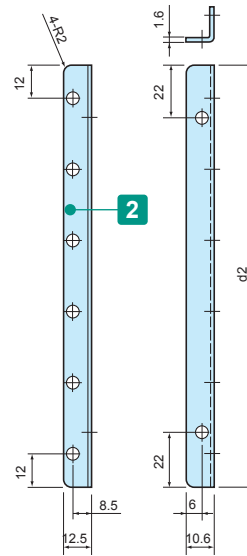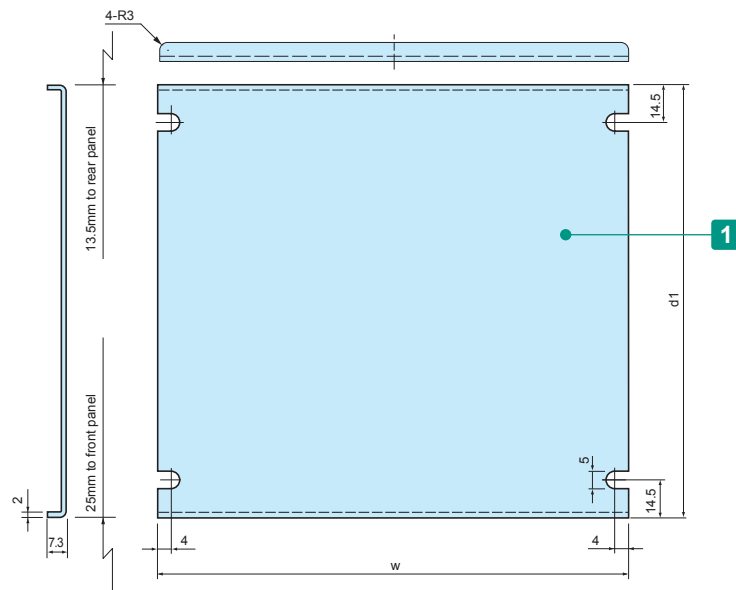

Mounting example

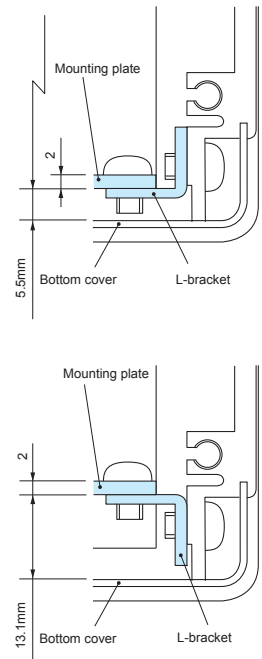

Components

No.	Part name	Pcs	Material	Color / Finish
1	Mounting plate	1	Aluminium A1050P t=2.0	Unfinished
2	L-bracket	2	Steel SPCC	Trivalent chromate

Included screws: M4-6 pan head, trivalent chromate x8


Product no. / Details

Product no.	w	d1	d2	Enclosure W×D	Weight (g)
MSC16-16	130	96.5	91.5	160 × 160	120
MSC16-23	130	166.5	161.5	160 × 230	210
MSC16-28	130	216.5	211.5	160 × 280	270
MSC21-16	180	96.5	91.5	210 × 160	150
MSC21-23	180	166.5	161.5	210 × 230	250
MSC21-28	180	216.5	211.5	210 × 280	330
MSC21-35	180	286.5	281.5	210 × 350	430
MSC26-23	230	166.5	161.5	260 × 230	300
MSC26-28	230	216.5	211.5	260 × 280	390
MSC26-35	230	286.5	281.5	260 × 350	510
MSC32-23	290	166.5	161.5	320 × 230	360

Product no.	w	d1	d2	Enclosure W×D	Weight (g)
MSC32-28	290	216.5	211.5	320 × 280	460
MSC32-35	290	286.5	281.5	320 × 350	600
MSC32-45	290	386.5	381.5	320 × 450	810
MSC37-23	340	166.5	161.5	370 × 230	410
MSC37-28	340	216.5	211.5	370 × 280	520
MSC37-35	340	286.5	281.5	370 × 350	680
MSC37-45	340	386.5	381.5	370 × 450	910
MSC43-23	400	166.5	161.5	430 × 230	460
MSC43-28	400	216.5	211.5	430 × 280	590
MSC43-35	400	286.5	281.5	430 × 350	770
MSC43-45	400	386.5	381.5	430 × 450	1,040

MSCL series

L-BRACKET for MS

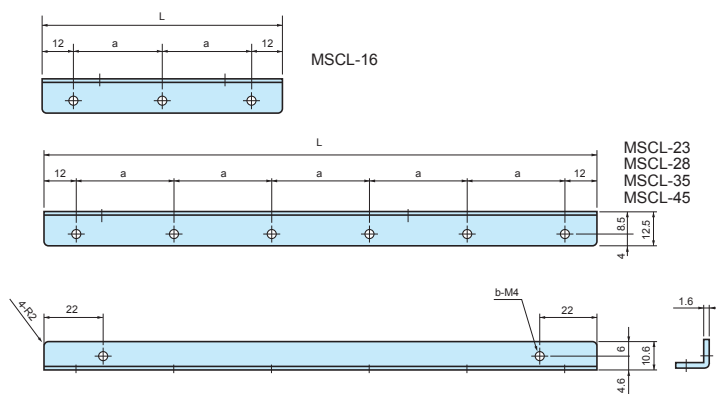

- Use with your original mounting plate or PCB.
- 1 pair of L-bracket are included with each MSC mounting plate.

Components

Part name	Material	Color / Finish
L-bracket	Steel SPCC	Trivalent chromate

Product no. / Details

Product no.	L	a	b	Sales unit
MSCL-16	91.5	33.75	5	1 set (2 pcs)
MSCL-23	161.5	27.5	8	1 set (2 pcs)
MSCL-28	211.5	37.5	8	1 set (2 pcs)
MSCL-35	281.5	51.5	8	1 set (2 pcs)
MSCL-45	381.5	71.5	8	1 set (2 pcs)

MSM SERIES

RACK MOUNT BRACKET

Components

Material	Color / Finish
Extruded aluminium A6063S-T5	Gray • Black / Painted

Included screws : M5-10 Flat head x 4 pcs / Black trivalent chromate + Nut x 4 pcs



Color Type

Color code	Material	Color / Finish
G	Extruded aluminium A6063S-T5	Gray / Painted
B	Extruded aluminium A6063S-T5	Black / Painted

Product no. / Dimensions

Product no.	h (Enclosure H)	a	Pack of
MSM- 88□	88	76.2	2
MSM-133□	132.5	57.1	2
MSM-177□	177	101.6	2
MSM-222□	221.5	146	2


■ Please suffix color code at the end of the product number.

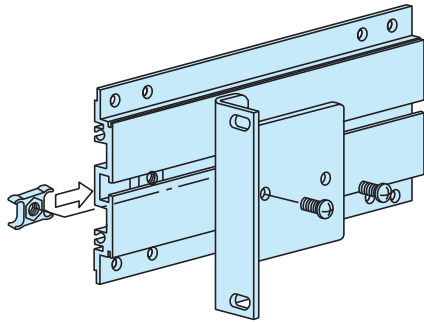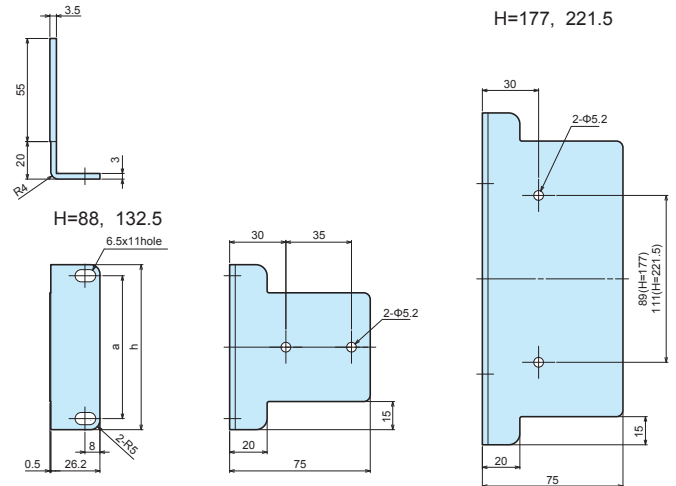

MZ SERIES

SIDE FRAME NUT

■ Side frame nut for MS • MSN • MSY • MSR • MO • MON • MOY • MOR series.

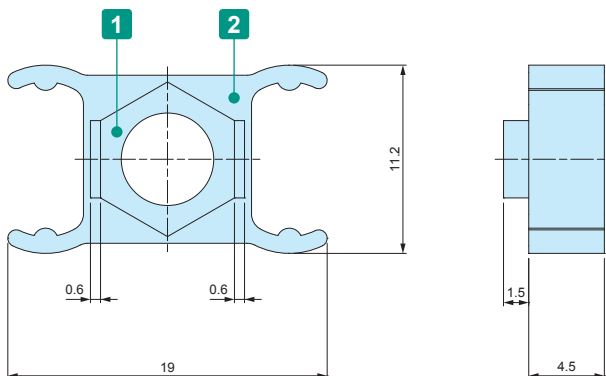

Components

No.	Part name	Material	Color / Finish
1	Nut	Brass • Steel	Nickel plated
2	Holder	Polyethylene	Black

Product no. / Feature


Product no.	Screw size	Nut material	Pack of
MZ-4	M4	Brass	10
MZ-5	M5	Steel	10

TL series

TILT LEG

TL dimensions

■ DXF/DWG/PDF drawings available on our website.

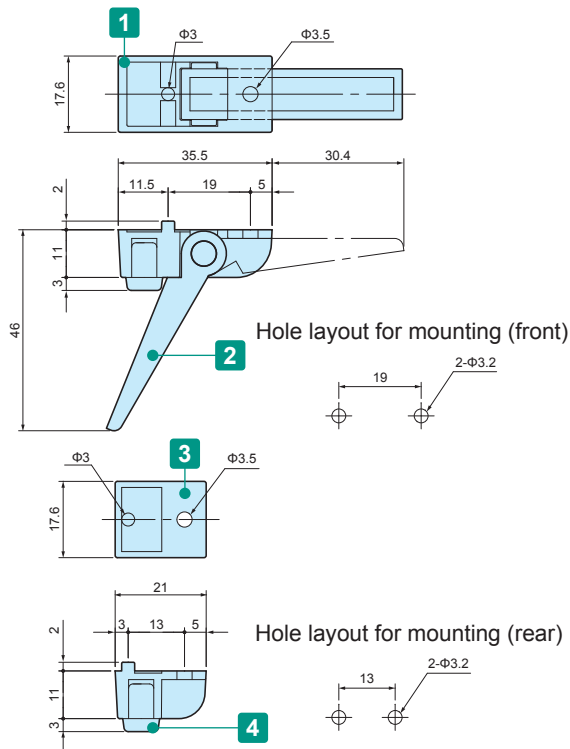

Components

* Maximum load = 7 kg

No.	Part name	Pcs	Material	Color / Finish
1	Front feet	2	ABS UL94HB	Black • Light gray • Dark gray
2	Leg	2	ABS UL94HB	Black • Light gray • Dark gray
3	Rear feet	2	ABS UL94HB	Black • Light gray • Dark gray
4	Rubber feet	4	EPDM	Gray • Black
-	Screw	4	Steel	Black trivalent chromate


■ Included screws: M3-8 and M3 nut (with washer) set.

Product no. / Details

Product no.	Color (body)	Color (rubber feet)	Sales unit
● TL-45BB	Black	Black	1 set
○ TL-45SG	Light gray	Gray	1 set
● TL-45DG	Dark gray	Gray	1 set

■ EPDM (black) may have its color migrate onto the placement surface.

MS SERIES INSTALLATION AREA

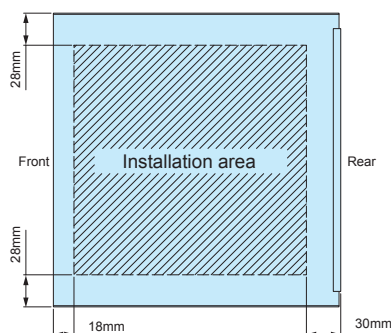

CBF-1G

CABLE HOOK



- Used for wrapping and securing cords and wires.
- Can be used with a variety of different enclosure series and models.
- Requires a panel thickness of between 1.0 ~ 3.0mm.

Product no. / Details


Product no.	Material	Color	Pack of
CBF-1G	ABS UL94HB	Gray	4

■ Included screws: M3-8 trivalent chromate (with washer) x 4 pcs



CBF dimensions

APPLICATION EXAMPLE

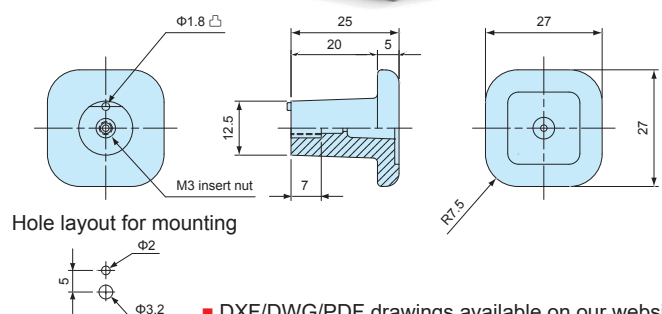

■ DXF/DWG/PDF drawings available on our website.