
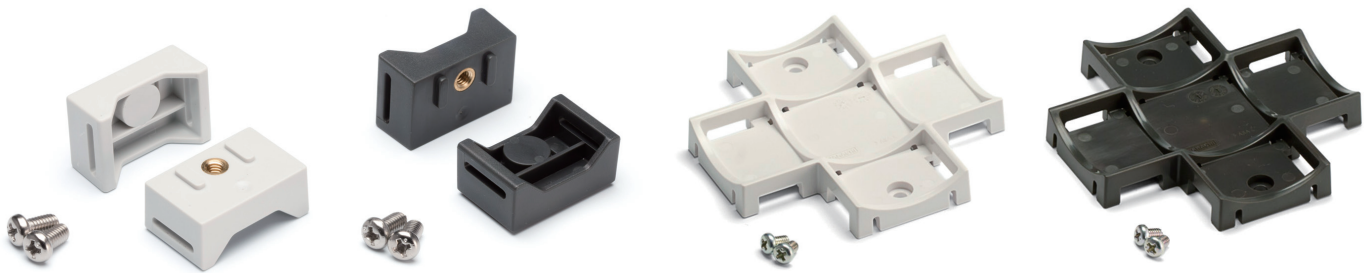


WPMB series**POLE MOUNTING BRACKET for WP**

- Pole mount bracket made from weather resistant ASA material.
- Hole milling is not required when installing the mount bracket, thus allowing the enclosure to maintain its IP67 protection.
- WPMB-M4-2 can be used for both vertical and horizontal installation.
- Together with WPMB series, the PKB series mounting belt allows the unit to be mounted onto a pole.

WPMB dimensions

■ DXF/DWG/PDF/STP drawings available on our website.

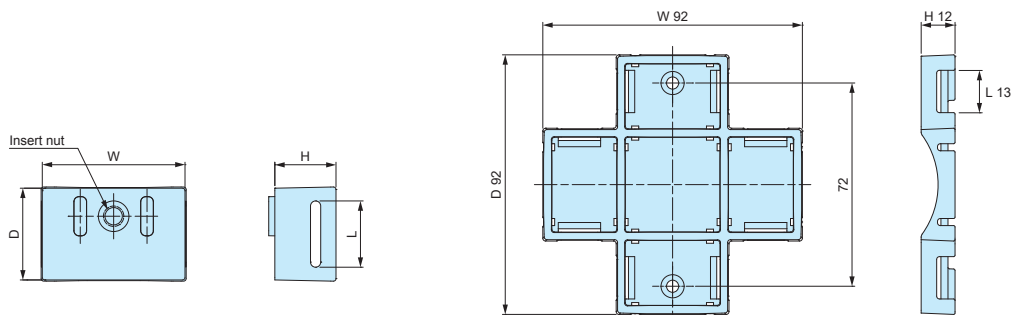

WPMB-M3 • WPMB-M4

WPMB-M4-2

Color Type

Code	Color
G	White gray
D	Dark gray

Product no. / Details



■ Please suffix color code at the end of the product number.

Product no.	Dimensions				Screw	Suitable models	Recommended torque (N • m)	Weight (g)	Pack of
	W	D	H	L					
WPMB-M3□	18	14	9.5	11	Stainless steel M3-6 x 2 pcs	WP5-7-2 • 5-7-3 • 6-8-2 • 6-8-3 • 8-8-2 • 8-8-4 • 8-10-2 • 8-10-4	0.4 ~ 0.45	3	2
WPMB-M4□	28	18	12	13	Stainless steel M4-8 x 2 pcs	WP9-13-3 • 9-13-4 • 10-10-3 • 10-10-4 • 11-15-3 • 11-15-4 • 13-18-3 • 13-18-5	0.45 ~ 0.5	10	2
WPMB-M4-2□	92	92	12	13	Stainless steel M4-6 x 2 pcs	WP15-15-4 • 15-15-6 • 15-21-4 • 15-21-6 • 20-20-5 • 20-20-7 • 20-28-5 • 20-28-7	0.45 ~ 0.5	24	1

■ Recommended torque listed is for reference only; actual may differ. Assemble after testing torque.

WPMB-M3 / WPMB-M4

WPMB-M4-2

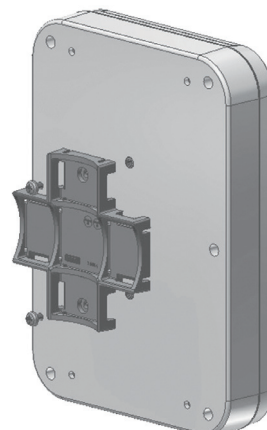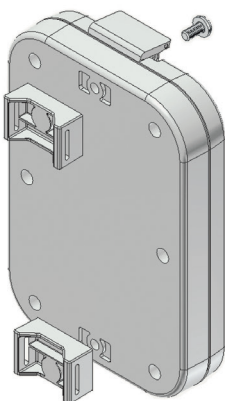

PKB series**POLE MOUNTING BELT**

PKB-10PM, 10P




PKB-10S, 20S

- Pole mounting belt for attachment of enclosures with suitable pole mount brackets or construction onto poles.
- Designed for one time use only (not reusable).
- Strong stainless steel clamping type and easy installation plastic type are available.


PKB dimensions

■ DXF/DWG/PDF drawings available on our website.


PKB-10PM, 10P

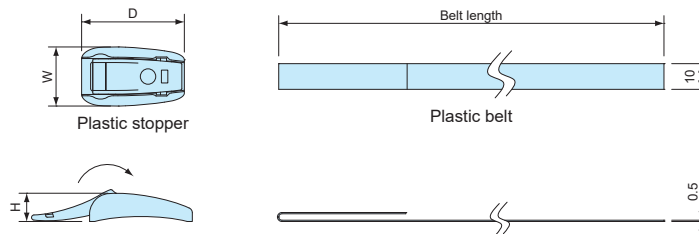

PKB-10S

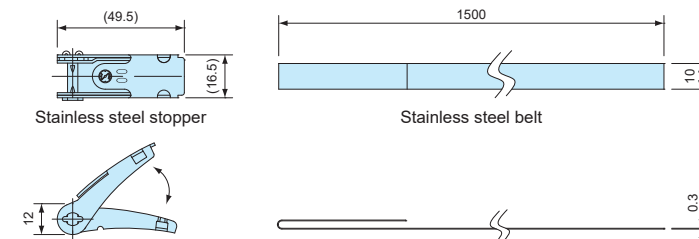

PKB-20S

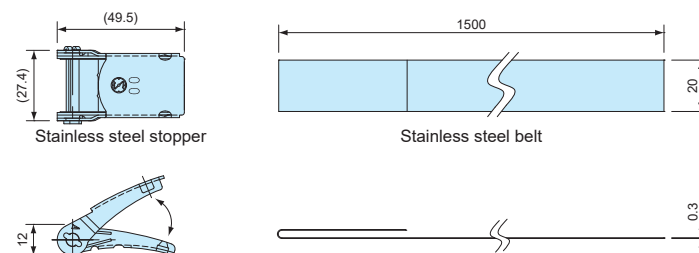**Components**

Part name	Material	Color / Finish
Stopper	Stainless steel SUS304 • POM	Barrel finish • Black
Belt	Stainless steel SUS430 • PET	Bright annealed finish • Gray

Product no. / Details

Product no.	W	D	H	Belt length	Belt material	Tensile strength (horizontal)	Weight (g)	Pack of
PKB-10PM	23	24	11	500 mm	PET	0.8kN	14	2
PKB-10P	23	40	11	1,500 mm	PET	1.3kN	31.8	2
PKB-10S	—	—	—	1,500 mm	Stainless steel SUS304	1.4kN	101.6	2
PKB-20S	—	—	—	1,500 mm	Stainless steel SUS430	2.9kN	182.2	2